


Feature	Feature			Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S		
Create new customer account	5.714 s	1	0	1	0	3	3	0	0		


Tag		Scer	nario			Fea	ure	
Name	Т	P	F	S	Т	P	F	S
@AlertMessage	1	0	1	0	1	0	1	0

FEATURES SUMMARY

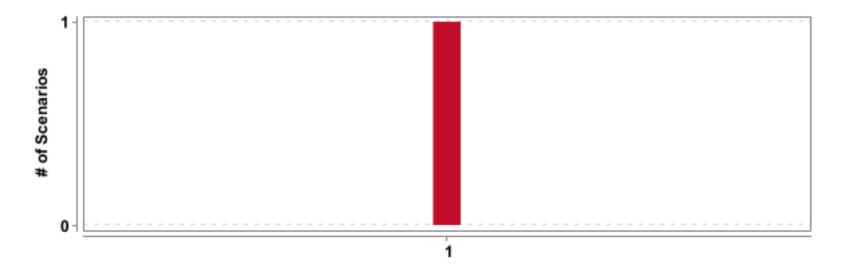

#	Feature Name	T	P	F	S	Duration
1	Create new customer account	1	0	1	0	5.714 s

SCENARIOS SUMMARY -- 5 --

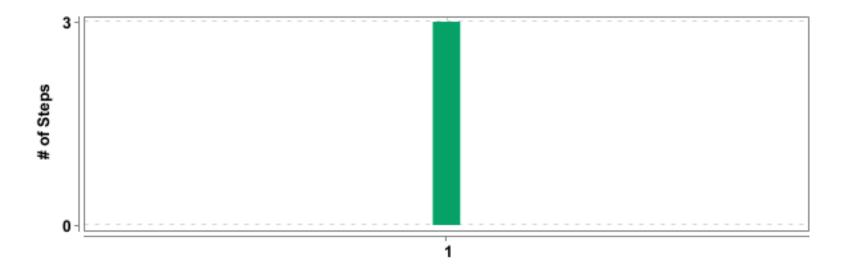


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Create new customer account	Validate error messages when invalid email and mismatched password are entered	3	3	0	0	5.714 s

DETAILED SECTION -- 6 --

Create new customer account

FAILED	DURATION - 5.714 s			
/ 1:00:32.848 pm // 1	:00:38.562 pm /	Total - 1 Pass - 0	Total - 3 Pass - 3	3
		Fail - 1 Skip - 0	Fail - 0 Skip - 0	

Validate error messages when invalid email and mismatched password are entered

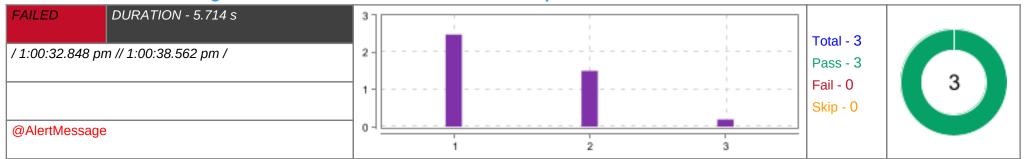

#	Step / Hook Details	Status	Duration
1	When I login with the website1	PASSED	2.477 s
2	When user enters invalid details for account creation	PASSED	1.501 s
3	Then user should see error messages for invalid email and mismatched password	PASSED	0.193 s
	AFTER - com.cucumber.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.008 s
	org.openqa.selenium.NoSuchSessionException: Session ID is null. Using WebDriver after calling quit()? Build info: version: '4.17.0', revision: 'e52b1be057*' System info: os.name: 'Windows 11', os.arch: 'amd64', os.version: '10.0', java.version: '21.0.7' Driver info: org.openqa.selenium. chrome.ChromeDriver Command: [null, close {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 139.0.7258.67, chrome: {chromedriverVersion: 139.0.7258.138 (884e54ea8d4, userDataDir: C:\Users\RAKESH~1\AppData\L}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:61061}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:61061/devtoo, se:cdpVersion: 139.0.7258.67, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:vitualAuthenticators: true} at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:151) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:216) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:519) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:592)		

-- 7 --

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:596) at org.openqa.selenium.remote.RemoteWebDriver.close(RemoteWebDriver.java:406) at com.cucumber.Hooks.tearDown(Hooks.java:46)		