

# mpl-interactions: A Python package for Interactive Matplotlib Figures

Ian Hunt-Isaak<sup>1</sup>, John Russell<sup>1</sup>, and Doeke Hekstra<sup>1,2</sup>

<sup>1</sup> John A. Paulson School of Engineering and Applied Sciences, Harvard University, Cambridge, MA, USA <sup>2</sup> Department of Molecular and Cellular Biology, Harvard University, Cambridge, MA, USA

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Antonia Mey](#)

## Reviewers:

- [@flekschas](#)
- [@rgerum](#)

Submitted: 31 May 2023

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)).

## Summary

Data exploration, model building and pedagogy all benefit from the ability to interactively update elements in Matplotlib ([Hunter, 2007](#)) figures. `mpl-interactions` enables this by making it easy for users to create matplotlib figures in which the displayed data can be dynamically controlled through widgets. These widgets can be automatically generated by passing arguments such as arrays or shorthands (such as a tuple of numbers to generate a slider) to modified pyplot functions. After creation of these widgets, `mpl-interactions` updates plot elements without further user intervention. For ease of use, it adds these features while otherwise staying close to the `matplotlib.pyplot` interface. `mpl-interactions` is built such that parameters controlled by the generated widgets are easy to re-use for multiple plot elements, while not interfering with static elements. This design allows for building any figure that `matplotlib` can produce, while adding interactivity to specific parts as desired.

Complete tutorials, examples, and API documentation are available on <https://mpl-interactions.readthedocs.io/en/stable/>.

## Statement of Need

The ability to interact dynamically with plots through widgets such as sliders can be a powerful tool in the scientific process and in pedagogy. For instance, varying a parameter of a mathematical model plotted on top of data helps to understand the relationship between the model and the data. Similarly, exploratory data analysis can be enhanced by interactively modifying aspects of the plot such as which points are displayed, or the threshold level of a displayed image. `mpl-interactions`' core goal is to make this aspect of interactive plotting easier when using Matplotlib. Other interactive functionalities are out of scope as they are provided by Matplotlib (e.g. zooming and panning), or by other third party packages (e.g. point selection).

Matplotlib provides mechanisms for updating elements (artists) in figures. However, the APIs for these artists are not consistent and some are under- or undocumented. Furthermore, the creation and positioning of the native Matplotlib widgets is nontrivial. While the `ipywidgets` ([community, 2015](#)) library makes widget creation and positioning easier, it is difficult to integrate with Matplotlib in a performant manner. The easiest way to do so is to use the `ipywidgets`' `interact()` function, which automatically generates sliders and other widgets to control arguments to arbitrary python functions. However, this can result in completely regenerating the figure which can be slow. Alternatively, the user needs to remember the specifics of how to update each individual artist. While `matplotlib` and `ipywidgets` provide the tools for controlling plots with widgets, the overhead of implementing such control can overwhelm its utility. `mpl-interactions` fills this gap by making it easy for users to generate widgets that dynamically control plots.

There are a wide range of data visualization tools for Python, such as Altair (VanderPlas et al., 2018), Holoviz (Rudiger et al., 2020), and Plotly (Inc., 2015), which provide rich interactive plotting experiences. These tools often have overlapping functionality with `mpl-interactions` and in some cases provide a greater range of interactive capabilities. However, they may not be useful for a user already invested in using Matplotlib, or for a user for whom Matplotlib is otherwise the best solution. For such users `mpl-interactions` adds functionality to Matplotlib. To this end `mpl-interactions` closely follows the semantics of the Matplotlib API, rather than creating a separate set of semantics, like the other mentioned libraries. Thus it enhances an analysis workflow that uses Matplotlib by enabling users to add interactive features to a library they are already using, rather than using different libraries for different aspects of the data analysis process.

## Overview

`mpl-interactions` provides several key features to make generating interactive figures simple. The first is what arguments are accepted. While `matplotlib` requires users to pass arrays as arguments, `mpl-interactions` allows passing a function that returns numeric values. Parameters to these functions are specified by adding extra keyword arguments (kwargs) to the plotting function call. Then `mpl-interactions` will generate the appropriate widgets for the parameters and run the functions to generate the numerical data to plot. For example, to plot a sinusoid and control its amplitude and frequency using sliders, a function returning the `y` values is defined and passed as the `y` parameter to the plot function. The ranges of the `A` and `f` parameters are defined as extra keyword arguments using tuples as a shorthand for what widget to generate.


```
import mpl_interactions.pyplot as iplt
import matplotlib.pyplot as plt
import numpy as np

fig, ax = plt.subplots()

def sinusoid(x, A, f):
    return A*np.sin(x * f)

x = np.linspace(0, np.pi, 100)

ctrls = iplt.plot(x, sinusoid, A=(1, 10), f = (.5, 2))
plt.show()
```

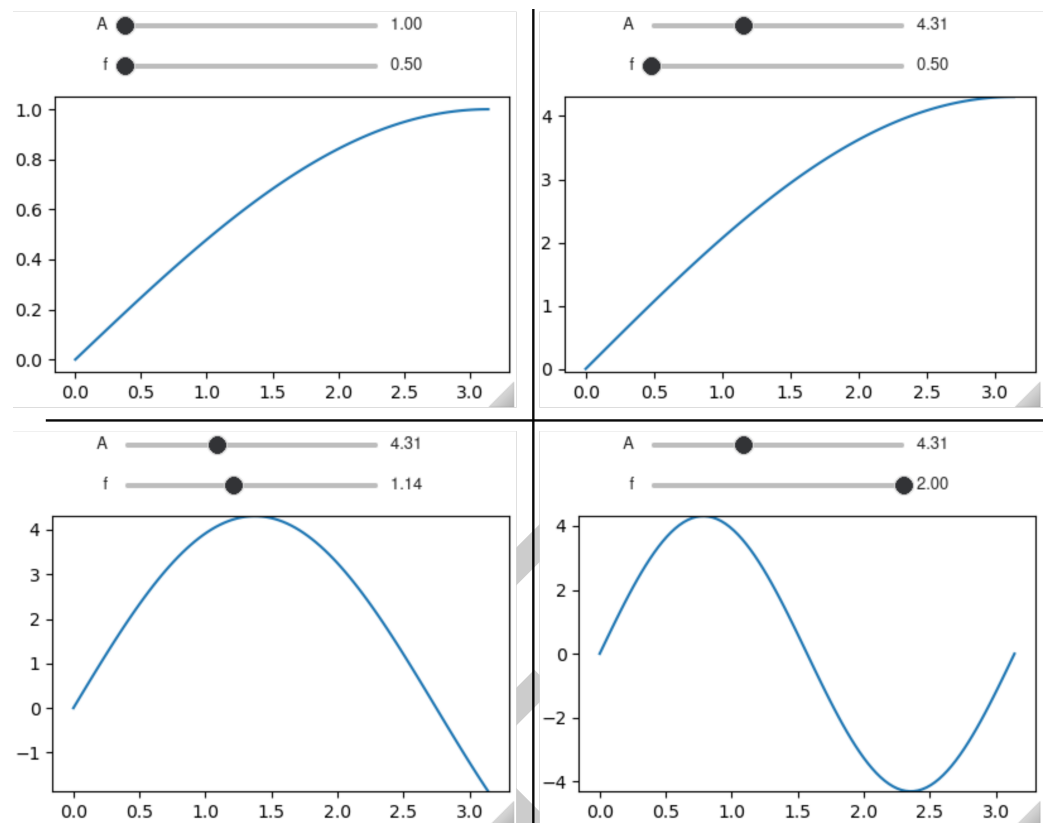

**Figure 1:** Multiple states of the figure resulting from moving the sliders after running above example in jupyter lab.

64 A second important feature of `mpl-interactions` is that interactive plot components are not  
65 isolated from each other. That is, the control widgets generated from one plotting call can  
66 be re-used to control other components. In addition to showing the re-use of control widgets  
67 this example demonstrates how `matplotlib` styling arguments (such as `vmin`) can be controlled  
68 through widgets.


```
N = 128
rng = np.random.default_rng(seed=1995)
im = rng.normal(size=(N,N))

fig, axs = plt.subplots(1, 2, figsize=(12, 5))

# create interactive controls
ctrls = iplt.imshow(im, vmin_vmax=("r", im.min(), im.max()), ax=axs[0])

# plot histogram of pixel intensities

# by indexing the ctrls object it is possible to
# re-use the the vmin and vmax created by imshow
# to control the position of the axvlines
iplt.axvline(ctrls["vmin"], ax=axs[1], c="k")
iplt.axvline(ctrls["vmax"], ax=axs[1], c="k");
axs[1].hist(im.flatten(), bins="auto")
axs[1].set_title("Histogram of Pixel Intensities")
```

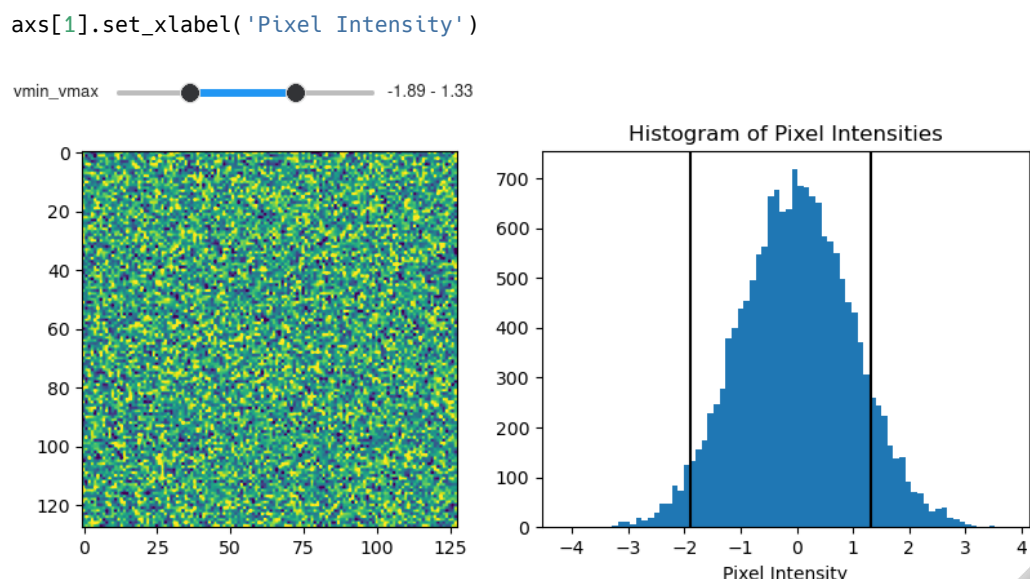

**Figure 2:** An imshow where the thresholds of the colorbar are controlled by the `vmin_vmax` range slider. While the slider is created by the `imshow` call, its interactive parameters can be reused to control the position of the vertical lines on the histogram.

69 Finally, `mpl-interactions` allows the reuse of Python functions performing mathematical  
70 operations in multiple parts of user code, rather than requiring users to write a plotting specific  
71 version. For example, below the `logistic_growth` function is used for both curve fitting and  
72 an interactive display in order to better understand the role of the model parameters.

```
%matplotlib ipympl
import matplotlib.pyplot as plt
import numpy as np
from scipy.optimize import curve_fit

import mpl_interactions.pyplot as iplt

def logistic_growth(t, L, k, t0):
    return L / (1 + np.exp(-k * (t - t0)))

# create a synthetic dataset of logistic growth
rng = np.random.default_rng(seed=1995)
t_data = np.sort(rng.uniform(0, 10, size=50))
y_data = logistic_growth(
    t_data, L=5, k=1, t0=1) + rng.normal(size=t_data.size, scale=0.1
)

# You can use the `logistic_growth` function to curve_fit
popt, pcov = curve_fit(logistic_growth, t_data, y_data)


# Now you can directly the same function to make
# an interactive plot to better understand its parameters
fig, axs = plt.subplots(1, 2, sharey=True)
```

```

axs[0].plot(t_data, y_data, "o")
axs[0].plot(t_data, logistic_growth(t_data, *popt))
axs[0].set_title("Data + Fit")
axs[1].set_title("Interactive Exploration")

ctrls = iplt.plot(
    np.linspace(0, 10),
    logistic_growth,
    L=(0.5, 10),
    k=(0.1, 1),
    t0=(0, 2.5),
    ax=axs[1],
    label="interactive",
)
axs[1].plot(t_data, logistic_growth(t_data, *popt), "--", label="fit")
plt.legend()

```

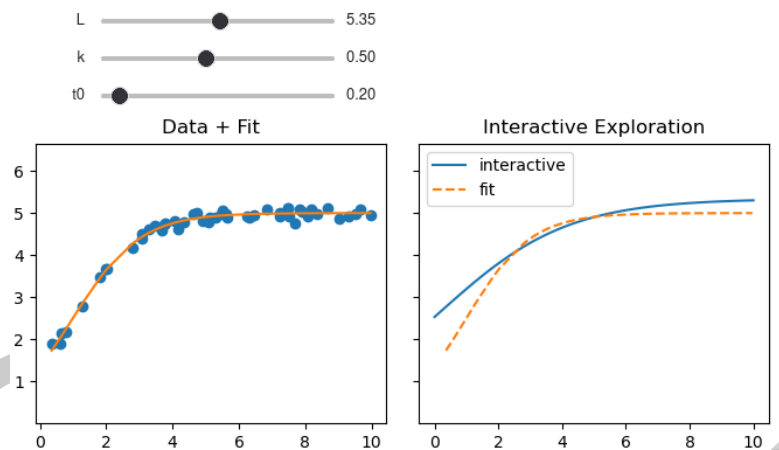

**Figure 3:** Generated figure and sliders after running above example in jupyter lab.

73 This framework makes it easy to generate complex interactive visualizations. It also enables  
74 mpl-interactions to manage generating GIFs. Any parameter controlled through mpl-  
75 interactions can be used to automatically generate a gif of the plot changing as a function  
76 of that parameter ([Animation Documentation](#)). Thus mpl-interactions can assist across the  
77 data visualization process, from initial exploration to the creation of a final animated plot as a  
78 GIF.

## 79 Acknowledgements

80 This work was supported by a National Defense Science and Engineering Graduate Fellowship  
81 (FA9550-19-F-0008, to IHI), the George W. Merck Fund of the New York Community Trust  
82 (award 338034, to DRH), and funds from Harvard University.

83 We thank Dr. K. Dalton from stimulating discussion, and Easun Arunachalam for feedback  
84 on drafts of this paper. In addition, many users have contributed features and bug fixes.  
85 Of particular note are Remco de Boer, and Samantha Hamilton who made contributions to  
86 documentation and code, and documentation respectively. A full list of coding contributors  
87 can be found here: <https://github.com/mpl-extensions/mpl-interactions/graphs/contributors>

88 Finally, many users have contributed in ways other than coding. For example by rais-  
89 ing issues either with the package or documentation. These users are recognized here:

90 <https://github.com/mpl-extensions/mpl-interactions#contributors->

## 91 References

92 community, J. widgets. (2015). *Ipywidgets, a GitHub repository*.

93 Hunter, J. D. (2007). Matplotlib: A 2D graphics environment. *Computing in Science &*  
94 *Engineering*, 9(3), 90–95. <https://doi.org/10.1109/MCSE.2007.55>

95 Inc., P. T. (2015). *Collaborative data science*. Plotly Technologies Inc. <https://plot.ly>

96 Rudiger, P., Signell, J., Bednar, J. A., Andrew, Stevens, J.-L., B, C., Samuels, J., Todd,  
97 PEDOT, T., Oord, S. van den, Mease, J., Virshup, I., Corona, G., Hermes, D., H.,  
98 C., & Graser, A. (2020). *Holoviz/hvplot: Version 0.5.2* (Version v0.5.2). Zenodo.  
99 <https://doi.org/10.5281/zenodo.3634720>

100 VanderPlas, J., Granger, B. E., Heer, J., Moritz, D., Wongsuphasawat, K., Satyanarayan,  
101 A., Lees, E., Timofeev, I., Welsh, B., & Sievert, S. (2018). Altair: Interactive statistical  
102 visualizations for python. *Journal of Open Source Software*, 3(32), 1057. <https://doi.org/10.21105/joss.01057>  
103

DRAFT