



```
# ubuntu desktop
sudo apt update
sudo apt install bind9 bind9utils dnsutils -y
sudo nano /etc/bind/named.conf.local
```

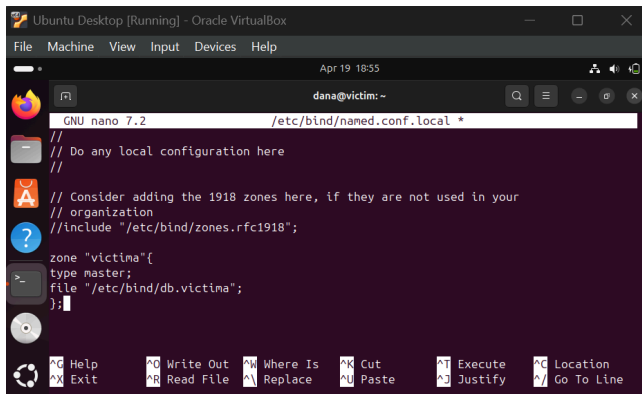

```
GNU nano 7.2 /etc/bind/named.conf.local *
//
// Do any local configuration here
//
// Consider adding the 1918 zones here, if they are not used in your
// organization
//include "/etc/bind/zones.rfc1918";
zone "victima" {
    type master;
    file "/etc/bind/db.victima";
};
```


```
sudo cp /etc/bind/db.local /etc/bind/db.victima
sudo nano /etc/bind/db.victima
```

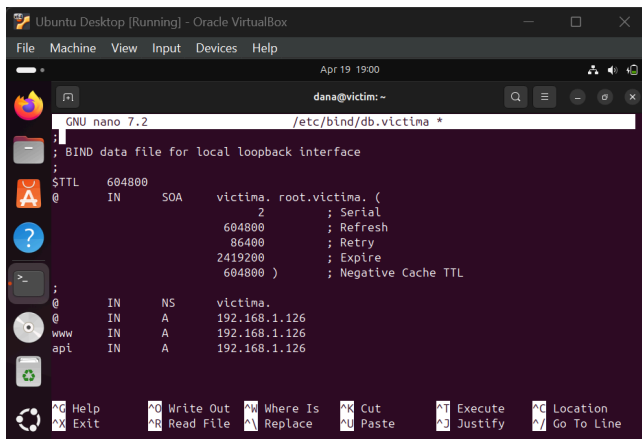

```
GNU nano 7.2 /etc/bind/db.victima *
; BIND data file for local loopback interface
$TTL 604800
@ IN SOA victima. root.victima. (
    2 ; Serial
    604800 ; Refresh
    86400 ; Retry
    2419200 ; Expire
    604800 ) ; Negative Cache TTL
;
@ IN NS victima.
@ IN A 192.168.1.126
www IN A 192.168.1.126
api IN A 192.168.1.126
```

```
sudo named-checkzone victima /etc/bind/db.victima
sudo named-checkconf
sudo systemctl restart bind9
sudo systemctl enable named
sudo systemctl status named

#kali
sudo nano /etc/systemd/resolved.conf
```

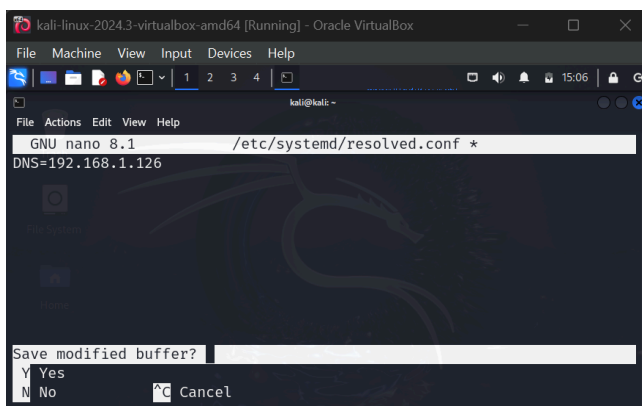

```
kali-linux-2024.3-virtualbox-amd64 [Running] - Oracle VirtualBox
File Machine View Input Devices Help
GNU nano 8.1 /etc/systemd/resolved.conf *
DNS=192.168.1.126
Save modified buffer?
Y Yes
N No Cancel
```

```
nmcli connection show
```

```
(kali㉿kali)-[~]  
$ nmcli connection show  
NAME                UUID                                  TYPE      DE>  
Wired connection 1  002121d4-94f6-39a9-9d8d-17bd0e0d5c03  ethernet  et>  
lo                  f67fe91f-ebf0-4c26-9a9f-d43647e2c635  loopback  lo>
```

```
sudo nmcli connection modify "Wired connection 1" ipv4.dns "192.168.1.126"  
sudo nmcli connection modify "Wired connection 1" ipv4.ignore-auto-dns yes  
sudo nmcli connection up "Wired connection 1"  
ping victima
```

```
(kali㉿kali)-[~]  
$ ping victima  
PING victima (192.168.1.126) 56(84) bytes of data.
```