

Complete Guide to Shodan

Collect. Analyze. Visualize. Make Internet Intelligence Work For You.

Complete Guide to Shodan

Collect. Analyze. Visualize. Make Internet Intelligence Work for You.

John Matherly

This book is for sale at http://leanpub.com/shodan

This version was published on 2016-02-25



* * * * *

This is a <u>Leanpub</u> book. Leanpub empowers authors and publishers with the Lean Publishing process. <u>Lean Publishing</u> is the act of publishing an in-progress ebook using lightweight tools and many iterations to get reader feedback, pivot until you have the right book and build traction once you do.

* * * * *

© 2015 - 2016 Shodan, LLC

Table of Contents

T			- 1			•		
In	ITI	rn	C	П	C1	П	N	n

All About the Data

SSL In Depth

Data Collection

Web Interfaces

Search Query Explained

Introducing Filters

Shodan Search Engine

Shodan Maps

Shodan Exploits

Shodan Images

Exercises: Website

External Tools

Shodan Command-Line Interface

Maltego Add-On

Browser Plug-Ins

Exercises: Command-Line Interface

Developer API

Usage Limits

Introducing Facets

Getting Started

Initialization

Search

Host Lookup

Scanning

Real-Time Stream

Network Alert

Example: Public MongoDB Data

Exercises: Shodan API

Industrial Control Systems

Common Abbreviations

Protocols

Securing Internet-Connected ICS

Use Cases

Appendix A: Banner Specification

General Properties

HTTP(S) Properties

Location Properties

h@ckermuxam.edu.vn5 **SSL Properties Special Properties Example Appendix B: List of Search Filters General Filters NTP Filters SSL Filters Telnet Filters Appendix C: Search Facets General Facets NTP Facets SSH Facets SSL Facets Telnet Facets** Appendix D: List of Ports Appendix E: Sample SSL Banner **Exercise Solutions Website Command-Line Interface**

Shodan API

Introduction

Shodan is a search engine for Internet-connected devices. Web search engines, such as Google and Bing, are great for finding websites. But what if you're interested in finding computers running a certain piece of software (such as Apache)? Or if you want to know which version of Microsoft IIS is the most popular? Or you want to see how many anonymous FTP servers there are? Maybe a new vulnerability came out and you want to see how many hosts it could infect? Traditional web search engines don't let you answer those questions.

All About the Data

Banner

The basic unit of data that Shodan gathers is the **banner**. The banner is textual information that describes a service on a device. For web servers this would be the headers that are returned or for Telnet it would be the login screen.

The content of the banner varies greatly depending on the type of service. For example, here is a typical HTTP banner:

```
HTTP/1.1 200 OK
Server: nginx/1.1.19
Date: Sat, 03 Oct 2015 06:09:24 GMT
Content-Type: text/html; charset=utf-8
Content-Length: 6466
Connection: keep-alive
```

The above banner shows that the device is running the **nginx** web server software with a version of **1.1.19**. To show how different the banners can look like, here is a banner for the Siemens S7 industrial control system protocol:

```
Copyright: Original Siemens Equipment
PLC name: S7_Turbine
Module type: CPU 313C
Unknown (129): Boot Loader A
Module: 6ES7 313-5BG04-0AB0 v.0.3
Basic Firmware: v.3.3.8
Module name: CPU 313C
Serial number of module: S Q-D9U083642013
Plant identification:
Basic Hardware: 6ES7 313-5BG04-0AB0 v.0.3
```

The Siemens S7 protocol returns a completely different banner, this time providing information about the firmware, its serial number and a lot of detailed data to describe the device.

You have to decide what type of service you're interested in when searching in Shodan because the banners vary greatly.

Note: Shodan lets you search for banners - not hosts. This means that if a single IP exposes many services they would be represented as separate results.

Device Metadata

In addition to the banner, Shodan also grabs meta-data about the device such as its geographic location, hostname, operating system and more (see Appendix A). Most of the meta-data is searchable via the main Shodan website, however a few fields are only available to users of the developer API.

IPv6

As of October 2015, Shodan gathers millions of banners per month for devices accessible on IPv6. Those numbers still pale in comparison to the hundreds of millions of banners gathered for IPv4 but it is expected to grow over the coming years.

SSL In Depth

SSL is becoming an evermore important aspect of serving and consuming content on the Internet, so it's only fit that Shodan extends the information that it gathers for every SSL-capable service. The banners for SSL services, such as HTTPS, include not just the SSL certificate but also much more. All the collected SSL information discussed below is stored in the **ssl** property on the banner (see Appendix A and Appendix E).

Vulnerability Testing

Heartbleed

If the service is vulnerable to Heartbleed then the banner contains 2 additional properties.

opts.heartbleed contains the raw response from running the Heartbleed test against the service. Note that for the test the crawlers only grab a small overflow to confirm the service is affected by Heartbleed but it doesn't grab enough data to leak private keys. The crawlers also added CVE-2014-0160 to the opts.vulns list if the device is vulnerabel. However, if the device is not vulnerable then it adds "!CVE-2014-0160". If an entry in opts.vulns is prefixed with a ! or - then the service is not vulnerable to the given CVE.

```
{
    "opts": {
        "heartbleed": "... 174.142.92.126:8443 - VULNERABLE\n",
        "vulns": ["CVE-2014-0160"]
    }
}
```

Shodan also supports searching by the vulnerability information. For example, to search Shodan for devices in the USA that are affected by Heartbleed use:

```
country:US vuln:CVE-2014-0160
```

FREAK

If the service supports EXPORT ciphers then the crawlers add the "CVE-2015-0204" item to the **opts.vulns** property:

Logjam

The crawlers try to connect to the SSL service using ephemeral Diffie-Hellman ciphers and if the connection succeeds the following information is stored:

```
"dhparams": {
    "prime": "bbbc2dcad84674907c43fcf580e9...",
    "public_key": "49858e1f32aefe4af39b28f51c...",
    "bits": 1024,
    "generator": 2,
    "fingerprint": "nginx/Hardcoded 1024-bit prime"
}
```

Version

Normally, when a browser connects to an SSL service it will negotiate the SSL version and cipher that should be used with the server. They will then agree on a certain SSL version, such as TLSv1.2, and then use that for the communication.

Shodan crawlers start out the SSL testing by doing a normal request as outlined above where they negotiate with the server. However, afterwards they also explicitly try connecting to the server using a specific SSL version. In other words, the crawlers attempt to connect to the server using SSLv2, SSLV3, TLSv1.0, TLSv1.1 and TLSv1.2 explicitly to determine all the versions that the SSL service supports. The gathered information is made available in the **ssl.versions** field:

```
{
    "ssl": {
        "versions": ["TLSv1", "SSLv3", "-SSLv2", "-TLSv1.1", "-TLSv1.2"]
    }
}
```

If the version has a - (dash) in front of the version, then the device does not support that SSL version. If the version doesn't begin with a -, then the service supports the given SSL version. For example, the above server supports:

TLSv1 SSLv3

And it denies versions:

SSLv2 TLSv1.1 TLSv1.2

The version information can also be searched over the website/ API. For example, the following search query would return all SSL services (HTTPS, POP3 with SSL, etc.) that allow connections using SSLv2:

```
ssl.version:sslv2
```

Follow the Chain

The certificate chain is the list of SSL certificates from the root to the end-user. The banner for SSL services includes a **ssl.chain** property that includes all of the SSL certificates of the chain in PEM-serialized certificates.

Data Collection

Frequency

The Shodan crawlers work 24/7 and update the database in real-time. At any moment you query the Shodan website you're getting the latest picture of the Internet.

Distributed

Crawlers are present in countries around the world, including:

• USA (East and West Coast)

- China
- Iceland
- France
- Taiwan
- Vietnam
- Romania
- Czech Republic

Data is collected from around the world to prevent geographic bias. For example, many system administrators in the USA block entire Chinese IP ranges. Distributing Shodan crawlers around the world ensures that any sort of country-wide blocking won't affect data gathering.

Randomized

The basic algorithm for the crawlers is:

- 1. Generate a random IPv4 address
- 2. Generate a random port to test from the list of ports that Shodan understands
- 3. Check the random IPv4 address on the random port and grab a banner
- 4. Goto 1

This means that the crawlers don't scan incremental network ranges. The crawling is performed completely random to ensure a uniform coverage of the Internet and prevent bias in the data at any given time.

Web Interfaces

The easiest way to access the data that Shodan gathers is through the web interfaces. Almost all of them let you enter a search query, so lets discuss that first:

Search Query Explained

By default, the search query only looks at the main banner text and doesn't search the meta-data. For example, if you're searching for "Google" then the results will only include results where the text "Google" was shown in the banner; it wouldn't necessarily return results for Google's network range.

302 Found

207.35.242.72

Bell Canada

Added on 2015-10-04 22:27:16 GMT

Canada Details

HTTP/1.1 302 Moved Temporarily

Date: Sun, 04 Oct 2015 22:27:08 GMT

Server: Google Search Appliance

Content-Type: text/html

Location: /EnterpriseController

Expires: Sun, 04 Oct 2015 22:27:08 GMT Cache-Control: private, max-age=0

X-Content-Type-Options: nosniff X-Frame-Options: SAMEORIGIN

Shodan search for "Google"

As seen above, a search for "Google" returns a lot of Google Search Appliances that organizations have purchased and connected to the Internet; it doesn't return Google's servers.

Shodan will try to find results matching **all search terms**, which means that implicitly there is a + or **AND** between each search term. For example, the search queries "apache + 1.3" is equivalent to "apache 1.3".

To search the meta-data you need to use **search filters**.

Introducing Filters

Filters are special keywords that Shodan uses to let you narrow search results based on the meta-data of a service or device. The format for entering filters is:

filtername:value

Important: There is no space between the colon ":" and the value.

To use a value that contains a space with a filter you have to wrap the value in double quotes. For example, to find all devices on the Internet that are located in San Diego you would search for:

city:"San Diego"

A few filters let you specify several values that are separated by a comma ",". For example, to find devices that are running Telnet on ports 23 and 1023:

port:23,1023

If a filter doesn't allow commas in its value (ex. **port**, **hostname**, **net**) then it lets you provide multiple values. Filters can also be used to exclude results by prepending a minus sign "-" to the filter. For example, the following would return all devices that **aren't** located in San Diego:

-city:"San Diego"

Shodan supports a lot of filters, a few popular ones are:

Filter Name	Description	Example		
category	Available categories: ics, malware			
city	Name of the city			
country	Full country name			
net	Only show results inside the provided IP range in CIDR format	net:190.30.40.0/24		
org	Narrow results based on the organization that owns the IP	org:"Verizon Wireless"		

See Appendix B for a full list of search filters that are available.

Shodan Search Engine

The main interface for accessing the data gathered by Shodan is via its search engine located at https://www.shodan.io



Analyze the Internet in Seconds


Search the Internet for devices with Shodan and use the web interface to quickly generate beautiful reports.

By default, the search query will look at the data collected within the past 30 days. This is a change from the old website at shodanhq.com, which searched the entire Shodan database by default. This means that the results you get from the website are recent and provide an accurate view of the Internet at the moment.

In addition to searching, the website also provides the following functionality:

Download Data

After completing a search there will be a button at the top called **Download Data**. Clicking on that button will provide you with the option of downloading the search results in **JSON**, **CSV** or **XML** formats.

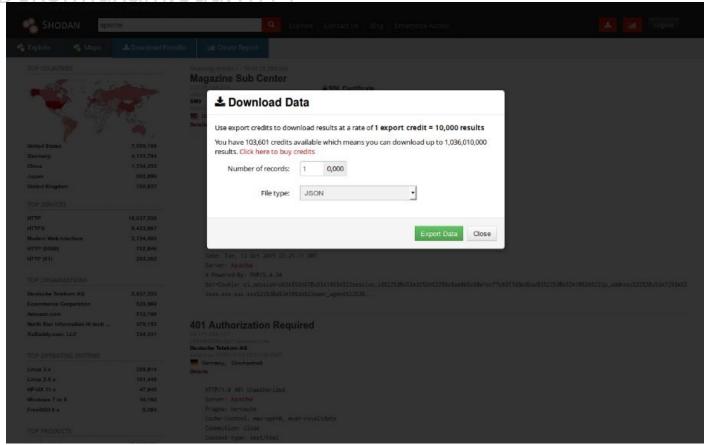

The **JSON** format generates a file where each line contains the full banner and all accompanying meta-data that Shodan gathers. This is the preferred format as it saves all available information. And the format is compatible with the Shodan command-line client, meaning you can download data from the Shodan website then process it further using the terminal.

The **CSV** format returns a file containing the IP, port, banner, organization and hostnames for the banner. It doesn't contain all the information that Shodan gathers due to limitations in the CSV file format. Use this if you only care about the basic information of the results and want to quickly load it into external tools such as Excel.

The **XML** format is the old, deprecated way of saving search results. It is harder to work with than JSON and consumes more space, thereby making it suboptimal for most situations.

Downloading data consumes **export credits**, which are one-time use and purchased on the website. They aren't associated in any way with the Shodan API and they don't automatically renew every month. 1 export credit can be used to download up to 10,000 results.

Data files generated by the website can be retrieved in the Downloads section of the website, which you can visit by clicking on the button in the upper right corner.

Generate Report

The website lets you generate a report based off of a search query. The report contains graphs/ charts providing you a big picture view of how the results are distributed across

the Internet. This feature is free and available to anyone.




When you generate a report you are asking Shodan to take a snapshot of the search results and provide an aggregate overview. Once the report has been generated, it doesn't change or automatically update as new data is being collected by Shodan. This also means that you can generate a report once a month and keep track of changes over time by comparing

it to reports of previous months. By clicking on the button in the top right corner you can get a listing of previously generated reports.

Shared Search Queries

Finding specific devices requires knowledge about the software they run and how they respond to banner grabs over the Internet. Fortunately, it is possible to leverage the shared knowledge of the community using the search directory on Shodan. People are able to readily describe, tag and share their search queries for others to use. If you're interested in getting started with Shodan, the shared searches should be your first stop.

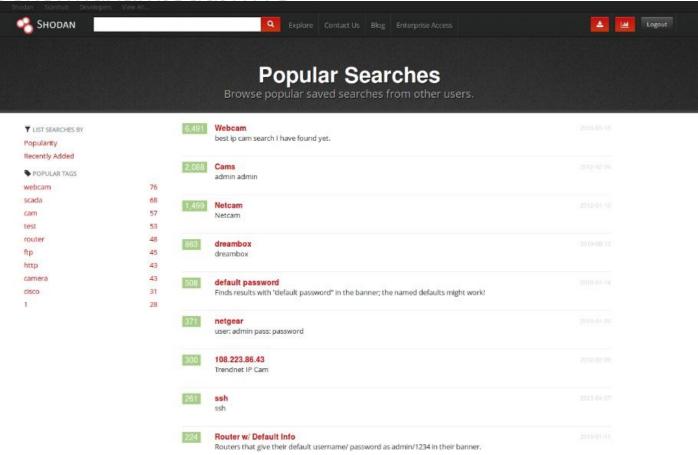

Warning: Shared search queries are publicly viewable. Do not share queries that are sensitive or you don't want others to know about.

Example: Finding Non-Default Services

A common reaction I get when talking about devices exposed on the Internet is something like the following:



And this is why my server is whitelisted, password protected and not on port 25565. I don't like data miners...

Specifically, the idea that running the service (in this case Minecraft) on a non-standard port is a good way to stay hidden. In security circles this is also known as the concept of security by obscurity, and it's considered a largely ineffective, deprecated idea. What's worse is that it might give you the owner of the server/ device a false sense of security. For example, lets take a look at people running OpenSSH on a non-standard port. To do this we will use the following search query:

```
product:openssh -port:22
```

The **product** filter is used to only show OpenSSH servers while **-port:22** tells Shodan to exclude all results that were collected from the standard SSH port (22). To get a better overview of the search results lets generate a report:



Top Countries	
1. United States	139,969
2. Australia	59,493
3. Germany	24,584
4. Brazil	24,405
5. China	15,123
6. France	14,708
7. Russian Federation	11,065
8. United Kingdom	10,692
9. Poland	8,496
10. Canada	7,484

The report also gives us a breakdown of the most common non-standard ports:

1. 2222: 323,930

2. **5000**: 47,439

3. **23**: 13,482

4. **26**: 7,569

5. **5555**: 6,856

6. **9999**: 6,286

7. **82**: 6,046

8. **2323**: 3,622

9. **6666**: 2,735

10. 3333: 2,644

These numbers don't look that random to me... Right away you should realize that your random choice of non-standard port might not be so unique. Port 2222 is popular the same way that HTTP on port 8080 is popular, and it's also the default port for the Kippo honeypot though I doubt that many people are running honeypots. The next most popular port is 5000, which didn't follow the same pattern as the other ports to me (repeating/symmetric numbers). And it was around the same time that I realized that Australia was the 2nd most popular country to run OpenSSH on a non-standard port. I decided to take a closer look at Australia, and it turns out that there are nearly the same amount of servers running OpenSSH on port 5000 as they are on the default port 22. About 68,000 devices are running on the default port, and 54,000 on port 5000. Looking at a few banners we can determine that this is the SSH fingerprint that they all share:

5b:a2:5a:9a:91:28:60:9c:92:2b:9e:bb:7f:7c:2e:06

It appears that the Australian ISP BigPond installs/ configures networking gear that not only runs OpenSSH on port 5000 (most likely for remote management) but also has the same SSH keys installed on all of them. The devices also happen to run an old version of OpenSSH that was released on September 4th 2007. There's no guarantee that running OpenSSH on the default port would've made them more security conscious, but their installation of ~54,000 devices is 25% of the total number of OpenSSH servers on the Internet running version 4.7 (sidenote: the most popular version of OpenSSH is 5.3).

Shodan Maps

<u>Shodan Maps</u> provides a way to explore search results visually instead of the text-based main website. It displays up to 1,000 results at a time and as you zoom in/ out Maps adjusts the search query to only show results for the area you're looking at.

All search filters that work for the main Shodan website also work on Maps.

Map Styles

There are a variety of map styles available to present the data to your preference. Click on the gear button next to the search button for a list of options.

Satellite



Satellite without Labels



Streets (Light)




Streets (Dark)




Streets (Green)



Streets (Red)

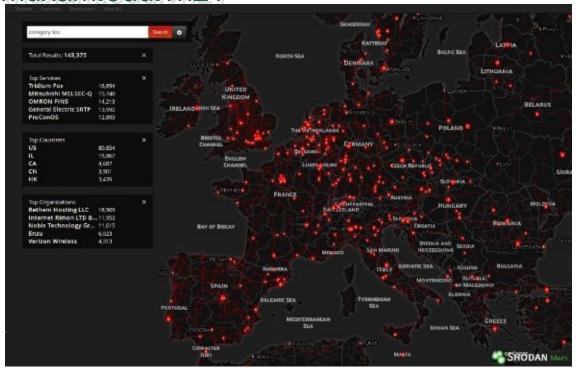

Pirate

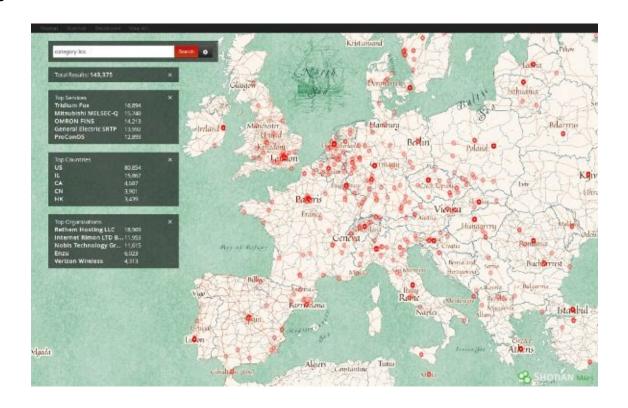

Shodan Exploits

<u>Shodan Exploits</u> collects vulnerabilities and exploits from CVE, Exploit DB and Metasploit to make it searchable via web interface.



The search filters available for Exploits are different than the rest of Shodan, though an attempt was made to keep them similar when possible.


Important: By default, Exploits will search the entire content of the available exploit information including meta-data. This is unlike Shodan, which only searches the banner text if no other filters are specified.

The following search filters are available:

Name	Description	
author	Author of the vulnerability/ exploit	
description	Description	
platform	Platform that it targets (ex: php, windows, linux)	
type	Exploit type (ex: remote, dos)	

Shodan Images

For a quick way to browse all the screenshots that Shodan collects check out <u>Shodan Images</u>. It is a user-friendly interface around the **has_screenshot** filter.

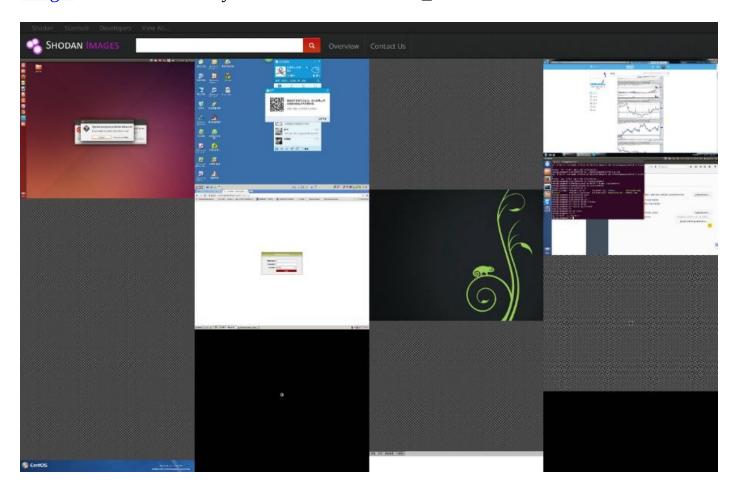

The search box at the top uses the same syntax as the main Shodan search engine. It is most useful to use the search box to filter by organization or netblock. However, it can also be used to filter the types of images that are shown.

Image data is gathered from 4 different sources:

- VNC
- RTSP
- Webcams
- X Windows

Each image source comes from a different port/ service and therefor has a different banner. This means that if you only want to see images from webcams you could <u>search</u> for:

HTTP

To search for VNC you can search using **authentication disabled** and for RTSP you simply search with **RTSP**.

The images can also be found using the main Shodan website or Shodan Maps by using the **has_screenshot:true** filter in the search query. For example, to find images of VNC

h@ckermuxam.edu.vn24 servers that have disabled authentication search for has_screenshot:true.authentication disabled.

Exercises: Website

Exercise 1

Find the 4SICS website using Shodan.

Tip: Check out Appendix B for a list of search filters.

Exercise 2

Find the Rastalvskarn powerplant.

Tip: It is running anonymous VNC and is located in the Swedish city of Nora

Exercise 3

How many IPs in Sweden are vulnerable to Heartbleed and still support SSLv2?

How many IPs are vulnerable to Heartbleed at your organization?

Exercise 4

Find all the industrial control systems in your town.

Exercise 5

Which RAT is most popular in Sweden?

External Tools

Shodan Command-Line Interface

Getting Started

The **shodan** command-line interface is packaged with the official Python library for Shodan, which means if you're running the latest version of the library you already have access to the CLI. To install the new tool simply execute:

```
easy_install shodan
```

Once the tool is installed it has to be initialized with your API key:

```
shodan init YOUR_API_KEY
```

Visit https://account.shodan.io to retrieve the API key for your account.

alert

The **alert** command provides you the ability to **list**, **clear** and **remove** network alerts that were created using the API.

convert

Convert the compressed JSON file generated by Shodan into a different file format. At the moment it only supports output to **kml**.

count

Returns the number of results for a search query.

```
$ shodan count microsoft iis 6.0 5360594
```

download

Search Shodan and download the results into a file where each line is a JSON banner (see Appendix A).

By default it will only download 1,000 results, if you want to download more look at the --limit flag.

The download command is what you should be using most often when getting results from Shodan since it lets you save the results and process them afterwards using the parse command. Because paging through results uses query credits, it makes sense to always store searches that you're doing so you won't need to use query credits for a search you already did in the past.

host

See information about the host such as where it's located, what ports are open and which organization owns the IP.

\$ shodan host 189.201.128.250

```
189.201.128.250
                         customer-250.xertix.com
Hostnames:
City:
                         Mexico
Country:
                         Mexico
Organization:
                         Metro Net, S.A.P.I. de C.V.
Number of open ports:
Vulnerabilities:
Ports:
    443 Fortinet FortiGate 50B or FortiWifi 80C firewall http config
        |-- SSL Versions: SSLv3, TLSv1, TLSv1.1, TLSv1.2
        |-- Diffie-Hellman Parameters:
                Bits:
                Generator:
                               2
                Fingerprint: RFC2409/Oakley Group 2
```

info

Obtain general information about your API plan, including how many query and scan credits you have remaining this month.

```
$ shodan info
Query credits available: 5102
Scan credits available: 249
```

myip

Returns your Internet-facing IP address.

```
$ shodan myip
199.30.49.210
```

parse

Use parse to analyze a file that was generated using the download command. It lets you filter out the fields that you're interested in, convert the JSON to a CSV and is friendly for pipe-ing to other scripts.

The following command outputs the IP address, port and organization in CSV format for the previously downloaded Microsoft-IIS data:

```
216.28.245.171,80,Web Force Systems,
103.41.16.147,80,
218.244.142.211,80, China Network Information Center,
81.22.98.166,80, Kriter Internet Hiz.Ltd.Sti.,
75.149.30.138,443,Comcast Business Communications,
23.108.235.233,80, Nobis Technology Group, LLC,
207.57.69.157,8080, Verio Web Hosting,
66.129.113.13,80, Peak 10,
168.143.6.120,8080, Verio Web Hosting,
218.0.3.56,80,China Telecom Ningbo,
104.202.81.231,80,
98.191.178.20,443,Cox Communications,
108.186.164.90,80, Peg Tech,
23.105.63.236,80, Nobis Technology Group, LLC,
67.227.184.237,8443,Smash Data Design,
107.163.173.34,80,
185.22.198.84,80,Nexto SAS,
72.29.22.40,80,Cybercon,
216.119.84.188,80,CrystalTech Web Hosting,
104.221.145.60,80,
198.171.51.81,8080, Verio Web Hosting,
209.10.173.10,443,Quality Technology Services, N.J., LLC,
```

scan

The scan command provides a few sub-commands but the most important one is submit which lets you perform network scans using Shodan.

\$ shodan scan submit 202.69.165.20

```
achillean@demo:~$ shodan scan submit 202.69.165.20

Starting Shodan scan at 2015-07-24 04:14 (100000 scan credits left)

202.69.165.20
Country Philippines
City Pampanga
Organization ComClark Network & Technology Corp.

Open Ports:
80/tcp
443/tcp
902/tcp VMware Authentication Daemon (1.10)
```

search

This command lets you search Shodan and view the results in a terminal-friendly way. By default it will display the IP, port, hostnames and data. You can use the –fields parameter to print whichever banner fields you're interested in.

For example, to search Microsoft IIS 6.0 and print out their IP, port, organization and hostnames use the following command:

```
$ shodan search --fields ip_str,port,org,hostnames microsoft iis 6.0
```

```
81.171.175.68 80 Star Technology Services Limited
178.73.238.43 80 Portlane Networks AB
113.245.76.199 5900 China Telecom HUNAN
149.210.160.163 80 Transip B.V. nowarkrengelink.com
23.92.216.117 80 Res.pl Isp S.c. mailingrolout.com
190.78.179.228 8080 CANTV Servicios, Venezuela 190-78-179-228.dyn.dsl.cantv.net
192.3.4.108 443 ColoCrossing sxi.pw
160.246.182.223 80 Hayashi Telempu Co., Ltd.
198.104.15.120 443 Verio Web Hosting wholesalechildrensclothing.com.au
208.64.139.67 80 Desync Networks 119-a.webmasters.com
212.227.51.115 443 Internet AG s535322526.online.de
178.208.77.241 81 McHost.Ru v112059.yps.mcdir.ru
63.249.80.153 443 Cruzio www12153.cruzio.com
87.243.209.223 8080 HotChilli Internet static-87-243-209-223.adsl.hotchilli.net
183.89.74.87 81 38B Broadband mx-ll-183.89.74-67.dynamic.3bb.co.th
178.236.77.90 80 Excellent Hosting Sweden AB
54.201.193.170 80 Amazon.com ec2-54-201-193-170.us-west-2.compute.amazonaws.com
106.186.28.222 80 Linode, LLC li608-222.members.linode.com
208.131.128.136 80 WestHost greenstreetstudios.org
```

stats

The stats command lets you print the facets for a search query.

For example, the following command shows the most popular countries where Apache web servers are located in:

```
$ shodan stats --facets country apache
Top 10 Results for Facet: country
US
                                 8,336,729
DE
                                 4,512,172
CN
                                 1,470,434
JΡ
                                 1,093,699
GB
                                   832,221
                                   684,432
NL
                                   667,871
FR
CA
                                   501,630
RU
                                   324,698
BR
                                   266,788
```

stream

The stream command provides access to the real-time stream of data that the Shodan crawlers collect.

```
achillean@demo:~$ shodan stream --help
Usage: shodan stream [OPTIONS]
 Stream data in real-time.
Options:
  --color / --no-color
                        List of properties to output.
 --fields TEXT
                        The separator between the properties of the search
  --separator TEXT
                        results.
                        The number of results you want to download. -1 to
  --limit INTEGER
                        download all the data possible.
                        Save the stream data into the specified directory as
  --datadir TEXT
                        .json.gz files.
                        A comma-separated list of ports to grab data on.
  --ports TEXT
                        Disable the printing of information to the screen.
  --quiet
  --streamer TEXT
                        Specify a custom Shodan stream server to use for
                        grabbing data.
  -h, --help
                        Show this message and exit.
```

The command supports many different flags, however there are 2 that are important to mention:

-datadir

The **–datadir** flag lets you specify a directory in which the streamed data should be stored. The files generated in the **–datadir** directory have the following naming convention:

```
YYYY-MM-DD.json.gz
```

A sample file name would be "2016-01-15.json.gz". Each day a new file is automatically generated as long as you keep the stream running. For example, the following command downloads all the data from the real-time stream and saves it in a directory called /var/lib/shodan/:

```
shodan stream --datadir /var/lib/shodan/
```

-limit

The **—limit** flag specifies how many results that should be downloaded. By default, the stream command runs forever until you exit the tool. However, if you're only interested in collecting a sample of data then the **—limit** flag ensures you gather a small amount of records. For example:

```
shodan stream --limit 100
```

The above command would connect to the Shodan real-time stream, print out the first 100 records that are received and then exit.

-ports

The **–ports** flag accepts a comma-separated list of ports to let you stream only records gathered from those ports. The following command prints out a stream of banners that were collected from services running on port 80 or 8080:

```
shodan stream --ports 80,8080
```

Example: Telnet Research


Lets assume we want to perform research into devices on the Internet running Telnet. As a starting point we can combine all of the aforementioned commands into the following:

```
mkdir telnet-data
shodan stream --ports 23,1023,2323 --datadir telnet-data/ --limit 10000
```

First, we create a directory called **telnet-data** to store the Telnet data. Then we request 10,000 records (**–limit 10000**) from the stream on common Telnet ports (**–ports 23,1023,2323**) and store the results in the previously created directory (**–datadir telnet-data**/).

Maltego Add-On

Maltego is an open source intelligence and forensics application; it lets you visually explore and correlate data from a variety of sources.

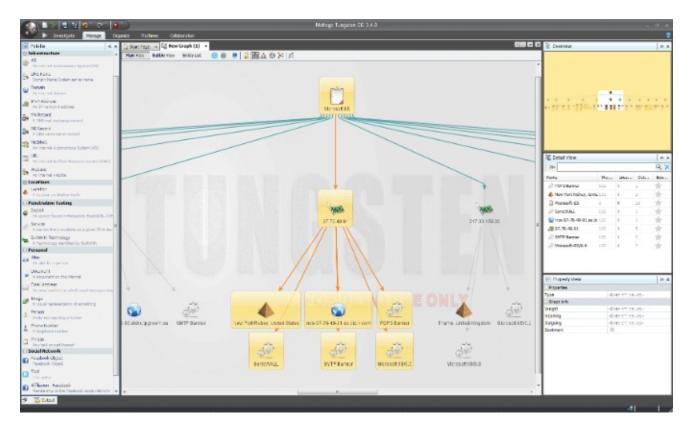

The Shodan add-on for Maltego provides 2 new entities (Service and Exploit) and 5 transforms:

- searchShodan
- searchShodanByDomain
- searchShodanByNetblock
- toShodanHost
- searchExploits

Browser Plug-Ins

There are plugins available for both <u>Chrome</u> and <u>Firefox</u> that let you see what services a website exposes.

Exercises: Command-Line Interface

Exercise 1

Download the IPs vulnerable to Heartbleed in Sweden and Norway using the Shodan CLI. Filter out the results for Sweden and store them in a separate file.

Note: Uncompress the file and look at the raw data to see the raw response from the Heartbleed test.

Exercise 2

Download 1,000 recent banners using the real-time stream and then map them using Google Maps.

Tip: shodan convert

Exercise 3

Write a script to download a list of known malware IPs and block any outgoing traffic to them.

Tip: iptables -A OUTPUT -d x.x.x.x -j DROP

Developer API

Shodan provides a developer API (https://developer.shdan.io/api) for programmatic access to the information that is collected. All of the websites and tools, including the main Shodan website, are powered by the API. Everything that can be done via the website can be accomplished from within your own code.

The API is divided into 2 parts: REST API and Streaming API. The REST API provides methods to search Shodan, look up hosts, get summary information on queries and a variety of utility methods to make developing easier. The Streaming API provides a raw, real-time feed of the data that Shodan is currently collecting. There are several feeds that can be subscribed to, but the data can't be searched or otherwise interacted with; it's a live feed of data meant for large-scale consumption of Shodan's information.

Note: Only users with an API subscription are able to access the Streaming API.

Usage Limits

There are 3 methods of the API that get limited depending on your API plan:

- 1. **Searching** To limit the number of searches that can be performed per month Shodan uses **query credits**. 1 query credits is used when you **perform a search containing filters** or **go past the 1st page**. For example, if you search for "apache" that doesn't ue any query credits. If you search for "apache country:US" that would use 1 query credit. Likewise, if you searched for the 2nd page of results for "apache" that would use 1 query credit. Finally, a search query for the 2nd page of "apache country:US" would also use up 1 query credit.
- 2. **Scanning** The on-demand scanning API uses **scan credits** to limit the number of hosts that you can request Shodan to scan every month. For every host that you request a scan of Shodan deducts 1 scan credit.
- 3. **Network Alerts** The number of IPs that can be monitored using alerts is limited based on your API subscription. Only paid customers have access to this feature. And you can't create more than 100 alerts on your account.

Important: Query and scan credits get reset at the start of every month.

Introducing Facets

Facets provide aggregate information about a specific field of the banner you're interested in. Filters let you narrow down search results while facets let you get a *big picture* view of the results. For example, the main Shodan website uses facets to provide the statistics information on the left side of the search results:

430,835
139,912
111,143
101,453
84,542
59,590
33,674
27,988
27,682
19,095

A long list of facets are available (see **Appendix C**) and using the API you are in control of which facets you care about. For example, searching for port:22 and faceting on the ssh.fingerprint facet will give you a breakdown of which SSH fingerprints are most commonly seen on the Internet. Facets are often the starting point for research into Internet-wide issues such as duplicate SSH keys, negligent hosting providers or countrywide security holes.

At the moment, facets are only available from the API and the Shodan command-line interface.

Getting Started

All the examples will be provided in Python and assume you have access to the command-line, though there are Shodan libraries/ clients <u>available in other languages</u> as well.

To install the Shodan library for Python run the following command:

```
easy_install shodan
```

If you already have it installed and want to upgrade to the latest version:

```
easy_install -U shodan
```

Initialization

The first thing that always has to be done is initializing the Shodan API object:

```
import shodan
api = shodan.Shodan('YOUR API KEY')
```

Where **YOUR API KEY** is the API key for you account which you can obtain from:

https://account.shodan.io

Search

Now that we have our API object all good to go, we're ready to perform a search:

Stepping through the code, we first call the Shodan.search() method on the api object which returns a dictionary of result information. We then print how many results were found in total, and finally loop through the returned matches and print their IP and banner. Each page of search results contains up to 100 results.

There's a lot more information that gets returned by the function. See below for a shortened example dictionary that Shodan.search returns:

See Appendix A for a complete list of properties that the banner may contain.

Important: By default, a few of the large fields in the banner such as "html" get truncated to reduce bandwidth usage. If you want to retrieve all the information simply disable minification using minify=False. For example, the following search query for anonymous VNC services would ensure all information is returned:

```
results = api.search('has_screenshot:true', minify=False)
```

It's also good practice to wrap all API requests in a try/ except clause, since any error will raise an exception. But for simplicity's sake, I will leave that part out from now on.

The above script only outputs the results from the 1st page of results. To get the 2nd page of results or more simply use the page parameter when doing the search request:

```
results = api.search('apache', page=2)
```

Or if you want to simply loop over all possible results there's a method to make your life easier called search_cursor()

Important: The search_cursor() method only returns the banners and doesn't let you use facets. Only use it to loop over results.

Host Lookup

To see what Shodan has available on a specific IP we can use the Shodan.host() function:

By default, Shodan only returns information on the host that was recently collected. If you would like to get a full history of an IP address, include the history parameter. For example:

```
host = api.host('217.140.75.46', history=True)
```

The above would return all banners, including for services that may no longer be active on the host.

Scanning

Shodan crawls the Internet at least once a month, but if you want to request Shodan to scan a network immediately you can do so using the on-demand scanning capabilities of the API.

Unlike scanning via a tool such as Nmap, the scanning with Shodan is done asynchronously. This means that after you submit a request to Shodan you don't get back the results immediately. It is up to the developer to decide how the results of the scan should be gathered: by looking up the IP information, searching Shodan or subscribing to the real-time stream. The Shodan command-line interface creates a temporary network alert after a scan was initiated and then waits for results to come through the real-time stream.

```
scan = api.scan('198.20.69.0/24')
```

It's also possible to submit a list of networks at once by providing a list of addresses in CIDR notation:

```
scan = api.scan(['198.20.49.30', '198.20.74.0/24'])
```

After submitting a scan request the API will return the following information:

```
{
    'id': 'R2XRT5HH6X67PFAB',
    'count': 1,
    'credits_left': 5119
}
```

The object provides a unique id that you can use for tracking purposes, the total count of IPs that were submitted for scanning and finally how many scan credits are left (credits_left).

Real-Time Stream

The Streaming API is an HTTP-based service that returns a real-time stream of data collected by Shodan. It doesn't provide any search or lookup capabilities, it is simply a feed of everything that is gathered by the crawlers.

For example, here is a script that outputs a stream of banners from devices that are vulnerable to FREAK (CVE-2015-0204):

```
def has_vuln(banner, vuln):
    if 'vulns' in banner['opts'] and vuln in banner['opts']['vulns']:
        return True
    return False

for banner in api.stream.banners():
    if has_vuln(banner, 'CVE-2015-0204'):
        print banner
```

To save space and bandwidth many properties in the banner are optional. To make working with optional properties easier it is best to wrap access to properties in a function. In the above example, the has_vuln() method checks whether the service is vulnerable for the provided CVE.

Note: Regular API subscriptions only have access to 1% of the feed. 100% access is available to data license customers only.

Network Alert

A network alert is a real-time feed of data that is being collected by Shodan for a network range. To get started with network alerts requires 2 steps:

Creating a Network Alert

To create a network alert you ned to provide a name and a network range. The name should be descriptive to let you know what the alert is monitoring or why it was created.

```
alert = api.create_alert('Production network', '198.20.69.0/24')
```

As with the scan() method you can also provide a list of network ranges to monitor:

Note: Only a limited number of IPs can be monitored using network alerts and an account can't have more than 100 alerts active.

A useful trick when combining network alerts with the scanning API is to set an expiration for the alert:

```
alert = api.create_alert('Temporary alert', '198.20.69.0/24', expires=60)
```

The above alert would be active for 60 seconds and then expire, at which point the alert can't be used any more.

Upon successfully creating an alert, the API will return the following object:

Subscribing

Once an alert has been created it is ready to be used as a real-time stream of data for that network.

As with the regular, real-time stream the alert() method provides an iterator where each item is a banner as it's being collected by the Shodan crawlers. The only argument that the alert() method requires is the alert ID that was returned when creating the network alert.

Example: Public MongoDB Data

<u>MongoDB</u> is a popular <u>NoSQL</u> database and for a long time it didn't come with any authentication. This has resulted in many instances of MongoDB being publicly accessible on the Internet. Shodan grabs a banner for these databases that contains a lot of information about the data stored. Following is an excerpt from the banner:

```
MongoDB Server Information...
    "ok": 1.0,
    "tokumxAuditVersion": "unknown",
    "bits": 64,
    "tokukvVersion": "unknown",
    "tokumxVersion": "2.0.2",
    "javascriptEngine": "V8"
    "version": "2.4.10",
    "versionArray": [
        4.
        10,
    "compilerFlags": "-fPIC -fno-strict-aliasing -ggdb -Wall -Wsign-compare -Wno\
-unknown-pragmas -Winvalid-pch -pipe -Wnon-virtual-dtor -Woverloaded-virtual -Wn\
o-unused-local-typedefs -fno-builtin-memcmp -03", 
"maxBsonObjectSize": 16777216,
    "sysInfo": "Linux vps-vivid-x64-04 2.6.32-042stab106.6 #1 SMP Mon Apr 20 14:\
48:47 MSK 2015 x86_64 x86_64 x86_64 GNU/Linux BOOST_LIB_VERSION=1_55",
    "loaderFlags": "
    "gitVersion": "unknown"
},
```

Basically, the banner is made up of a header that says "MongoDB Server Information" followed by 3 JSON objects that are separated by commas. Each JSON object contains different information about the database and I recommend you check out a full banner on Shodan (it's very long) by searching for:

```
product:MongoDB
```

Lets use the banner information to determine which database names are most popular and how much data is publicly exposed on the Internet! The basic workflow will be to:

- 1. Download all MongoDB banners
- 2. Process the downloaded file and output a list of top 10 database names as well as the total data size

Downloading the data is simple using the **Shodan command-line interface**:

```
shodan download --limit -1 mongodb.json.gz product:mongodb
```

The above command says to download all results (—**limit -1**) into a file called **mongodb.json.gz** for the search query **product:mongodb**. Now we just need a simple Python script to process the Shodan data file. To easily iterate over the file we're going to use the **shodan.helpers.iterate_files()** method:

```
import shodan.helpers as helpers
import sys
```

```
# The datafile is the 1st argument to the command
datafile = sys.argv[1]

for banner in helpers.iterate_files(datafile):
    # Now we have the banner
```

Since each banner is just JSON with some added header, lets process the banner into a native Python dictionary using the **simplejson** library:

```
# Strip out the MongoDB header added by Shodan
data = banner['data'].replace('MongoDB Server Information\n', '').split('\n},\n'\
)[2]
# Load the database information
data = simplejson.loads(data + '}')
```

The only thing that's left is keeping track of the total amount of data that's exposed and the most popular database names:

```
total_data = 0
databases = collections.defaultdict(int)
...

# Then in the loop
# Keep track of how much data is publicly accessible
total_data += data['totalSize']

# Keep track of which database names are most common
for db in data['databases']:
    databases[db['name']] += 1
```

Python has a useful **collections.defaultdict** class that automatically creates a default value for a dictionary key if the key doesn't yet exist. And we just access the **totalSize** and **databases** property of the MongoDB banner to gather the information we care about. Finally, we just need to output the actual results:

```
print('Total: {}'.format(humanize_bytes(total_data)))

counter = 1
for name, count in sorted(databases.iteritems(), key=operator.itemgetter(1), rev\
erse=True)[:10]:
    print('#{}\t{}: {}'.format(counter, name, count))
    counter += 1
```

First, we print the total amount of data that's exposed and we're using a simple **humanize_bytes()** method to convert bytes into human-readable format of GB/ MB/ etc. Second, we loop sort the **databases** collection in **reverse** order by the number of times that a certain database name was seen (**key=operator.itemgetter(1)**) and get the top 10 results (**[:10]**).

Below is the full script that reads a Shodan data file and analyzes the banner:

```
import collections
import operator
import shodan.helpers as helpers
import sys
import simplejson

def humanize_bytes(bytes, precision=1):
    """Return a humanized string representation of a number of bytes.
    Assumes `from __future__ import division`.
```

```
>>> humanize_bytes(1)
    '1 byte'
    >>> humanize_bytes(1024)
    '1.0 kB'
    >>> humanize_bytes(1024*123)
    '123.0 kB'
    >>> humanize_bytes(1024*12342)
    '12.1 MB'
    >>> humanize_bytes(1024*12342,2)
    '12.05 MB'
    >>> humanize_bytes(1024*1234,2)
    '1.21 MB'
    >>> humanize_bytes(1024*1234*1111,2)
    >>> humanize_bytes(1024*1234*1111,1)
    '1.3 GB'
    abbrevs = (
        (1<<50L, 'PB'),
        (1<<40L, 'TB'),
(1<<30L, 'GB'),
(1<<20L, 'MB'),
        (1<<10L, 'kB'),
        (1, 'bytes')
    if bytes == 1:
        return '1 byte'
    for factor, suffix in abbrevs:
        if bytes >= factor:
            break
    return '%.*f %s' % (precision, bytes / factor, suffix)
total_data = 0
databases = collections.defaultdict(int)
for banner in helpers.iterate_files(sys.argv[1]):
        # Strip out the MongoDB header added by Shodan
        data = banner['data'].replace('MongoDB Server Information\n', '').split(\
'\n},\n')[2]
        # Load the database information
        data = simplejson.loads(data + '}')
        # Keep track of how much data is publicly accessible
        total_data += data['totalSize']
        # Keep track of which database names are most common
        for db in data['databases']:
            databases[db['name']] += 1
    except Exception, e:
        pass
print('Total: {}'.format(humanize_bytes(total_data)))
counter = 1
for name, count in sorted(databases.iteritems(), key=operator.itemgetter(1), rev\
erse=True)[:10]:
    print('#{}\t{}: {}'.format(counter, name, count))
    counter += 1
```

Here's a sample output of the script:

```
Total: 1.8 PB
        local: 85845
#1
#2
        admin: 67648
#3
        test: 24983
#4
        s: 5121
#5
        config: 4329
        proxy: 2045
#6
#7
        research: 2007
#8
        seolib_new: 2001
#9
        traditional: 1998
#10
        simplified: 1998
```

Exercises: Shodan API

Exercise 1

Write a script to monitor a network using Shodan and send out notifications.

Exercise 2

Write a script to output the latest images into a directory.

Tip: Images are encoded using base64. Python can easily decode it into binary using: image_string.decode('base64')

Industrial Control Systems

In a nutshell, industrial control systems (ICS) are computers that control the world around you. They're responsible for managing the air conditioning in your office, the turbines at a power plant, the lighting at the theatre or the robots at a factory.

Research conducted from 2012 through 2014 by <u>Project SHINE</u> (SHodan INtelligence Extraction) indicates there are at least 2 million publicly accessible devices related to ICS on the Internet. The first dataset containing 500,000 ICS devices was sent in 2012 to the ICS-CERT. The ICS-CERT determined that roughly <u>7,200 out of the 500,000 were critical infrastructure</u> in the United States. And with the demand for increased connectivity in everything that number is expected to rise. There have been efforts to secure these devices by taking them offline or patching flaws, but it's a challenging problem and there isn't an easy solution.

Common Abbreviations

Before getting into the protocols and how to find ICS devices, here are a few common abbreviations that are useful to know:

BMS Building Management System
 DCS Distributed Control System
 HMI Human Machine Interface
 ICS Industrial Control System
 PLC Programmable Logic Controller

RTU Remote Terminal Unit

SCADA Supervisory Control and Data Acquisition (a subset of ICS)


VNC Virtual Network Computing

Protocols

There are 2 different ways of identifying control systems on the Internet:

Non-ICS protocols used in an ICS environment

The majority of the ICS findings on Shodan are discovered by searching for web servers or other popular protocols that aren't directly linked to ICS but may be seen on an ICS network. For example: a web server running on an HMI or a Windows computer running unauthenticated remote desktop while connected to an ICS. These protocols provide you with a visual view of the ICS but they usually have some form of authentication enabled.

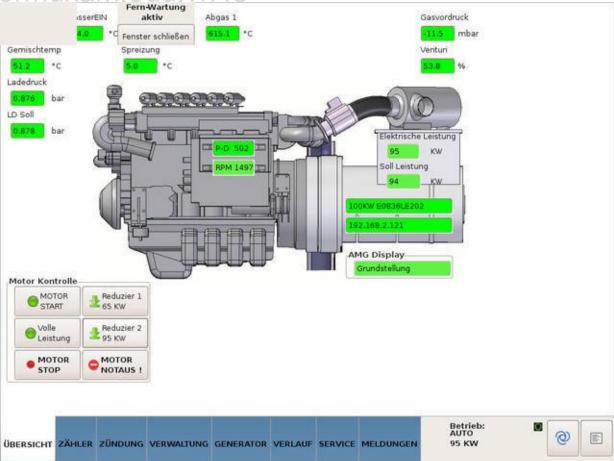

The above is an HMI for an engine exposed via an unauthenticated VNC connection found on **Shodan Images**.

ICS protocols

These are the raw protocols that are used by the control systems. Every ICS protocol has its own unique banner but there's one thing they all have in common: they don't require any authentication. This means that if you have remote access to an industrial device you automatically have the ability to arbitrarily read and write to it. However, the raw ICS protocols tend to be proprietary and hard to develop with. This means that it's easy to check whether a device supports an ICS protocol using Shodan but hard to actually interact with the control system.

The following banner describes a Siemens S7 PLC, note that it contains a lot of detailed information about the device including its serial number and location:

```
Serial number of memory card: MMC 26559C8A

Copyright: Original Siemens Equipment

PLC name: SIMATIC 300

Unknown (129): Boot Loader A

Module: 6ES7 315-2EG10-0AB0 v.0.2

Basic Firmware: v.2.3.2

Module name: CPU 315-2 PN/DP

Serial number of module: S C-TNR942412005

Plant identification: Kw Termometria Full

Basic Hardware: 6ES7 315-2EG10-0AB0 v.0.2
```

Securing Internet-Connected ICS

The majority of ICS banners don't contain information on where the device is located or who owns the control system. This makes it exceedingly difficult to secure the device and is one of the main reasons that they continue to stay online after years of research into their online exposure.

If you discover a control system that looks critical, belongs to a government or otherwise shouldn't be online please notify the ICS-CERT

Use Cases

Assessing ICS for the USA

You've been tasked with generating a quick presentation on the exposure of industrial control systems for the USA. To get started, lets first get a general idea of what's out there using the main Shodan website:

https://www.shodan.io/search?query=category%3Aics


This returns a list of all devices running ICS protocols on the Internet. However, there are a lot of webservers and other protocols (SSH, FTP etc.) running on the same ports as industrial control systems which we need to filter out:

https://www.shodan.io/search?query=category%3Aics+-http+-html+-ssh+-ident

Now we have a filtered list of devices running insecure ICS protocols. Since the focus of the presentation will be on the USA, it's time to narrow the results to only IPs in the USA:

https://www.shodan.io/search?query=category%3Aics+-http+-html+-ssh+-ident+country%3Aus


To get a big picture view of the data and have some charts to work with we can generate a <u>free report</u>. This provides us with a better understanding of which ICS protocols are seen on the Internet in the US:

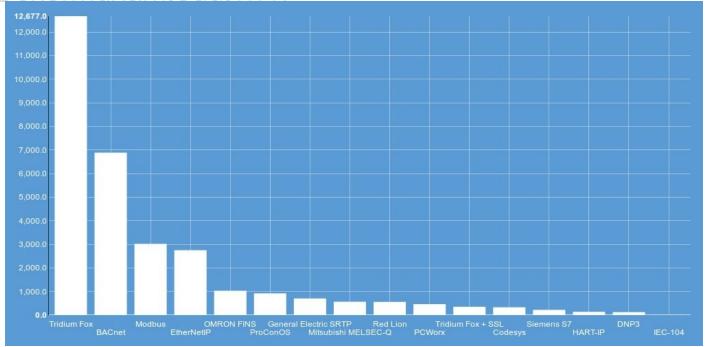

Tridium's Fox protocol, used by their Niagara framework, is the most popular ICS protocol in the US followed by BACnet and Modbus. The data shows that the majority of exposed devices are BMS used in offices, factories, stadiums, auditoriums and various facilities.

The above chart was saved as an image using <u>Nimbus Screen Capture</u> on Firefox, but you can also use the <u>Awesome Screenshot Minus</u> plug-in for Chrome.

The <u>report</u> also highlights a common issue with ICS on the Internet: the majority of them are on mobile networks. This makes it especially difficult to track down and secure these devices.

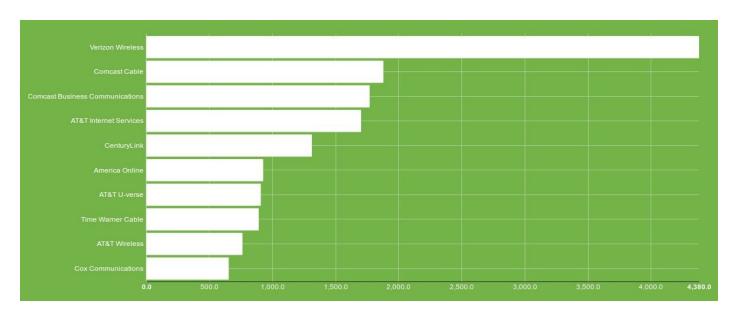

At this point, the data shows us the following:

- 1. There are at least 65,000 ICS on the Internet exposing their raw, unauthenticated interfaces
- 2. Nearly half of them (~31,000) are in the US alone

- 3. Buildings are the most commonly seen type of ICS
- 4. Mobile networks host the largest amount

Further Reading

- 1. <u>Distinguishing Internet-Facing Devices using PLC Programming Information</u>
- 2. NIST Special Publication Guide to Industrial Control Systems Security
- 3. Quantitatively Assessing and Visualizing Industrial System Attack Surfaces

Identifying Honeypots

Honeypots have become an increasingly popular and useful tool in understanding attackers. I've seen many misconfigured honeypots while scanning the Internet, here are a few tips to identify them or mistakes to avoid when setting them up.

What is a honeypot?

A honeypot is a device that pretends to be something it actually isn't for the purpose of logging and monitoring network activity. In the case of control systems, an ICS honeypot is a regular computer that pretends to be a control system such as a factory or power plant. They are used to collect information on attackers, including which networks the attackers are targeting, what tools they're using and many other useful insights that help defenders harden their network.

In recent years, honeypots have been used to measure the number of attacks that have been attempted against industrial control systems connected to the Internet. However, it is critically important to understand proper honeypot deployment before trying to gather the data. Many people misconfigure their honeypots and I will outline how those mistakes make it trivial to determine whether a device is a real control system or a honeypot.

The most popular and de-facto honeypot used to simulate industrial control systems is <u>Conpot</u>. The software is well-written and extremely powerful when properly configured. Most of the examples and discussion will be using Conpot but the principles apply to all honeypot software.

Why Detect Them?


The data that honeypots generate is only as good as their deployment. If we want to make informed decisions about who is attacking control systems we have to ensure the data is being gathered from realistic honeypots. Sophisticated attackers won't be fooled by honeypots that are poorly configured. It's important to raise awareness for common pitfalls when deploying honeypots to improve the quality of data being collected.

Default Configurations

The most common mistake that people make when deploying honeypots is using the default configuration. All default configurations return the same banner, including identical serial numbers, PLC names and many other fields that you would expect to vary from IP to IP.

I first realized how common this problem is soon after doing the first Internet scan for Siemens S7:

S7 Serial Number Uniqueness

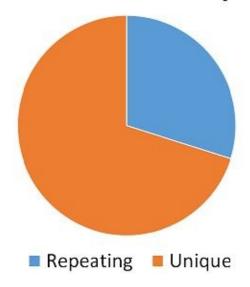

30% of the serial numbers in the results were present in more than one banner. It doesn't mean that all of the duplicate serial numbers are honeypots but it's a good starting point for investigation.

In the case of S7, the most popular serial number seen on the Internet is <u>88111222</u> which is the default serial number for Conpot.

Showing results 1 - 10 of 110
91.229.57.200
FH JOANNEUM Gesellschaft mbH
Added on 2015-12-11 23:26:59 GMT
Austria, Allerheiligen Bei Wildon
Details

Location designation of a module: Copyright: Original Siemens Equipment Module type: IM151-8 PN/DP CPU

PLC name: Technodrome Module: v.0.0

Plant identification: Mouser Factory

OEM ID of a module:

Module name: Siemens, SIMATIC, S7-200 Serial number of module: **88111222**

54.164.128.60
ec2-54-164-128-60.compute-1.amazonaws.com
AMAZON
Added on 2015-12-11 15:00:37 GMT
United States, Ashburn
Details

Location designation of a module: Copyright: Original Siemens Equipment Module type: IM151-8 PN/DP CPU

PLC name: Technodrome Module: v.0.0

Plant identification: Mouser Factory

OEM ID of a module:

Module name: Siemens, SIMATIC, \$7-200 Serial number of module: **88111222**

Searching by the serial number makes it trivial to locate instances of Conpot on the Internet. And make sure to also change the other properties of the banner, not just the serial number:



Location designation of a module: Copyright: Original Siemens Equipment

Module type: CPU 315-2 PN/DP

PLC name: Technodrome

Module: v.0.0

Plant identification: Mouser Factory

OEM ID of a module:

Module name: Siemens, SIMATIC, S7-200 Serial number of module: S C-C4VD66352012

The above user changed the serial number to a unique value but failed to change the PLC name (**Technodrome**) and the plant identification (**Mouser Factory**). Every honeypot instance must have unique values in order to evade honeypot detection techniques.

History Matters

The honeypot has to be deployed properly from day 1 otherwise the banner history for the device will reveal it as a honeypot. For example:

Location designation of a module: Copyright: Original Siemens Equipment Module type: IM151-8 PN/DP CPU

PLC name: PG[random.randint(0,1) f

Module: v.0.0

Plant identification: Power Generation One

OEM ID of a module:

Module name: Siemens, SIMATIC, S7-200 Serial number of module: 8675309

The above is a banner pretending to be a Siemens S7 PLC. However, there was an error in the template generating the banner and instead of showing a valid PLC name it shows the template's **random.randint(0,1)** method. Shodan has indexed this banner and even if the bug is fixed in the future a user could look up the history for this IP and see that it used to have an invalid S7 banner.

A sample Shodan API request for the history of an IP:

host = api.host('xxx.xxx.xxx', history=True)

Emulate Devices, Not Services

Keep it simple, don't try to emulate too many services at once. A honeypot should emulate a device and most real devices don't run MongoDB, DNP3, MySQL, Siemens S7, Kamstrup, ModBus, Automated Tank Gauge, Telnet and SSH on the same IP.



Think about how the device is configured in the real-world and then emulate it, don't run every possible service simply because it's possible.


In code, you could use the number of ports as a metric:

Location, Location

It isn't just the software that needs to be properly configured, a honeypot also has to be hosted on a network that could reasonably have a control system. Putting a honeypot that simulates a Siemens PLC in the Amazon cloud doesn't make any sense. Here are a few of the popular cloud hosting providers that should be avoided when deploying an ICS honeypot:


- 1. Amazon EC2
- 2. Rackspace
- 3. Digital Ocean
- 4. Vultr
- 5. Microsoft Azure
- Google Cloud

For realistic deployment, look at the most popular ISPs in Shodan for publicly accessible ICS. In general, it is better to put the honeypot in the IP space of a residential ISP. The following organizations are the common locations in the USA:

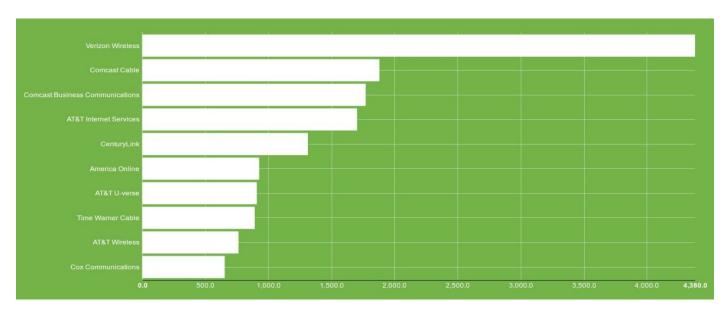

Honeyscore

I developed a tool called <u>Honeyscore</u> that uses all of the aforementioned methods as well as machine learning to calculate a **honeyscore** and determine whether an IP is a honeypot or not.

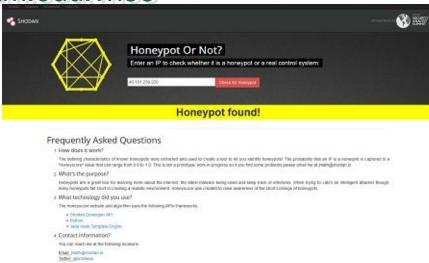

Simply enter the IP address of a device and the tool will perform a variety of checks to see whether it is a honeypot.

Further Reading

- 1. Wikipedia article on honeypots
- 2. Breaking Honeypots for Fun and Profit (Video)

Appendix A: Banner Specification

For the latest list of fields that the banner contains please visit the <u>online documentation</u>. A banner may contain the following properties/ fields:

General Properties

Name	Description	Example
asn	Autonomous system number	AS4837
data	Main banner for the service	HTTP/1.1 200
ip	IP address as an integer	493427495
ip_str	IP address as a string	199.30.15.20
ipv6	IPv6 address as a string	2001:4860:4860::8888
port	Port number for the service	80
timestamp	Date and time the information was	2014-01-
umestamp	collected	15T05:49:56.283713
hostnames	List of hostnames for the IP	["shodan.io",
		"www.shodan.io"]
domains	List of domains for the IP	["shodan.io"]
link	Network link type	Ethernet or modem
location	Geographic location of the device	see below
opts	Supplemental data not contained	
opts	in main banner	
org	Organization that is assigned the IP	Google Inc.
isp	ISP that is responsible for the IP	Verizon Wireless
	Space Operating system	T :
OS	Operating system	Linux
uptime	Uptime of the IP in minutes	50
t	Type of transport protocol used to	t and
transport	collect banner; either "udp" or "tcp"	tcp

HTTP(S) Properties

Name	Description
html	HTML content of the website
title	Title of the website

Location Properties

The following properties are sub-properties of the **location** property that is at the top-level of the banner record.

Name	Description
area_code	Area code of the device's location
city	Name of the city
country_code	2-letter country code
country_code3	3-letter country code
country_name	Full name of the country
dma_code	Designated market area code (US-only)
latitude	Latitude
longitude	Longitude
postal_code	Postal code
region_code	Region code

SSL Properties

If the service is wrapped in SSL then Shodan performs additional testing and makes the results available in the following properties:

Name	Description
ssl.cert	Parsed SSL certificate
ssl.cipher	Preferred cipher for the SSL connection
ssl.chain	List of SSL certificates from the user certificate up to
	the root certificate
ssl.dhparams	Diffie-Hellman parameters
	Supported SSL versions; if the value starts with a "-"
ssl.versions	then the service does <i>not</i> support that version (ex. "-
	SSLv2" means the service doesn't support SSLv2)

Special Properties

_shodan

The **_shodan** property contains information about how the data was gathered by Shodan. It is different than all the other properties because it doesn't provide information about the device. Instead, it will tell you which banner grabber Shodan was using to talk to the IP. This can be important to understand for ports where multiple services might be operating on. For example, port 80 is most well-known for web servers but it's also used by various malware to circumvent firewall rules. The **_shodan** property would let you know whether the **http** module was used to collect the data or whether a malware module was used.

Example

```
'org": "AT&T U-verse",
  "guid": "1664007502:75a821e2-7e89-11e3-8080-808080808080",
  "data": "NTP\nxxx.xxx.xxx.xxx:7546\n68.94.157.2:123\n68.94.156.17:123",
  "port": 123,
  "isp": "AT&T U-verse",
"asn": "AS7018",
  "location": {
   "country_code3": "USA",
"city": "Atlanta",
   "postal_code": "30328",
   "longitude": -84.3972,
   "country_code": "US",
   "latitude": 33.93350000000001,
   "country name": "United States",
   "area_code": 404,
   "dma_code": 524,
   "region_code": null
  },
"ip": 1664007502,
  "domains": [
   "sbcglobal.net"
  ],
"ip_str": "99.46.189.78",
  "os": null,
  "opts": {
   "ntp": {
    "more": false
   }
  }
 }
```

Appendix B: List of Search Filters

General Filters

Name	Description	Type
after	Only show results after the given date (dd/mm/yyyy)	string
asn	Autonomous system number	string
before	Only show results before the given date (dd/mm/yyyy)	string
category	Available categories: ics, malware	string
city	Name of the city	string
country	2-letter country code	string
geo	Accepts between 2 and 4 parameters. If 2 parameters: latitude,longitude. If 3 parameters: latitude,longitude,range. If 4 parameters: top left latitude, top left longitude, bottom right latitude, bottom right longitude.	string
has_ipv6	True/ False	boolean
has_screenshot	True/ False	boolean
hostname	Full hostname for the device	string
html	HTML of web banners	string
ip	Alias for net filter	string
isp	ISP managing the netblock	string
net	Network range in CIDR notation (ex. 199.4.1.0/24)	string
org	Organization assigned the netblock	string
OS	Operating system	string
port	Port number for the service	integer
postal	Postal code (US-only)	string
product	Name of the software/ product providing the banner	string
region	Name of the region/ state	string
state	Alias for region	string
title	Title for the web banner's website	string
version	Version for the product	string
vuln	CVE ID for a vulnerability	string

NTP Filters

Name	Description	
ntp.ip	IP addresses returned by monlist	string
ntp.ip_count	Number of IPs returned by initial monlist	integer
ntp.more	True/ False; whether there are more IP addresses to be gathered from monlist	boolean
ntp.port	Port used by IP addresses in monlist	integer

SSL Filters

Name	Description	Type
has_ssl	True/ False	boolean
ssl	Search all SSL data	string
ssl.alpn	Application layer protocols such as HTTP/2 ("h2")	string
ssl.chain_count	Number of certificates in the chain	integer
ssl.version	Possible values: SSLv2, SSLv3, TLSv1, TLSv1.1, TLSv1.2	string
ssl.cert.alg	Certificate algorithm	string
ssl.cert.expired	True/ False	boolean
ssl.cert.extension	Names of extensions in the certificate	string
ssl.cert.serial	Serial number as an integer or hexadecimal string	integer/ string
ssl.cert.pubkey.bits	Number of bits in the public key	integer
ssl.cert.pubkey.type	Public key type	string
ssl.cipher.version	SSL version of the preferred cipher	string
ssl.cipher.bits	Number of bits in the preferred cipher	integer
ssl.cipher.name	Name of the preferred cipher	string

Telnet Filters

Name	Description	Type
telnet.option	Search all the options	string
telnet.do	The server requests the client do support these options	string
telnet.dont	The server requests the client to not support these options	string
telnet.will	The server supports these options	string
telnet.wont	The server doesn't support these options	string

Appendix C: Search Facets

General Facets

Name	Description
asn	Autonomous system number
city	Full name of the city
country	Full name of the country
domain	Domain(s) for the device
has_screenshot	Has screenshot available
isp	ISP managing the netblock
link	Type of network connection
org	Organization owning the netblock
os	Operating system
port	Port number for the service
postal	Postal code
product	Name of the software/ product for the banner
region	Name of the region/ state
state	Alias for region
uptime	Time in seconds that the host has been up
version	Version of the product
vuln	CVE ID for vulnerability

NTP Facets

Name	Description
ntp.ip	IP addresses returned by monlist
ntp.ip_count	Number of IPs returned by initial monlist
ntp.more	True/ False; whether there are more IP addresses to be gathered from monlist
ntp.port	Port used by IP addresses in monlist

SSH Facets

Name	Description
ssh.cipher	Name of the cipher
ssh.fingerprint	Fingerprint for the device
ssh.mac	Name of MAC algorithm used (ex: hmac-sha1)
ssh.type	Type of authentication key (ex: ssh-rsa)

SSL Facets

Name	Description
ssl.version	SSL version supported
ssl.alpn	Application layer protocols
ssl.chain_count	Number of certificates in the chain
ssl.cert.alg	Certificate algorithm
ssl.cert.expired	True/ False; certificate expired or not
ssl.cert.serial	Certificate serial number as integer
ssl.cert.extension	Name of certificate extensions
ssl.cert.pubkey.bits	Number of bits in the public key
ssl.cert.pubkey	Name of the public key type
ssl.cipher.bits	Number of bits in the preferred cipher
ssl.cipher.name	Name of the preferred cipher
ssl.cipher.version	SSL version of the preferred cipher

Telnet Facets

Name	Description
telnet.option	Show all options
telnet.do	The server requests the client do support these options
telnet.dont	The server requests the client to not support these
temet.dom	options
telnet.will	The server supports these options
telnet.wont	The server doesn't support these options

Appendix D: List of Ports

Port	Service(s)	
7	Echo	
11	Systat	
13	Daytime	
15	Netstat	
17	Quote of the day	
19	Character generator	
21	FTP	
22	SSH	
23	Telnet	
25	SMTP	
26	SSH	
37	rdate	
49	TACACS+	
53	DNS	
67	DHCP	
69	TFTP, BitTorrent	
79	Finger	
80	HTTP, malware	
81	HTTP, malware	
82	HTTP, malware	
83	HTTP	
84	HTTP	
88	Kerberos	
102	Siemens S7	
110	POP3	
111	Portmapper	
119	NNTP	
123	NTP	
129	Password generator protocol	
137	NetBIOS	
143	IMAP	
161	SNMP	
175	IBM Network Job Entry	
179	BGP	
195	TA14-353a	
311	OS X Server Manager	

		.eau.vnoz
389		LDAP
443		HTTPS
444		TA14-353a, Dell SonicWALL
445		SMB
465		SMTPS
500		IKE (VPN)
502		Modbus
503		Modbus
515		Line Printer Daemon
520		RIP
523		IBM DB2
554		RTSP
587		SMTP mail submission
623		IPMI
626		OS X serialnumbered
666		Telnet
771		Realport
789		Redlion Crimson3
873		rsync
902		VMWare authentication
992		Telnet (secure)
993		IMAP with SSL
995		POP3 with SSL
101	0	malware
102	3	Telnet
102	5	Kamstrup
109	9	Java RMI
117		malware
120		Codesys
123		udpxy
143		MS-SQL monitor
160		Citrix, malware
172		PPTP
183		MQTT
190		UPnP
191		Niagara Fox
196		PCworx
199		malware
200		iKettle, MikroTik bandwidth test
208		cPanel
208		cPanel
208	6	WHM

[1	muxam	.edu.vn63
	2087	WHM
	2123	GTPv1
	2152	GTPv1
	2181	Apache Zookeeper
	2222	SSH, PLC5, EtherNet/IP
	2323	Telnet
	2332	Sierra wireless (Telnet)
	2375	Docker
	2376	Docker
	2404	IEC-104
	2455	CoDeSys
	2480	OrientDB
	2628	Dictionary
	3000	ntop
	3306	MySQL
	3386	GTPv1
	3388	RDP
	3389	RDP
	3460	malware
	3541	PBX GUI
	3542	PBX GUI
	3689	DACP
	3780	Metasploit
	3787	Ventrilo
	4000	malware
	4022	udpxy
	4040	Deprecated Chef web interface
	4063	ZeroC Glacier2
	4064	ZeroC Glacier2 with SSL
	4369	EPMD
	4443	Symantec Data Center Security
	4444	malware
	4500	IKE NAT-T (VPN)
	4567	Modem web interface
	4911	Niagara Fox with SSL
	4949	Munin
	5006	MELSEC-Q
	5007	MELSEC-Q
	5008	NetMobility
	5009	Apple Airport Administration
	5060	SIP

ver
ver
ver
/2.0
malware
et)
ΓTPS)
ard (HTTP)
Access

IIIuxaiii.euu.viioo				
9051	Tor Control			
9100	Printer Job Language			
9151	Tor Control			
9160	Apache Cassandra			
9191	Sierra wireless (HTTP)			
9443	Sierra wireless (HTTPS)			
9595	LANDesk Management Agent			
9600	OMRON			
10001	Automated Tank Gauge			
10243	Microsoft-HTTPAPI/2.0			
11211	Memcache			
17185	VxWorks WDBRPC			
12345	Sierra wireless (Telnet)			
13579	Media player classic web interface			
14147	Filezilla FTP			
16010	Apache Hbase			
18245	General Electric SRTP			
20000	DNP3			
20547	ProconOS			
21025	Starbound			
21379	Matrikon OPC			
23023	Telnet			
23424	Serviio			
25105	Insteon Hub			
25565	Minecraft			
27015	Steam A2S server query, Steam RCon			
27017	MongoDB			
28017	MongoDB (HTTP)			
30718	Lantronix Setup			
32400	Plex			
37777	Dahuva DVR			
44818	EtherNet/IP			
47808	Bacnet			
49152	Supermicro (HTTP)			
49153	WeMo Link			
50070	HDFS Namenode			
51106	Deluge (HTTP)			
54138	Toshiba PoS			
55553	Metasploit			
55554	Metasploit			
62078	Apple iDevice			
64738	Mumble			

Appendix E: Sample SSL Banner

```
{
    "hostnames": [],
    "title": "",
    "ip": 2928565374,
    "isp": "iWeb Technologies",
    "transport": "tcp",
    "data": "HTTP/1.1 200 OK\r\nExpires: Sat, 26 Mar 2016 11:56:36 GMT\r\nExpire\
s: Fri, 28 May 1999 00:00:00 GMT\r\nCache-Control: max-age=2592000\r\nCache-Cont\
rol: no-store, no-cache, must-revalidate\r\nCache-Control: post-check=0, pre-che\
ck=0\r\nLast-Modified: Thu, 25 Feb 2016 11:56:36 GMT\r\nPragma: no-cache\r\nP3P:\
CP=\"NON COR CURa ADMa OUR NOR UNI COM NAV STA\"\r\nContent-type: text/html\r\n\
Transfer-Encoding: chunked\r\nDate: Thu, 25 Feb 2016 11:56:36 GMT\r\nServer: sw-\
cp-server\r\n\r\n"
    "asn": "AS32613",
    "port": 8443,
    "ssl": {
        "chain": ["-----BEGIN CERTIFICATE-----\nMIIDszCCApsCBFBTb4swDQYJKoZIhvcN\
AQEFBQAwgZ0xCzAJBgNVBAYTAlVTMREw\nDwYDVQQIEwhWaXJnaW5pYTEQMA4GA1UEBxMHSGVybmRvbj\
ESMBAGA1UEChMJUGFy\nYWxsZWxzMRgwFgYDVQQLEw9QYXJhbGx1bHMgUGFuZWwxGDAWBgNVBAMTD1Bh\
cmFs\nbGVscyBQYW51bDEhMB8GCSqGSIb3DQEJARYSaW5mb0BwYXJhbGx1bHMuY29tMB4X\nDTEyMDkx\
NDE3NTUyM1oXDTEzMDkxNDE3NTUyM1owgZ0xCzAJBgNVBAYTA1VTMREw\nDwYDVQQIEwhWaXJnaW5pYT\
EQMA4GA1UEBxMHSGVybmRvbjESMBAGA1UEChMJUGFy\nYWxsZWxzMRgwFgYDVQQLEw9QYXJhbGx1bHMg\
UGFuZWwxGDAWBgNVBAMTD1BhcmFs\nbGVscyBQYW51bDEhMB8GCSqGSIb3DQEJARYSaW5mb0BwYXJhbG\
xlbHMuY29tMIIB\nIjANBqkqhkiG9w0BAQEFAAOCAO8AMIIBCqKCAQEAxc9Vy/qajKtFFnHxGOFPHTxm\
\nSOnsffWBTBfyXnK3h8u041VxvZDh3XkpA+ptg2fW0uIT0TTYuqw+tqiDmg8YTsHy\njcpMFBtXV2cV\
dhKXaS3YY1M7dP3gMmkGmH+ZvCgCYc7L9MIJxYJy6Zeuh67YxEMV\ngiU8mZpvc70Cg5WeW1uBCXtUAi\
jDLsVWnhsV3YuxlweEvkRpAk3EHehKbvgMnEZS\nQ30QySe0GAqC7bWzKrwsJAOUk/+Js18+3QKb/LmD\
a9cRjtFCTo6hYfPbfHj8RxQh\n4Xmnn/CtZ48wRQTqKXSO6+Zk3OuU7/jX1Gt/jxN6n77673e6uCsggT\
wut/EtNwID\nAQABMA0GCSqGSIb3DQEBBQUAA4IBAQBb/yTy76Ykwr7DB0PAXc766n730sZizjAt\n1k\
mx7LxgN3X/wFxD53ir+sd0qbPgJl3edrE/ZG9dN16LhUBbUK+9s6z9QicEfSxo\n4uQpFSywbGGmXInE\
ZmyT4SsOLi/hNgy68f49LO1h6rn/p70gIKd31g7189ZfFkFb\nRdD49s11/Cc5Nm4XapUVvmnS91MlPk\nSp1m12fkFb
/00Ig1Lu1rYkuc8sIoZdPbep52H3Ga7TjG\nkm07nUIii0goB7TQ63mU67+NWHAmQQ8CtCDCN49kJyen\
1WFjD6Je2U4q0IFQrxHw\nMy+tquo/n/sa+NV8Q0j1gMVcFsLhYm7Z5Z0Ng0QFXSAL+Eyj/AwZ\n----\
-END CERTIFICATE----\n"],
        "cipher": {
            "version": "TLSv1/SSLv3",
            "bits": 256,
            "name": "DHE-RSA-AES256-GCM-SHA384"
       },
"alpn": [],
"ams":
        "dhparams": {
    "prime": "b10b8f96a080e01dde92de5eae5d54ec52c99fbcfb06a3c69a6a9dca52\
\tt d23b616073e28675a23d189838ef1e2ee652c013ecb4aea906112324975c3cd49b83bfaccbdd7d90 \cite{Acceptain}
c4bd7098488e9c219a73724effd6fae5644738faa31a4ff55bccc0a151af5f0dc8b4bd45bf37df36\
5c1a65e68cfda76d4da708df1fb2bc2e4a4371"
            "public key": "2e30a6e455730b2f24bdaf5986b9f0876068d4aa7a4e15c9a1b9c\
a05a420e8fd3b496f7781a9423d3475f0bedee83f0391aaa95a738c8f0e250a8869a86d41bdb0194 \\ \\ \\
66dba5c641e4b2b4b82db4cc2d4ea8d9804ec00514f30a4b6ce170b81c3e1ce4b3d17647c8e5b8f6\
65bb7f588100bcc9a447d34d728c3709fd8a5b7753b",
            "bits": 1024,
            "generator": "a4d1cbd5c3fd34126765a442efb99905f8104dd258ac507fd6406c\
ff14266d31266fea1e5c41564b777e690f5504f213160217b4b01b886a5e91547f9e2749f4d7fbd7\
5918d08bc8858f4dcef97c2a24855e6eeb22b3b2e5",
            "fingerprint": "RFC5114/1024-bit MODP Group with 160-bit Prime Order\
 Subgroup"
        "versions": ["TLSv1", "-SSLv2", "SSLv3", "TLSv1.1", "TLSv1.2"]
    "html": "\n\t\t<html><head>\n\t\t<meta charset=\"utf-8\">\n\t\t<meta http-eq\
uiv=\"X-UA-Compatible\" content=\"IE=edge,chrome=1\">\n\t\t<title></title>\n\t\t\
<script language=\"javascript\" type=\"text/javascript\" src=\"/javascript/commo\</pre>
n.js?plesk_version=psa-11.0.9-110120608.16\"/></script>\n\t\t<script language=\"\
javascript\" type=\"text/javascript\" src=\"/javascript/prototype.js?plesk_versi\
on=psa-11.0.9-110120608.16\"</script>\n\t\t\script>\n\t\t\tvar opt_no_frames = \
false;\n\t\tvar opt_integrated_mode = false;\n\t\t</script>\n\t\t\n\t\t</head>\
```

}

<body onLoad=\";top.location='/login.php3?window_id=&requested_url=https%3A%\
2F%2F174.142.92.126%3A8443%2F';\"></body><noscript>You will be redirected to the\ new address in 15 seconds... If you are not automatically taken to the new loca $\$ tion, please enable javascript or click the hyperlink /login.php3?window_id=&requested_url=https%3A%2F%2F174.142.92.126%3A8443%2F\ .</noscript></html><!--

IE error page size limitation

```
"location": {
          "city": null,
          "region_code": "QC",
          "area_code": null,
"longitude": -73.5833,
          "country_code3": "CAN",
          "latitude": 45.5,
          "postal_code": "H3G",
          "dma_code": null,
          "country_code": "CA",
"country_name": "Canada"
     },
"timestamp": "2016-02-25T11:56:52.548187",
     "domains": [],
     "org": "iWeb Technologies",
"os": null,
     "_shodan": {
          "options": {},
"module": "https",
          "crawler": "122dd688b363c3b45b0e7582622da1e725444808"
     },
"opts": {
"bear
          "heartbleed": "2016/02/25 03:56:45 ([]uint8) {\n 00000000 02 00 74 63 6\
5 6e 73 75 73 2e 73 68 6f 64 61 6e |..tcensus.shodan|\n 00000010 2e 69 6f 53 \
45 43 55 52 49 54 59 20 53 55 52 56 |.ioSECURITY SURV|\n 00000020 45 59 fe 7a\
 a2 0d fa ed 93 42 ed 18 b0 15 7d 6e |EY.z....B....]n|\n 00000030 29 08 f6 f\
8 ce 00 b1 94 b5 4b 47 ac dd 18 aa b9 |)......KG.....|\n 00000040 db 1c 01 \
45 95 10 e0 a2 43 fe 8e ac 88 2f e8 75 |...E....C..../.u|\n 00000050 8b 19 5f\
8c e0 8a 80 61 56 3c 68 0f e1 1f 73 9e |..._...aV<h...s.|\n 00000060 61 4f d\
a db 90 ce 84 e3 79 5f 9d 6c a0 90 ff fa | | a0.....y_.1....| \n 00000070 d8 16 \
e8 76 07 b2 e5 5e 8e 3e a4 45 61 2f 6a 2d |...v...^.>.Ea/j-|\n 00000080 5d 11\
                                                        |].t..<]|\n}\n\n2016/02/25 03:56:45\
 74 94 03 3c 5d
 174.142.92.126:8443 - VULNERABLE\n",
          "vulns": ["CVE-2014-0160"]
     "ip_str": "174.142.92.126"
```

Exercise Solutions

Website

Exercise 1

title:4sics

Exercise 2

has_screenshot:1 country:se city:nora

https://www.shodan.io/host/81.233.255.165

Exercise 3

```
vuln:CVE-2014-0160 country:se ssl.version:sslv2
vuln:CVE-2014-0160 org:"your organization"
```

Exercise 4

category:ics city:"your city name"

Exercise 5

category:malware country:se

Command-Line Interface

Exercise 1

```
shodan download --limit -1 heartbleed-results country:se,no vuln:CVE-2014-0160 shodan parse --filters location.country_code:SE -0 heartbleed-sweden heartbleed-\results.json.gz
```

Note: The **–filters** argument does case-sensitive searching on properties that are strings, hence the Swedish country code has to be upper-case.

Exercise 2

Shodan API

Replace *YOUR_API_KEY* with the API key for your account as seen on your <u>Shodan</u> Account website.

Exercise 1

Tip: Use the Shodan command-line interface's **alert** command to list and remove alerts. For example:

```
shodan alert list
shodan alert clear
Exercise 2
mkdir images
```

Run the above command to generate a directory to store the images in. Then save the following code in a file such as image-stream.py:

```
#!/usr/bin/env python
import shodan

output_folder = 'images/'
api = shodan.Shodan("YOUR_API_KEY")

for banner in api.stream.banners():
    if 'opts' in banner and 'screenshot' in banner['opts']:
        # All the images are JPGs for now
        # TODO: Use the mimetype to determine file extension
        # TODO: Support IPv6 results

    # Create the file name using its IP address
    filename = '{}/{}.jpg'.format(output_folder, banner['ip_str'])

    # Create the file itself
    output = open(filename, 'w')

# The images are encoded using base64
    output.write(banner['opts']['screenshot'].decode('base64'))
```