

Network Visualization (45 Points)

In the first part of the notebook we will explore the use of different type of attribution algorithms - both gradient and perturbation - for images, and understand their differences using the Captum model interpretability tool for PyTorch.

Link to the Website: <https://captum.ai/> Link to the Github page: <https://github.com/pytorch/captum>.

As an exercise you'll be also asked to implement Saliency Maps from scratch.

- Karen Simonyan, Andrea Vedaldi, and Andrew Zisserman. "Deep Inside Convolutional Networks: Visualising Image Classification Models and Saliency Maps", ICLR Workshop 2014.
- Mukund Sundararajan, Ankur Taly, Qiqi Yan, "Axiomatic Attribution for Deep Networks", ICML, 2017
- Matthew D Zeiler, Rob Fergus, "Visualizing and Understanding Convolutional Networks", Visualizing and Understanding Convolutional Networks, 2013.
- Ramprasaath R. Selvaraju, Michael Cogswell, Abhishek Das, Ramakrishna Vedantam, Devi Parikh, Dhruv Batra, Grad-CAM: Visual Explanations from Deep Networks via Gradient-based Localization, 2016

For the full list of available attribution algorithms please check out: <https://captum.ai/api/>

In the second and third parts we will focus on generating new images, by studying and implementing key components in two papers:

- Szegedy et al, "Intriguing properties of neural networks", ICLR 2014
- Yosinski et al, "Understanding Neural Networks Through Deep Visualization", ICML 2015 Deep Learning Workshop

You will need to first read the papers, and then we will guide you to understand them deeper with some problems.

When training a model, we define a loss function which measures our current unhappiness with the model's performance; we then use backpropagation to compute the gradient of the loss with respect to the model parameters, and perform gradient descent on the model parameters to minimize the loss.

In this homework, we will do something slightly different. We will start from a convolutional neural network model which has been pretrained to perform image classification on the ImageNet dataset. We will use this model to define a loss function which quantifies our current unhappiness with our image, then use backpropagation to compute the gradient of this loss with respect to the pixels of the image. We will then keep the model fixed, and perform gradient descent *on the image* to synthesize a new image which minimizes the loss.

This notebook is the first part of homework 2. We will explore four different techniques:

1. **Saliency Maps:** Saliency maps are a quick way to tell which part of the image influenced the classification decision made by the network.
2. **GradCAM:** GradCAM is a way to show the focus area on an image for a given label.
3. **Fooling Images:** We can perturb an input image so that it appears the same to humans, but will be misclassified by the pretrained network.
4. **Class Visualization:** We can synthesize an image to maximize the classification score of a particular class; this can give us some sense of what the network is looking for when it classifies images of that class.

We will use **PyTorch 1.4** to finish the problems in this notebook, which has been tested with Python3.6 on Linux and Mac.

Suppose you have already installed the dependencies in the last homework. **Before you start this one, here are some preparation work you need to do:**

- Download the imagenet_val_25 dataset

```
cd cs7643/datasets  
bash get_imagenet_val.sh
```

- To install captum (please install the latest version 0.2.0 from source - for more information see <https://github.com/pytorch/captum>).

```
git clone https://github.com/pytorch/captum.git  
cd captum  
pip install -e .
```

- The total credit for this notebook is 45 points - 10 points for each section, and 5 points for the captum attribution calls.
- Although we will run your notebook in grading, you still need to **submit the notebook with all the outputs you generated, in pdf form**. Sometimes it will inform us if we get any inconsistent results with respect to yours.

```
In [1]: import torch  
from torch.autograd import Variable  
from torch.autograd import Function as TorchFunc  
import torchvision  
import torchvision.transforms as T  
import random  
  
import numpy as np  
from scipy.ndimage.filters import gaussian_filter1d  
import matplotlib.pyplot as plt  
import matplotlib  
from cs7643.image_utils import SQUEEZENET_MEAN, SQUEEZENET_STD  
from PIL import Image  
import captum  
  
%matplotlib inline  
plt.rcParams['figure.figsize'] = (10.0, 8.0) # set default size of plots  
plt.rcParams['image.interpolation'] = 'nearest'  
plt.rcParams['image.cmap'] = 'gray'  
print(captum.__version__)  
print(torch.__version__)  
  
0.2.0  
1.4.0
```

Helper Functions

Our pretrained model was trained on images that had been preprocessed by subtracting the per-color mean and dividing by the per-color standard deviation. We define a few helper functions for performing and undoing this preprocessing.

You don't need to do anything in this cell. Just run it.

```

In [2]: def preprocess(img, size=224):
    transform = T.Compose([
        T.Resize(size),
        T.ToTensor(),
        T.Normalize(mean=SQUEEZENET_MEAN.tolist(),
                   std=SQUEEZENET_STD.tolist()),
        T.Lambda(lambda x: x[None]),
    ])
    return transform(img)

def deprocess(img, should_rescale=True):
    transform = T.Compose([
        T.Lambda(lambda x: x[0]),
        T.Normalize(mean=[0, 0, 0], std=(1.0 / SQUEEZENET_STD).tolist()),
        T.Normalize(mean=(-SQUEEZENET_MEAN).tolist(), std=[1, 1, 1]),
        T.Lambda(rescale) if should_rescale else T.Lambda(lambda x: x),
        T.ToPILImage(),
    ])
    return transform(img)

def rescale(x):
    low, high = x.min(), x.max()
    x_rescaled = (x - low) / (high - low)
    return x_rescaled

def blur_image(X, sigma=1):
    X_np = X.cpu().clone().numpy()
    X_np = gaussian_filter1d(X_np, sigma, axis=2)
    X_np = gaussian_filter1d(X_np, sigma, axis=3)
    X.copy_(torch.Tensor(X_np).type_as(X))
    return X

def visualize_attr_maps(attributions, titles, attr_preprocess=lambda attr: attr.permute(1, 2, 0).detach().numpy(),
                        cmap='viridis', alpha=0.7):
    """
    A helper function to visualize captum attributions for a list of captum attribution algorithms.

    attributions(A list of torch tensors): Each element in the attributions list corresponds to an
        attribution algorithm, such as Saliency, Integrated Gradient, Perturbation, etc.
        Each row in the attribution tensor contains
    titles(A list of strings): A list of strings, names of the attribution algorithms corresponding to each element in
        the `attributions` list. len(attributions) == len(titles)
    """

    N = attributions[0].shape[0]
    plt.figure()
    for i in range(N):
        axes = plt.subplot(len(attributions) + 1, N + 1, i+1)
        plt.imshow(X[i])
        plt.axis('off')
        plt.title(class_names[y[i]])

    plt.subplot(len(attributions) + 1, N + 1, N + 1)
    plt.text(0.0, 0.5, 'Original Image', fontsize=14)
    plt.axis('off')
    for j in range(len(attributions)):
        for i in range(N):
            plt.subplot(len(attributions) + 1, N + 1, (N + 1) * (j + 1) + i + 1)
            print(f"attributions shape: {attributions[j][i].shape}")
            attr = np.array(attr_preprocess(attributions[j][i]))
            attr = (attr - np.mean(attr)) / np.std(attr).clip(1e-20)
            attr = attr * 0.2 + 0.5
            attr = attr.clip(0.0, 1.0)
            plt.imshow(attr, cmap=cmap, alpha=alpha)
            plt.axis('off')

    plt.subplot(len(attributions) + 1, N + 1, (N + 1) * (j + 1) + N + 1)
    plt.text(0.0, 0.5, titles[j], fontsize=14)
    plt.axis('off')

    plt.gcf().set_size_inches(20, 13)
    plt.show()

def compute_attributions(algo, inputs, **kwargs):
    """
    A common function for computing captum attributions
    """
    return algo.attribute(inputs, **kwargs)

```

Pretrained Model

For all of our image generation experiments, we will start with a convolutional neural network which was pretrained to perform image classification on ImageNet. We can use any model here, but for the purposes of this assignment we will use SqueezeNet, which achieves accuracies comparable to AlexNet but with a significantly reduced parameter count and computational complexity.

Using SqueezeNet rather than AlexNet or VGG or ResNet means that we can easily perform all the experiments in this notebook on a CPU machine. You are encouraged to use a larger model to finish the rest of the experiments if GPU resources are not a problem for you, but please highlight the backbone network you use in your implementation if you do it.

Switching a backbone network is quite easy in pytorch. You can refer to [torchvision model zoos \(<https://github.com/pytorch/vision/tree/v0.2.1/torchvision/models>\)](https://github.com/pytorch/vision/tree/v0.2.1/torchvision/models) for more information.

- Iandola et al, "SqueezeNet: AlexNet-level accuracy with 50x fewer parameters and < 0.5MB model size", arXiv 2016

```

In [3]: # Download and load the pretrained SqueezeNet model.
model = torchvision.models.squeezeNet1_1(pretrained=True)

# We don't want to train the model, so tell PyTorch not to compute gradients
# with respect to model parameters.
for param in model.parameters():
    param.requires_grad = False

```

Load some ImageNet images

If you have not execute the downloading script. Here is a reminder that you have to do it now. We have provided a few example images from the validation set of the ImageNet ILSVRC 2012 Classification dataset.

To download these images run

```
cd cs7643/datasets/  
bash get_imagenet_val.sh
```

Since they come from the validation set, our pretrained model did not see these images during training.

Run the following cell to visualize some of these images, along with their ground-truth labels.

```
In [4]: from cs7643.data_utils import load_imagenet_val  
X, y, class_names = load_imagenet_val(num=5)  
plt.figure(figsize=(12, 6))  
for i in range(5):  
    plt.subplot(1, 5, i + 1)  
    plt.imshow(X[i])  
    plt.title(class_names[y[i]])  
    plt.axis('off')  
plt.gcf().tight_layout()
```



Saliency Maps (10 pts)

Using this pretrained model, we will compute class saliency maps as described in the paper:

[1] Karen Simonyan, Andrea Vedaldi, and Andrew Zisserman, "Deep Inside Convolutional Networks: Visualising Image Classification Models and Saliency Maps", ICLR Workshop 2014, (<https://arxiv.org/abs/1312.6034>)

We will also review this paper in the paper presentation.

A **saliency map** tells us the degree to which each pixel in the image affects the classification score for that image. To compute it, we compute the gradient of the unnormalized score corresponding to the correct class (which is a scalar) with respect to the pixels of the image. If the image has shape $(3, H, W)$ then this gradient will also have shape $(3, H, W)$; for each pixel in the image, this gradient tells us the amount by which the classification score will change if the pixel changes by a small amount. To compute the saliency map, we take the absolute value of this gradient, then take the maximum value over the 3 input channels; the final saliency map thus has shape (H, W) and all entries are nonnegative.

Hint: PyTorch gather method

Recall when you need to select one element from each row of a matrix; if s is a numpy array of shape (N, C) and y is a numpy array of shape $(N,)$ containing integers $0 \leq y[i] < C$, then $s[np.arange(N), y]$ is a numpy array of shape $(N,)$ which selects one element from each element in s using the indices in y .

In PyTorch you can perform the same operation using the `gather()` method. If s is a PyTorch Tensor or Variable of shape (N, C) and y is a PyTorch Tensor or Variable of shape $(N,)$ containing longs in the range $0 \leq y[i] < C$, then

```
s.gather(1, y.view(-1, 1)).squeeze()
```

will be a PyTorch Tensor (or Variable) of shape $(N,)$ containing one entry from each row of s , selected according to the indices in y .

run the following cell to see an example.

You can also read the documentation for [the gather method](http://pytorch.org/docs/torch.html#torch.gather) (<http://pytorch.org/docs/torch.html#torch.gather>) and [the squeeze method](http://pytorch.org/docs/torch.html#torch.squeeze) (<http://pytorch.org/docs/torch.html#torch.squeeze>).

```
In [5]: # Example of using gather to select one entry from each row in PyTorch.  
# I added the max_indices and gather code.  
def gather_example():  
    N, C = 4, 5  
    s = torch.randn(N, C)  
    indices = torch.argmax(s, dim=1)  
    print(f" max indices {indices.view(-1, 1).shape}")  
    print(f" gradient {s.shape}")  
    print(s.gather(1, indices.view(-1, 1)).shape)  
  
    s = torch.randn(5, 3, 234, 234)  
    indices = torch.argmax(s, dim=1)  
    y = torch.LongTensor([1, 2, 1, 3])  
    print(f" max indices {indices.shape}")  
    print(f" gradient {s.shape}")  
    (a, b, c) = indices.shape  
    print(s.gather(1, indices.view(a, -1, b, c)).shape)  
    # for i in range(5):  
    #     print(f" max indices {indices[i].shape}")  
    #     print(f" gradient {s[i].shape}")  
    #     print(s[i].gather(1, indices[i]))  
gather_example()  
  
max indices torch.Size([4, 1])  
gradient torch.Size([4, 5])  
torch.Size([4, 1])  
max indices torch.Size([5, 234, 234])  
gradient torch.Size([5, 3, 234, 234])  
torch.Size([5, 1, 234, 234])
```

```
In [6]: def compute_saliency_maps(X, y, model):
    """
    Compute a class saliency map using the model for images X and labels y.

    Input:
    - X: Input images; Tensor of shape (N, 3, H, W)
    - y: Labels for X; LongTensor of shape (N,)
    - model: A pretrained CNN that will be used to compute the saliency map.

    Returns:
    - saliency: A Tensor of shape (N, H, W) giving the saliency maps for the input
    images.
    """
    # Make sure the model is in "test" mode
    model.eval()

    # Wrap the input tensors in Variables
    X_var = Variable(X, requires_grad=True)
    y_var = Variable(y, requires_grad=False)
    saliency = None

    lam = 1e3 # This is the regularization parameter when you need it

    ##### TODO: Implement this function. Perform a forward and backward pass through #
    # the model to compute the gradient of the correct class score with respect #
    # to each input image. You first want to compute the loss over the correct   #
    # scores, and then compute the gradients with a backward pass.                 #
    ##### 1. compute scores with a forward pass
    scores_all_classes = model.forward(X_var)

    # 1.5 get scores for specific class label
    scores = scores_all_classes.gather(1, y_var.view(-1, 1)).squeeze()
    print(list(scores.shape))
    print(scores)
    print(y)

    # 2. backprop to find gradScores w.r.t Image. i.e. dScore/dX
    scores.backward(torch.ones_like(scores)) #do the backpass
    gradient = X_var.grad #this is w in the paper
    abs_gradient = gradient.abs()

    # 3. use gradient to pick i,j pixel index.
    # self-hint(?): use gather to take max across channels.
    max_indices = torch.argmax(abs_gradient, dim=1)

    print(f"gradient shape: {abs_gradient.shape}")
    print(f"max_indices shape (should be gradShape.drop(1)): {max_indices.shape}")

    (a, b, c) = max_indices.shape
    saliency = abs_gradient.gather(1, max_indices.view(a, -1, b, c)).squeeze()
    print(f"gradient shape: {abs_gradient.shape}")
    print(f"max_indices shape (should be gradShape.drop(1)): {max_indices.shape}")
    print(f"saliency shape: {saliency.shape}")
    print(f"y_var: {y}")

    ##### END OF YOUR CODE #####
    return saliency
```

Once you have completed the implementation in the cell above, run the following to visualize some class saliency maps on our example images from the ImageNet validation set. You can compare to the figure 2 in the referred paper as a comparison for your results.

```
In [7]: def show_saliency_maps(X, y):
    # Convert X and y from numpy arrays to Torch Tensors
    X_tensor = torch.cat([preprocess(Imagen.fromarray(x)) for x in X], dim=0)
    print(y)
    y_tensor = torch.LongTensor(y)

    # Compute saliency maps for images in X
    saliency = compute_saliency_maps(X_tensor, y_tensor, model)
    # Convert the saliency map from Torch Tensor to numpy array and show images
    # and saliency maps together.
    saliency = saliency.numpy()

    N = X.shape[0]
    for i in range(N):
        plt.subplot(2, N, i + 1)
        print(f"X[{i}]: {X[i].shape}")
        plt.imshow(X[i])
        plt.axis('off')
        plt.title(class_names[y[i]])
        plt.subplot(2, N, N + i + 1)
        print(f"saliency[{i}]: {saliency[i].shape}")
        plt.imshow(saliency[i], cmap=plt.cm.gray)
        plt.axis('off')
        plt.gcf().set_size_inches(12, 5)
    plt.show()

show_saliency_maps(X, y)
```

```
[958 85 244 182 294]
[5]
tensor([24.1313, 25.1475, 38.8825, 25.4514, 30.2723],
      grad_fn=<SqueezeBackward0>)
tensor([958, 85, 244, 182, 294])
gradient shape: torch.Size([5, 3, 224, 224])
max_indices shape (should be gradShape.drop(1)): torch.Size([5, 224, 224])
gradient shape: torch.Size([5, 3, 224, 224])
max_indices shape (should be gradshape.drop(1)): torch.Size([5, 224, 224])
saliency shape: torch.Size([5, 224, 224])
y_var: tensor([958, 85, 244, 182, 294])
X[0]: (224, 224, 3)
saliency[0]: (224, 224)
X[1]: (224, 224, 3)
saliency[1]: (224, 224)
X[2]: (224, 224, 3)
saliency[2]: (224, 224)
X[3]: (224, 224, 3)
saliency[3]: (224, 224)
X[4]: (224, 224, 3)
saliency[4]: (224, 224)
```



Captum (1 pt)

As a final step, we will show you how simple it is to use Saliency Maps using Captum instead.

Captum offers a number of attribution algorithms for PyTorch models that are very easy to use. Let's apply those algorithms to our model and the five images that we loaded from imagenet.

We have created a generic helper visualization function that will allow you to visualize and compare the attributions of different algorithms next to each other for each image. (`compute_attributions` and `visualize_attr_maps`, found in the helper functions section)

Let's apply the saliency maps attribution algorithm on the images and observe how the attributions differ.

To do so we need to import those algorithms from the Captum library, create instances of the corresponding algorithms, call our `compute_attribute` function on these instances, and finally visualize using our helper function.

We have included an example of how we can apply a number of attribution algorithms on our model and images.

Feel free to try other algorithms and compare their results.

Please, be aware that some of the algorithms, such as perturbation algorithms, might take longer to execute and might have higher memory requirements. In case you run into OOM issues for integrated gradients you can try to reduce the number of integral approximation steps (`n_steps`) or set the value of `internal_batch_size` input argument to a small number. The value of `ablations_per_eval` or `perturbation_per_eval` can be adjusted also for all perturbation algorithms in order to reduce memory footprint. This might lead to a slower execution runtime, however it will help to avoid OOM.

```
In [8]: from captum.attr import IntegratedGradients, Saliency
```

```
# Convert X and y from numpy arrays to Torch Tensors
X_tensor = torch.cat([preprocess(Image.fromarray(x)) for x in X], dim=0)
y_tensor = torch.LongTensor(y)

# Computing Integrated Gradient
int_grads = IntegratedGradients(model)
attr_ig = compute_attributions(int_grads, X_tensor, target=y_tensor, n_steps=10)

#####
# TODO: Compute/Visualize Saliency using captum.
#####
sal_grads = Saliency(model)
attr_sal = compute_attributions(sal_grads, X_tensor, target=y_tensor)
visualize_attr_maps([attr_ig, attr_sal], ['Integrated Gradients', 'Saliency'])

#####
# END OF YOUR CODE
#####

#####
```


```
/Users/reagangan/captum/captum/attr/_utils/gradient.py:32: UserWarning: Input Tensor 0 did not already require gradients, required_grads has been set automatically.
```

```
"required_grads has been set automatically." % index
```


```
attributions shape: torch.Size([3, 224, 224])
```



Original Image

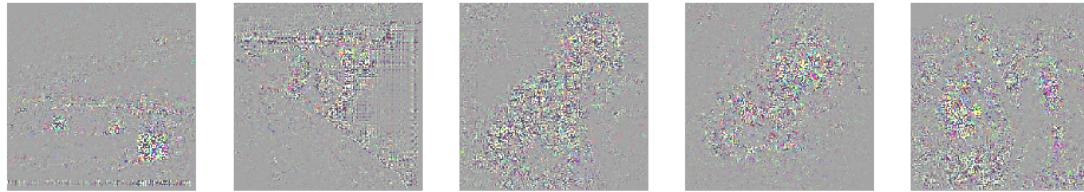

Integrated Gradients

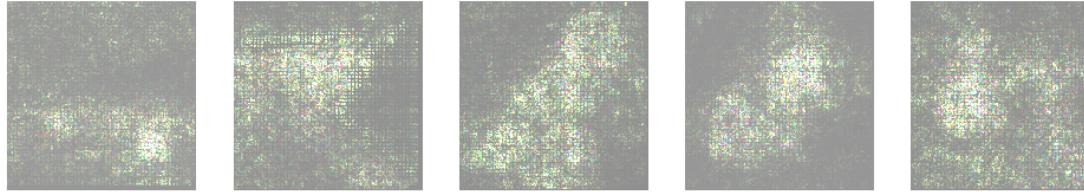

Saliency

GradCAM (10 pts)

GradCAM (which stands for Gradient Class Activation Mapping) is a technique that tells us where a convolutional network is looking when it is making a decision on a given input image. There are three main stages to it:

- Guided Backprop (Changing ReLU Backprop Layer, <https://arxiv.org/abs/1412.6806> (<https://arxiv.org/abs/1412.6806>))
- GradCAM (Manipulating gradients at the last convolutional layer, <https://arxiv.org/abs/1610.02391> (<https://arxiv.org/abs/1610.02391>))
- Guided GradCAM (Pointwise multiplication of above stages)

In this section, you will be implementing these three stages to recreate the full GradCAM pipeline. At each stage, you can visualize what the current output is to see exactly what is happening.

We begin with Guided Backprop. We encourage you to read the paper above first, to gain an understanding of what Guided Backprop is trying to do. From the paper, we have that:

- The 'deconvolution' is equivalent to a backward pass through the network, except that when propagating through a nonlinearity, its gradient is solely computed based on the top gradient signal, ignoring the bottom input. In case of the ReLU nonlinearity this amounts to setting to zero certain entries based on the top gradient. We propose to combine these two methods: rather than masking out values corresponding to negative entries of the top gradient ('deconvnet') or bottom data (backpropagation), we mask out the values for which at least one of these values is negative.

```
In [9]: # FOR THIS SECTION ONLY, we need to use gradients. We introduce a new model we will use explicitly for GradCAM for this.  
gc_model = torchvision.models.squeezenet1_1(pretrained=True)  
for param in gc_model.parameters():  
    param.requires_grad = True
```

```
In [10]: class CustomReLU(TorchFunc):  
    """  
    Define the custom change to the standard ReLU function necessary to perform guided backpropagation.  
    We have already implemented the forward pass for you, as this is the same as a normal ReLU function.  
    """  
  
    @staticmethod  
    def forward(self, x):  
        #print((x > 0).type_as(x))  
        output = torch.addcmul(torch.zeros(x.size()), x, (x > 0).type_as(x))  
        self.save_for_backward(x, output)  
        # print(self.saved_tensors)  
        return output  
  
    @staticmethod  
    def backward(self, y):  
        #####  
        # TODO: Implement this function. Perform a backwards pass as described in      #  
        # paper above. Note: torch.addcmul might be useful, and you can access      #  
        # the input/output from the forward pass with self.saved_tensors.          #  
        #####  
        # print(f"forward io: {self.saved_tensors}")  
        forwardIn, forwardOut = self.saved_tensors  
        # print(f"seven: {seven}")  
        bottomMask = (forwardIn > 0).type_as(forwardIn)  
        topMask = (y > 0).type_as(y)  
        assert(forwardIn.size() == y.size())  
        applyBottomMask = torch.addcmul(torch.zeros(forwardIn.size()), y, bottomMask)  
        applyTopMask = torch.addcmul(torch.zeros(forwardIn.size()), applyBottomMask, topMask)  
  
        superMask = torch.addcmul(torch.zeros(bottomMask.size()), bottomMask, topMask)  
        superOutput = torch.addcmul(torch.zeros(bottomMask.size()), y, superMask)  
        # assert(torch.eq(superOutput, applyTopMask))  
        assert(torch.all(torch.eq(superOutput, applyTopMask)))  
        return applyTopMask  
  
        #####  
        #           END OF YOUR CODE           #  
        #####
```

To test your implementation, run the code below.

```
In [11]: for idx, module in gc_model.features._modules.items():
    if module.__class__.__name__ == 'ReLU':
        gc_model.features._modules[idx] = CustomReLU.apply

def guided_backprop(X_tensor,y_tensor):
    ##### Implement guided backprop as described in paper.
    # (Hint): Now that you have implemented the custom ReLU function, this
    # method will be similar to a single training iteration.
    #
    print(f'y tensor: {y_tensor}')
    print(f'ones_like type: {torch.ones_like(y_tensor).float()}')
    scores = gc_model.forward(X_tensor).gather(1, y_tensor.view(-1, 1)).squeeze()
    scores.backward(torch.ones_like(y_tensor).float())
    gradient1 = X_tensor.grad.permute(0,2,3,1)

    scores = gc_model.forward(X_tensor)
    #
    print(scores.shape)
    init_grad = torch.zeros_like(scores).float()
    init_grad[list(range(5)), y_tensor] = 1.0
    #
    print(torch.argmax(init_grad[0]))
    #
    print(y_tensor)
    scores.backward(init_grad)
    gradient = X_tensor.grad
    print(f'gradient shape: {gradient.shape}')
    gradient = gradient.permute(0,2,3,1) #do not use .view, which changes ordering of elements.
    print(f'gradient shape: {gradient.shape}')
    #
    print(torch.ones_like(gradient) == (gradient >= 0).type_as(gradient))
    #
    print(gradient)
    assert(torch.all(torch.eq(gradient, gradient1)))
    #
    return gradient1
#
return gradient #this is slightly better than gradient1. not sure if my eyes are bad since they are equal.
#####
# END OF YOUR CODE
#####


X_tensor = torch.cat([preprocess(Image.fromarray(x)) for x in X], dim=0).requires_grad_(True)
y_tensor = torch.LongTensor(y)
gbp_result = guided_backprop(X_tensor,y_tensor)

plt.figure(figsize=(24, 24))
for i in range(gbp_result.shape[0]):
    plt.subplot(1, 5, i + 1)
    c, w, h = gbp_result[i].shape
    #
    print(gbp_result[i].shape)
    #
    plt.imshow(gbp_result[i].view(w, h, c))
    plt.title(class_names[y[i]])
    plt.axis('off')
plt.gcf().tight_layout()
```

y tensor: tensor([958, 85, 244, 182, 294])
 ones_like type: tensor([1., 1., 1., 1., 1.])

Clipping input data to the valid range for imshow with RGB data ([0..1] for floats or [0..255] for integers).
 Clipping input data to the valid range for imshow with RGB data ([0..1] for floats or [0..255] for integers).
 Clipping input data to the valid range for imshow with RGB data ([0..1] for floats or [0..255] for integers).
 Clipping input data to the valid range for imshow with RGB data ([0..1] for floats or [0..255] for integers).
 Clipping input data to the valid range for imshow with RGB data ([0..1] for floats or [0..255] for integers).

gradient shape: torch.Size([5, 3, 224, 224])
 gradient shape: torch.Size([5, 224, 224, 3])

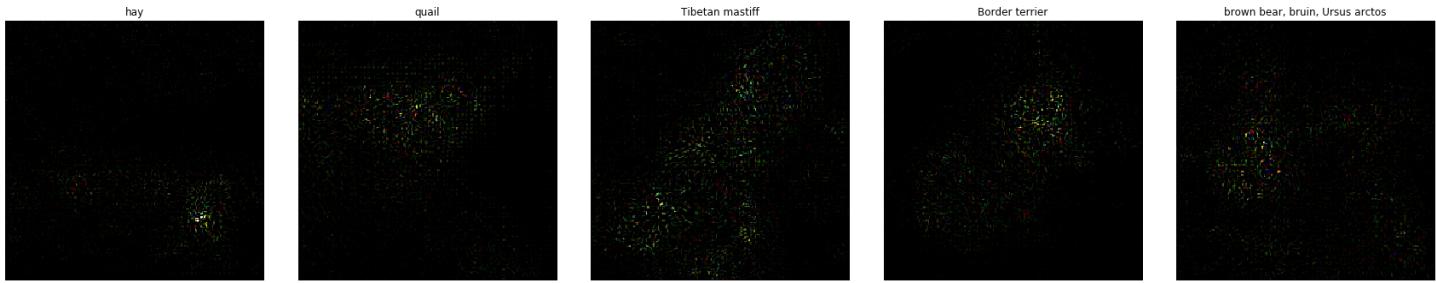

Next, we can implement GradCAM. We have given you which module(=layer) that we need to capture gradients from, which you can see in `conv_module` variable below - feel free to play around with this to see visualizations for different layers, but in your final submission keep it to what we gave you. We have already provided a gradient and activation hook for you, and the gradient value of the module you choose will be stored in the `gradient_value` variable (similarly `activation_value` will hold the layer activation). The rest of the implementation of GradCAM is up to you.

```
In [12]: # Reset model from any changes made during Guided Backprop
gc_model = torchvision.models.squeezenet1_1(pretrained=True)
for param in gc_model.parameters():
    param.requires_grad = True
```

```
In [13]: conv_module = gc_model.features[12]

gradient_value = None # Stores gradient of the module you chose above during a backwards pass.
activation_value = None # Stores the activation of the module you chose above during a forwards pass.

def gradient_hook(a,b,gradient):
    global gradient_value
    gradient_value = gradient[0]

def activation_hook(a,b,activation):
    global activation_value
    activation_value = activation

conv_module.register_forward_hook(activation_hook)
conv_module.register_backward_hook(gradient_hook)
```

Out[13]: <torch.utils.hooks.RemovableHandle at 0x12e2b35f8>

```
In [14]: def grad_cam(X_tensor, y_tensor):
    #####  

    # TODO: Implement GradCam as described in paper. #
    #####  

    cam = None

    #forward pass image. activation hook should've saved desired activation map into activation_value.
    scores = gc_model.forward(X_tensor)

    #prep backward: zero out unwanted classes in gradient
    init_grad = torch.zeros_like(scores).float()
    init_grad[list(range(y_tensor.shape[0])), y_tensor] = 1.0

    #backpropagate. gradient hook should've saved dScore/dActivationMap into gradient_value.
    scores.backward(init_grad)
    #      dScoreDActivation = gradient_value

    #alpha: neuron importance weights
    alpha = torch.mean(gradient_value, (2,3))
    print(f"alpha size: {alpha.shape}")
    print(f"alpha: {alpha}")
    print(f"gradient_value size: {gradient_value.shape}")
    #      print(f"gradient_value: {gradient_value}")

    #cam: ReLU(sum[k](alpha[k] * grad[k]))
    # [WRONG] in this case there is only 1 k value ??????
    # [GOOD] or is it k in [0,512] since activation_value size: torch.Size([5, 512, 13, 13])
    print(f"activation_value size: {activation_value.shape}")
    cam = alpha[:, :, None, None] * activation_value
    cam = torch.sum(cam, axis=1)
    print(f"cam size: {cam.shape}")

    cam = torch.addcmul(torch.zeros(cam.size()), cam, (cam > 0).type_as(cam)) #ReLU
    print(f"image size: {X_tensor.shape}")
    print(f"cam size: {cam.shape}")
    cam = cam.detach().numpy() #code below requires numpy
    #####  

    #      END OF YOUR CODE #
    #####

    # Rescale GradCam output to fit image.
    cam_scaled = []
    for i in range(cam.shape[0]):
        cam_scaled.append(np.array(Image.fromarray(cam[i]).resize(X_tensor[i,0,:,:].shape)))
    cam = np.array(cam_scaled)
    cam -= np.min(cam)
    cam /= np.max(cam)
    return cam
```


To test your implementation, run the code below.

```
In [15]: X_tensor = torch.cat([preprocess(Image.fromarray(x)) for x in X], dim=0).requires_grad_(True)
y_tensor = torch.LongTensor(y)
gradcam_result = grad_cam(X_tensor, y_tensor)

plt.figure(figsize=(24, 24))
for i in range(gradcam_result.shape[0]):
    gradcam_val = gradcam_result[i]
    img = X[i] + (matplotlib.cm.jet(gradcam_val)[:, :, :3]*255)
    img = img / np.max(img)
    plt.subplot(1, 5, i + 1)
    plt.imshow(img)
    plt.title(class_names[y[i]])
    plt.axis('off')
plt.gcf().tight_layout()

alpha size: torch.Size([5, 512])
alpha: tensor([[ 9.3862e-05, -3.7522e-05,  6.3260e-05,  ...,  2.9678e-04,
                1.1335e-04,  5.9996e-05],
               [ 3.8974e-05, -2.4997e-04,  2.7565e-05,  ..., -3.6877e-05,
                1.4532e-04, -2.4953e-04],
               [-3.5052e-04, -6.6962e-05, -3.5692e-05,  ..., -1.7163e-04,
                -2.0609e-04,  3.9557e-04],
               [ 4.8211e-04, -1.9298e-04,  1.1444e-04,  ...,  2.6151e-04,
                1.2922e-04,  2.1928e-04],
               [-3.7134e-04, -2.4911e-04, -2.6240e-04,  ..., -2.8875e-04,
                -2.1763e-04, -2.0061e-05]])

gradient_value size: torch.Size([5, 512, 13, 13])
activation_value size: torch.Size([5, 512, 13, 13])
cam size: torch.Size([5, 13, 13])
image size: torch.Size([5, 3, 224, 224])
cam size: torch.Size([5, 13, 13])
```

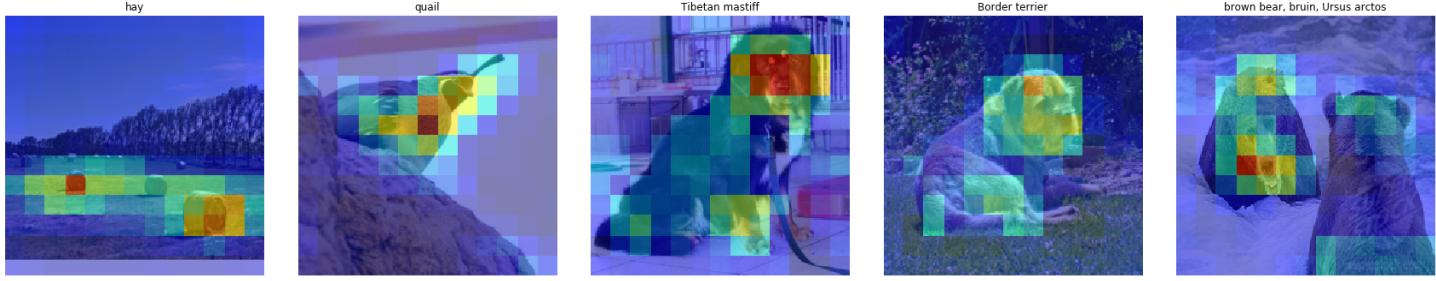

As a final step, we can combine GradCam and Guided Backprop to get Guided GradCam.

```
In [16]: X_tensor = torch.cat([preprocess(Image.fromarray(x)) for x in X], dim=0).requires_grad_(True)
y_tensor = torch.LongTensor(y)
gradcam_result = grad_cam(X_tensor, y_tensor)
gbp_result = guided_backprop(X_tensor, y_tensor)
print(type(gradcam_result))
print(type(gbp_result))
# assert(False)

plt.figure(figsize=(24, 24))
for i in range(gradcam_result.shape[0]):
    gbp_val = gbp_result[i]
    gbp_val /= torch.max(gbp_val)
    gradcam_val = (matplotlib.cm.jet(gradcam_result[i])[:, :, :3]*255)


#####
# TODO: Pointwise multiplication and normalization of the gradcam and guided #
#      backprop results (2 lines)                                              #
#####
gradcam_val = torch.from_numpy(gradcam_val)
img = gradcam_val * gbp_val #pointwise multiplication
img /= torch.max(img) #normalized
print("differences btw TA and mine are likely come from diff in GradCam heatmaps.")
# print("hello")
# print(gradcam_val.shape); print(type(gradcam_val))
# print(gbp_val.shape); print(type(gbp_val))
# print(f"img dim: {img.shape}")
#####
#           END OF YOUR CODE                                                 #
#####

img = np.expand_dims(img.permute(2, 0, 1),axis=0)#originally: img.transpose(2, 0, 1)
img = np.float32(img)
img = torch.from_numpy(img)
img = deprocess(img)
plt.subplot(1, 5, i + 1)
plt.imshow(img)
plt.title(class_names[y[i]])
plt.axis('off')
plt.gcf().tight_layout()

alpha size: torch.Size([5, 512])
alpha: tensor([[ 9.1515e-05, -3.3862e-05,  5.7375e-05,  ...,  3.4427e-04,
                1.1777e-04,  6.1617e-05],
               [ 4.4631e-05, -1.9032e-04,  3.2914e-05,  ..., -3.7946e-05,
                1.8517e-04, -2.1581e-04],
               [-3.6628e-04, -7.0948e-05, -4.0033e-05,  ..., -1.6166e-04,
                -2.1363e-04,  3.3037e-04],
               [ 4.4332e-04, -2.1099e-04,  1.1184e-04,  ...,  2.6752e-04,
                1.2144e-04,  1.8830e-04],
               [-3.5254e-04, -2.4595e-04, -2.3428e-04,  ..., -3.1570e-04,
                -2.3795e-04, -1.9247e-05]])
```

gradient_value size: torch.Size([5, 512, 13, 13])
activation_value size: torch.Size([5, 512, 13, 13])
cam size: torch.Size([5, 13, 13])
image size: torch.Size([5, 3, 224, 224])
cam size: torch.Size([5, 13, 13])
y tensor: tensor([958, 85, 244, 182, 294])
ones_like type: tensor([1., 1., 1., 1., 1.])
gradient shape: torch.Size([5, 3, 224, 224])
gradient shape: torch.size([5, 224, 224, 3])
<class 'numpy.ndarray'>
<class 'torch.Tensor'>

differences btw TA and mine are likely come from diff in GradCam heatmaps.
differences btw TA and mine are likely come from diff in GradCam heatmaps.
differences btw TA and mine are likely come from diff in GradCam heatmaps.
differences btw TA and mine are likely come from diff in GradCam heatmaps.
differences btw TA and mine are likely come from diff in GradCam heatmaps.

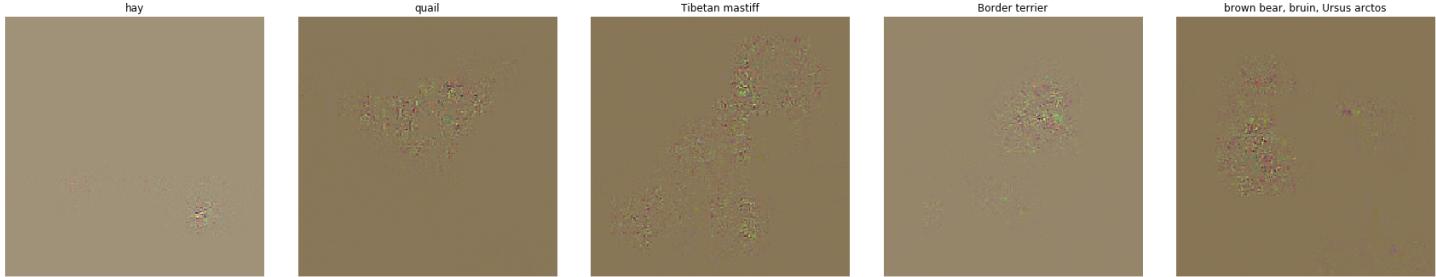

Captum (1 pt)

As a final step, implement GradCam and GuidedBackprop exactly as you did for saliency maps above and compare your visualizations with the ones using Captum (note: **These visualization will look significantly different, as Captum has different pre/post processing steps for images**).

```
In [17]: from captum.attr import GuidedGradCam, GuidedBackprop
```

```
# Convert X and y from numpy arrays to Torch Tensors
X_tensor = torch.cat([preprocess(Image.fromarray(x)) for x in X], dim=0)
y_tensor = torch.LongTensor(y)

#####
# TODO: Compute/Visualize GuidedBackprop and GradCAM as well. #
#####

gdc_grads = GuidedGradCam(gc_model, conv_module)
attr_gdc = compute_attributions(gdc_grads, X_tensor, target=y_tensor)

gbp_grads = GuidedBackprop(gc_model)
attr_gbp = compute_attributions(gbp_grads, X_tensor, target=y_tensor)


print(type(attr_gdc))
print(attr_gdc.shape)
visualize_attr_maps([attr_gdc, attr_gbp], ['GuidedGradCam', 'GuidedBackprop'])
# visualize_attr_maps([], [ '' ])
#####
# END OF YOUR CODE #
#####
```

```
/Users/reagangan/captum/captum/attr/_core/guided_backprop_deconvnet.py:58: UserWarning: Setting backward hooks on ReLU activations. The hooks will be removed after the attribution is finished
  "Setting backward hooks on ReLU activations."
```


```
<class 'torch.Tensor'>
torch.Size([5, 3, 224, 224])
attribution shape: torch.Size([3, 224, 224])
```



Original Image

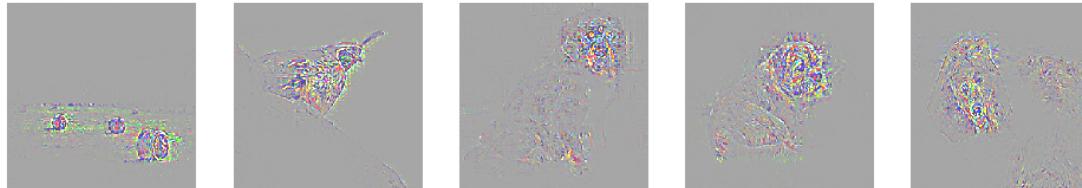

GuidedGradCam

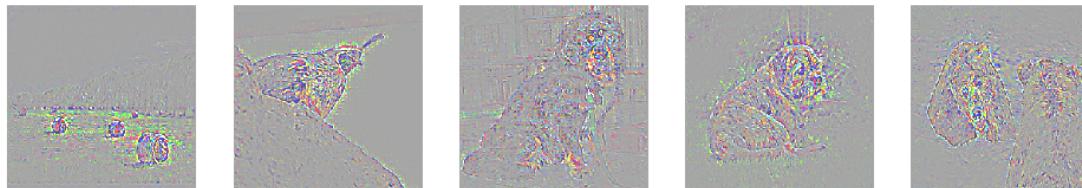

GuidedBackprop

Visualizing layers and neurons using Captum (3 pts)

Let's try to attribute to a selected layer and visualize the attribution for any selected channel. We can choose to change the layers and channels and observe how the attribution changes.

Consider also using https://captum.ai/api_modules/captum/attr_utils/attribution.html#LayerAttribution.interpolate (https://captum.ai/api_modules/captum/attr_utils/attribution.html#LayerAttribution.interpolate) to interpolate layer dimensions to given input dimensions.

Please, be aware of the memory limitation and how you can overcome those using the techniques described in the previous section.

```
In [18]: from captum.attr import LayerActivation, LayerConductance, LayerGradCam
layer = model.features[3]

attr1 = compute_attributions(LayerConductance(model, layer), X_tensor, target=y_tensor)
attr2 = compute_attributions(LayerGradCam(model, layer), X_tensor, target=y_tensor)
print(captum.__version__)
```

0.2.0

```
In [19]: from captum.attr import LayerActivation, LayerConductance, LayerGradCam

# Try out different layers and see observe how the attributions change
layer = model.features[3]

layer_act = LayerActivation(model, layer)
layer_act_attr = compute_attributions(layer_act, x_tensor)
layer_act_attr_sum = layer_act_attr.mean(axis=1, keepdim=True)
#####
# TODO: Visualize Individual Layer Gradcam and Layer Conductance (similar      #
# to what we did for the other captum sections, using our helper methods),      #
# but with some preprocessing calculations.                                     #
#####

from captum.attr._utils.attribution import LayerAttribution
interpolate = LayerAttribution.interpolate

def adjustShape(attr):
    print(layer_act_attr_sum.shape)
    attr = interpolate(attr, (224, 224))
    print(attr.shape)
    attr = attr.permute(0, 2, 3, 1)
    print(attr.shape)
    attr = interpolate(attr, (224, 3))
    print(attr.shape)
    attr = attr.permute(0, 3, 1, 2)
    print(attr.shape)
    return attr

attr0 = layer_act_attr_sum
print(attr0.shape)
# print(attr1.shape)
# print(attr2.shape)
# attr0 = adjustShape(layer_act_attr_sum)
# attr1 = adjustShape(attr1)
# # attr2 = adjustShape(attr2)
# print(attr0.squeeze().shape)
# print(attr1.shape)
# print(attr2.shape)

# visualize_attr_maps([attr0], ['LayerActivation'], attr_preprocess=lambda attr: attr[0,:,:].detach().numpy())
visualize_attr_maps([attr0, attr2, attr1], ['LayerActivation', 'LayerGradCam', 'LayerConductance'], attr_preprocess=lambda attr: attr[0,:,:].detach().numpy())
#####
#           END OF YOUR CODE
#####
```

hay	quail	Tibetan mastiff	Border terrier	brown bear, bruin, Ursus arctos	
					Original Image
					LayerActivation
					LayerGradCam
					LayerConductance

Fooling Images (10 pts)

We can also use the similar concept of image gradients to study the stability of the network. Consider a state-of-the-art deep neural network that generalizes well on an object recognition task. We expect such network to be robust to small perturbations of its input, because small perturbation cannot change the object category of an image. However, [2] find that applying an imperceptible non-random perturbation to a test image, it is possible to arbitrarily change the network's prediction.

[2] Szegedy et al., "Intriguing properties of neural networks", ICLR 2014 (<https://arxiv.org/abs/1312.6199>)

Given an image and a target class, we can perform **gradient ascent** over the image to maximize the target class, stopping when the network classifies the image as the target class. We term the so perturbed examples “adversarial examples”.

Read the paper, and then implement the following function to generate fooling images.

```
In [20]: def make_fooling_image(X, target_y, model):
    """
    Generate a fooling image that is close to X, but that the model classifies
    as target_y.

    Inputs:
    - X: Input image; Tensor of shape (1, 3, 224, 224)
    - target_y: An integer in the range [0, 1000)
    - model: A pretrained CNN

    Returns:
    - X_fooling: An image that is close to X, but that is classified as target_y
    by the model.
    """
    model.eval()

    # Initialize our fooling image to the input image, and wrap it in a Variable.
    X_fooling = X.clone()
    X_fooling_var = Variable(X_fooling, requires_grad=True)

    # We will fix these parameters for everyone so that there will be
    # comparable outputs

    learning_rate = 1 # learning rate is 1. Note. changed the value from 10 to 1 to match comment.
    max_iter = 100 # maximum number of iterations

    #for it in range(max_iter):
    not_fooled = True
    it = 0
    while it < max_iter and not_fooled:
        #####
        # TODO: Generate a fooling image X_fooling that the model will classify as #
        # the class target_y. You should perform gradient ascent on the score of the #
        # target class, stopping when the model is fooled. #
        # When computing an update step, first normalize the gradient: #
        #   dX = learning_rate * g / ||g||_2 #
        # Inside of this loop, write the update rule. #
        # #
        # HINT: #
        # You can print your progress (current prediction and its confidence score) # #
        # over iterations to check your gradient ascent progress. #
        #####
        scores = model.forward(X_fooling_var)
        init_grad = torch.zeros_like(scores).float()
        init_grad[0], target_y = 1.0
        scores.backward(init_grad)
        #
        #print(f"scores shape: {scores.shape}")
        grad = X_fooling_var.grad
        X_fooling_var.data += learning_rate * grad / grad.norm(2)

        it += 1
        if target_y == scores.data.max(1)[1][0]:
            not_fooled = False
            print(f"early stop at iteration: {it - 1}")
        #####
        #           END OF YOUR CODE #
        #####
        X_fooling = X_fooling_var.data
    return X_fooling
```

Now you can run the following cell to **generate a fooling image**. You will see the message 'Fooled the model' when you succeed.

```
In [21]: idx = 0
target_y = 6 # target label. Change to a different label to see the difference.

X_tensor = torch.cat([preprocess(Image.fromarray(x)) for x in X], dim=0)
X_fooling = make_fooling_image(X_tensor[idx:idx+1], target_y, model)

scores = model(Variable(X_fooling))

if target_y == scores.data.max(1)[1][0]:
    print('Fooled the model!')
else:
    print('The model is not fooled!')

early stop at iteration: 10
Fooled the model!
```

After generating a fooling image, run the following cell to visualize the original image, the fooling image, as well as the difference between them.

```
In [22]: X_fooling_np = deprocess(X_fooling.clone())
X_fooling_np = np.asarray(X_fooling_np).astype(np.uint8)

plt.subplot(1, 4, 1)
plt.imshow(X[idx])
plt.title(class_names[y[idx]])
plt.axis('off')

plt.subplot(1, 4, 2)
plt.imshow(X_fooling_np)
plt.title(class_names[target_y])
plt.axis('off')

plt.subplot(1, 4, 3)
X_pre = preprocess(Image.fromarray(X[idx]))
diff = np.asarray(deprocess(X_fooling - X_pre, should_rescale=False))
plt.imshow(diff)
plt.title('Difference')
plt.axis('off')

plt.subplot(1, 4, 4)
diff = np.asarray(deprocess(10 * (X_fooling - X_pre), should_rescale=False))
plt.imshow(diff)
plt.title('Magnified difference (10x)')
plt.axis('off')

plt.gcf().set_size_inches(12, 5)
plt.show()
```



Class visualization (10 pts)

By starting with a random noise image and performing gradient ascent on a target class, we can generate an image that the network will recognize as the target class. This idea was first presented in [1]; [3] extended this idea by suggesting several regularization techniques that can improve the quality of the generated image.

Concretely, let I be an image and let y be a target class. Let $s_y(I)$ be the score that a convolutional network assigns to the image I for class y ; note that these are raw unnormalized scores, not class probabilities. We wish to generate an image I^* that achieves a high score for the class y by solving the problem

$$I^* = \arg \max_I s_y(I) - R(I)$$

where R is a (possibly implicit) regularizer (note the sign of $R(I)$ in the argmax: we want to minimize this regularization term). We can solve this optimization problem using gradient ascent, computing gradients with respect to the generated image. We will use (explicit) L2 regularization of the form

$$R(I) = \lambda \|I\|_2^2$$

and implicit regularization as suggested by [3] by periodically blurring the generated image. We can solve this problem using gradient ascent on the generated image.

[1] Karen Simonyan, Andrea Vedaldi, and Andrew Zisserman. "Deep Inside Convolutional Networks: Visualising Image Classification Models and Saliency Maps". ICLR Workshop 2014 (<https://arxiv.org/abs/1312.6034>).

[3] Yosinski et al. "Understanding Neural Networks Through Deep Visualization", ICML 2015 Deep Learning Workshop (http://yosinski.com/media/papers/Yosinski_2015_ICML_DL_Understanding_Neural_Networks_Through_Deep_Visualization.pdf)

In the cell below, complete the implementation of the `create_class_visualization` function.

```
In [23]: def jitter(X, ox, oy):
    """
    Helper function to randomly jitter an image.

    Inputs
    - X: PyTorch Tensor of shape (N, C, H, W)
    - ox, oy: Integers giving number of pixels to jitter along W and H axes

    Returns: A new PyTorch Tensor of shape (N, C, H, W)
    """
    if ox != 0:
        left = X[:, :, :, :-ox]
        right = X[:, :, :, -ox:]
        X = torch.cat([right, left], dim=3)
    if oy != 0:
        top = X[:, :, :-oy]
        bottom = X[:, :, -oy:]
        X = torch.cat([bottom, top], dim=2)
    return X
```

```
In [24]: def create_class_visualization(target_y, model, dtype, **kwargs):
    """
    Generate an image to maximize the score of target_y under a pretrained model.

    Inputs:
    - target_y: Integer in the range [0, 1000) giving the index of the class
    - model: A pretrained CNN that will be used to generate the image
    - dtype: Torch datatype to use for computations

    Keyword arguments:
    - l2_reg: Strength of L2 regularization on the image
    - learning_rate: How big of a step to take
    - num_iterations: How many iterations to use
    - blur_every: How often to blur the image as an implicit regularizer
    - max_jitter: How much to jitter the image as an implicit regularizer
    - show_every: How often to show the intermediate result
    """

    model.eval()

    model.type(dtype)
    l2_reg = kwargs.pop('l2_reg', 1e-9) #original 1e-3
    learning_rate = kwargs.pop('learning_rate', 0.1) #original 25
    num_iterations = kwargs.pop('num_iterations', 500)#1000) #original 100
    blur_every = kwargs.pop('blur_every', 10) #original 10
    max_jitter = kwargs.pop('max_jitter', 16) #original 16
    show_every = kwargs.pop('show_every', 100) #original 25

    # Randomly initialize the image as a PyTorch Tensor, and also wrap it in
    # a PyTorch Variable.
    img = torch.randn(1, 3, 224, 224).mul_(1.0).type(dtype)
    img_var = Variable(img, requires_grad=True)

    for t in range(num_iterations):
        # Randomly jitter the image a bit; this gives slightly nicer results
        ox, oy = random.randint(0, max_jitter), random.randint(0, max_jitter)
        img.copy_(jitter(img, ox, oy))

        #####################################
        # TODO: Use the model to compute the gradient of the score for the      #
        # class target_y with respect to the pixels of the image, and make a      #
        # gradient step on the image using the learning rate. Don't forget the    #
        # L2 regularization term!                                                 #
        # Be very careful about the signs of elements in your code.             #
        #################################
        scores = model.forward(img_var)

        # init_grad = torch.zeros_like(scores).float()
        # init_grad[0], target_y = 1.0
        # scores.backward(init_grad)

        specific_class_score = torch.Tensor([target_y]).long()

        scores = scores.gather(1, specific_class_score.view(-1, 1)).squeeze()
        scores.backward(torch.ones_like(scores)) #do the backpass

        grad = img_var.grad - 2 * l2_reg * img_var#.norm(2)
        img_var.data += learning_rate * grad #ASCENT
        # img_var.data -= learning_rate * (img_var.grad) - l2_reg * img_var.norm(2)
        #grad = img_var.grad + 2 * l2_reg * img_var.norm(2)
        #img_var.data += learning_rate * grad
        #img_var.data += learning_rate * grad - learning_rate * l2_reg * img_var.norm(2) * img_var.norm(2)
        #img_var.data += learning_rate * grad - l2_reg * img_var.norm(2)

        #####################################
        #                                     END OF YOUR CODE                      #
        #################################

        # Undo the random jitter
        img.copy_(jitter(img, -ox, -oy))

        # As regularizer, clamp and periodically blur the image
        for c in range(3):
            lo = float(-SQUEEZENET_MEAN[c] / SQUEEZENET_STD[c])
            hi = float((1.0 - SQUEEZENET_MEAN[c]) / SQUEEZENET_STD[c])
            img[:, c].clamp_(min=lo, max=hi)
        if t % blur_every == 0:
            blur_image(img, sigma=0.5)

        # Periodically show the image
        if t == 0 or (t + 1) % show_every == 0 or t == num_iterations - 1:
            print(f"score of target class: {scores[0], target_y.data}")
            print(f"target class {target_y}")
            print(f"class with max score {scores.data.max(1)}")
            scores = model(Variable(X_fooling))
            plt.imshow(deprocess(img.clone().cpu()))
            class_name = class_names[target_y]
            plt.title('%s\nIteration %d / %d' % (class_name, t + 1, num_iterations))
            plt.gcf().set_size_inches(4, 4)
            plt.axis('off')
            plt.show()
    return deprocess(img.cpu())

```

Once you have completed the implementation in the cell above, run the following cell to generate images of several classes. Show the generated images when you submitted your notebook.

```
In [25]: dtype = torch.FloatTensor
# dtype = torch.cuda.FloatTensor # Uncomment this to use GPU
model.type(dtype)


# You can use a single class during your debugging session,
# but please show all the generated outputs in your submitted notebook

# target_y = 76 # Tarantula
# target_y = 78 # Tick
# target_y = 187 # Yorkshire Terrier
# target_y = 683 # Oboe
# target_y = 366 # Gorilla
# target_y = 604 # Hourglass
# out = create_class_visualization(target_y, model, dtype)


targets = [76, 78, 187, 683, 366, 604]

for target in targets:
    out = create_class_visualization(target, model, dtype)
```


tarantula
Iteration 1 / 500

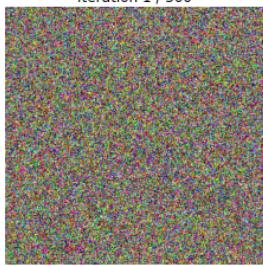


tarantula
Iteration 100 / 500

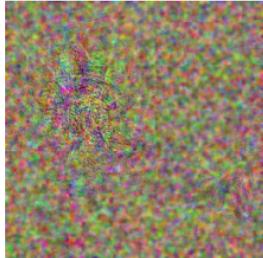


tarantula
Iteration 200 / 500

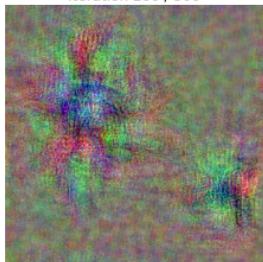

tarantula
Iteration 300 / 500

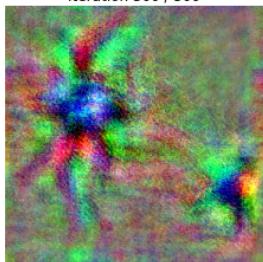


tarantula
Iteration 400 / 500

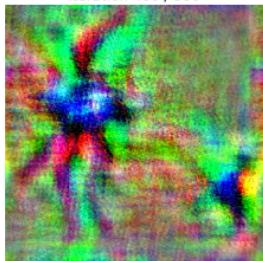


tarantula
Iteration 500 / 500




tick
Iteration 1 / 500

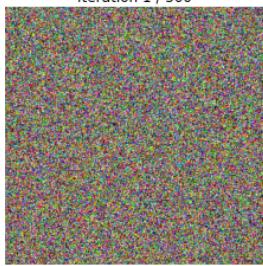


tick
Iteration 100 / 500

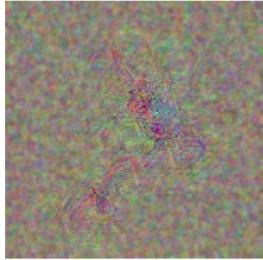


tick
Iteration 200 / 500

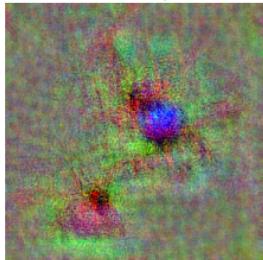


tick
Iteration 300 / 500

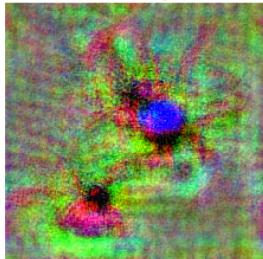


tick
Iteration 400 / 500

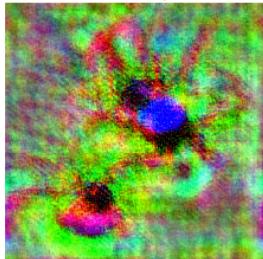


tick
Iteration 500 / 500

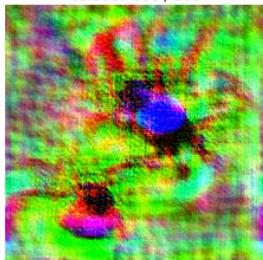


Yorkshire terrier
Iteration 1 / 500

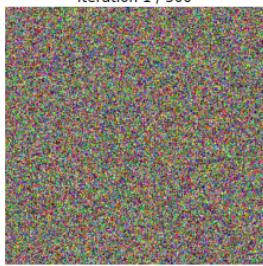


Yorkshire terrier
Iteration 100 / 500

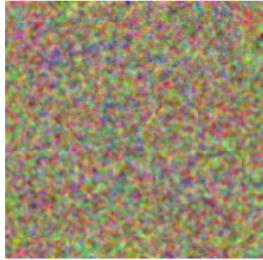


Yorkshire terrier
Iteration 200 / 500

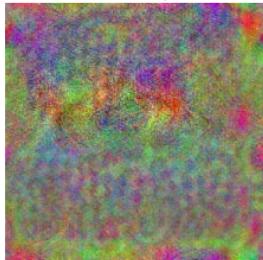


Yorkshire terrier
Iteration 300 / 500

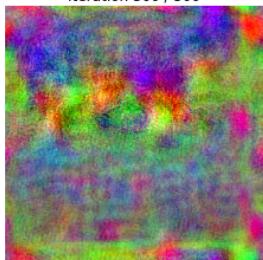


Yorkshire terrier
Iteration 400 / 500

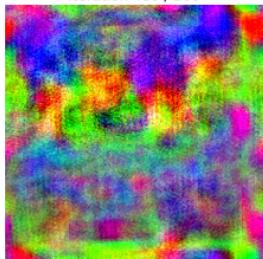


Yorkshire terrier
Iteration 500 / 500

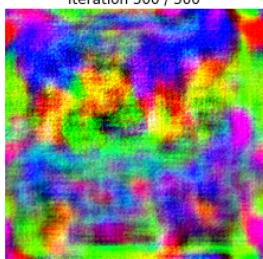


oboe, hautboy, hautbois
Iteration 1 / 500

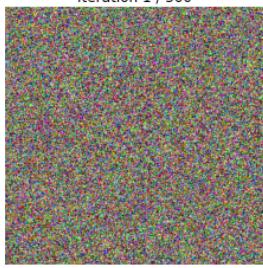


oboe, hautboy, hautbois
Iteration 100 / 500

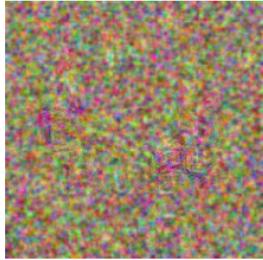


oboe, hautboy, hautbois
Iteration 200 / 500

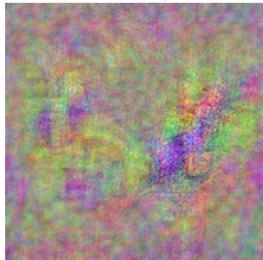


oboe, hautboy, hautbois
Iteration 300 / 500

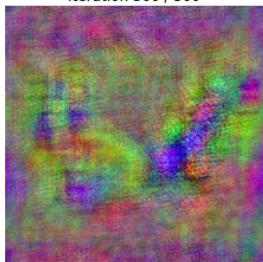

oboe, hautboy, hautbois
Iteration 400 / 500

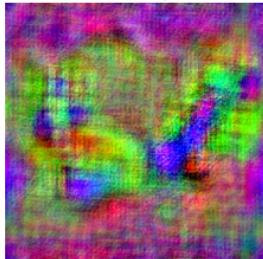


oboe, hautboy, hautbois
Iteration 500 / 500

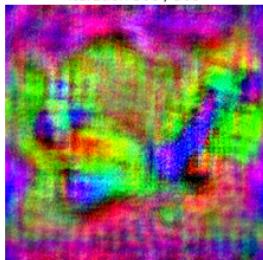


gorilla, Gorilla gorilla
Iteration 1 / 500




gorilla, Gorilla gorilla
Iteration 100 / 500

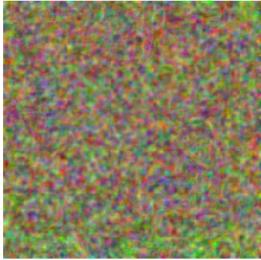


gorilla, Gorilla gorilla
Iteration 200 / 500

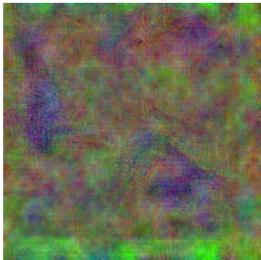

gorilla, Gorilla gorilla
Iteration 300 / 500

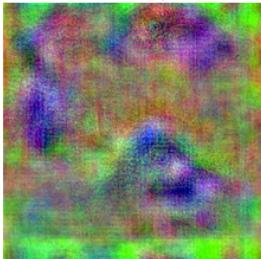


gorilla, Gorilla gorilla
Iteration 400 / 500

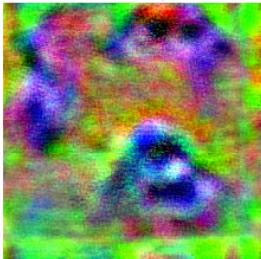


gorilla, Gorilla gorilla
Iteration 500 / 500




hourglass
Iteration 1 / 500

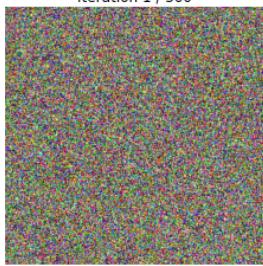


hourglass
Iteration 100 / 500

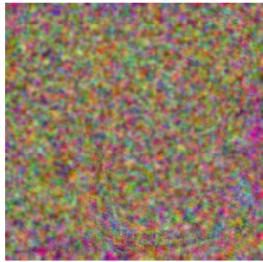


hourglass
Iteration 200 / 500

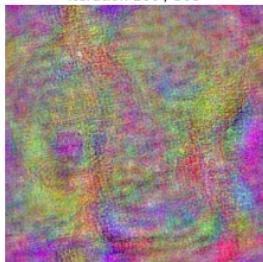


hourglass
Iteration 300 / 500

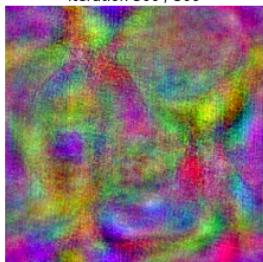

hourglass
Iteration 400 / 500

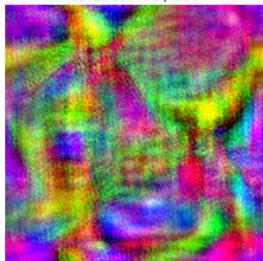

hourglass
Iteration 500 / 500

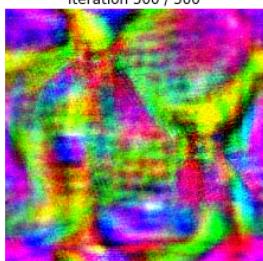

Try out your class visualization on other classes! You should also feel free to play with various hyperparameters to try and improve the quality of the generated image, but this is not required.


```
In [26]: # target_y = 78 # Tick
# target_y = 187 # Yorkshire Terrier
# target_y = 683 # Oboe
# target_y = 366 # Gorilla
# target_y = 604 # Hourglass
target_y = np.random.randint(1000)
print(class_names[target_y])
out = create_class_visualization(target_y, model, dtype)
```

orangutan, orang, orangutang, Pongo pygmaeus


orangutan, orang, orangutang, Pongo pygmaeus
Iteration 1 / 500




orangutan, orang, orangutang, Pongo pygmaeus
Iteration 100 / 500

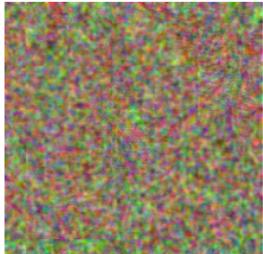


orangutan, orang, orangutang, Pongo pygmaeus
Iteration 200 / 500

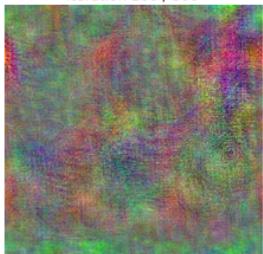

orangutan, orang, orangutang, Pongo pygmaeus
Iteration 300 / 500

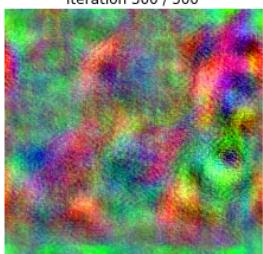

orangutan, orang, orangutang, Pongo pygmaeus
Iteration 400 / 500

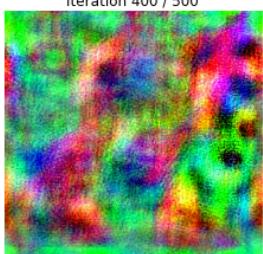

orangutan, orang, orangutang, Pongo pygmaeus
Iteration 500 / 500

