: 7 March : Class-15

Resource

anything on server that u can access via URL

Http requests..

- **GET**
  - To read / retrieve a resource..
  - no side effects (no changes in something else)
  - IDEMPODENT
    (calling 10x ≈ calling 1a)
  - cacheable by browser and CDN
    - → network of servers around the world -- that caches stuff
  - → prefectchable aggresively in NEXT.js

- **POST**
  - Create a new resource
  - NO IDEMPODENT
  - Calling 10x may create 10x resorce
  - 200, 201 → status code could be any -- but we need to not disrespect standards.

- **PUT** :
  - replace / update a resource completely
  - send full object
  - usually IDEMPOTENT

- **PATCH** :
  - partially update a resource. send ONLY changed field.

- **DELETE** : remove a resource

- **HEAD** : same as get but no body

(u may not use it)

- **OPTIONS** : Preflight / capability check

CORS

→ browser sends it automatically before certain requests to ask the sever:

Hey server.. is it cool if i send you a DELETE REQ? what abt PUT?

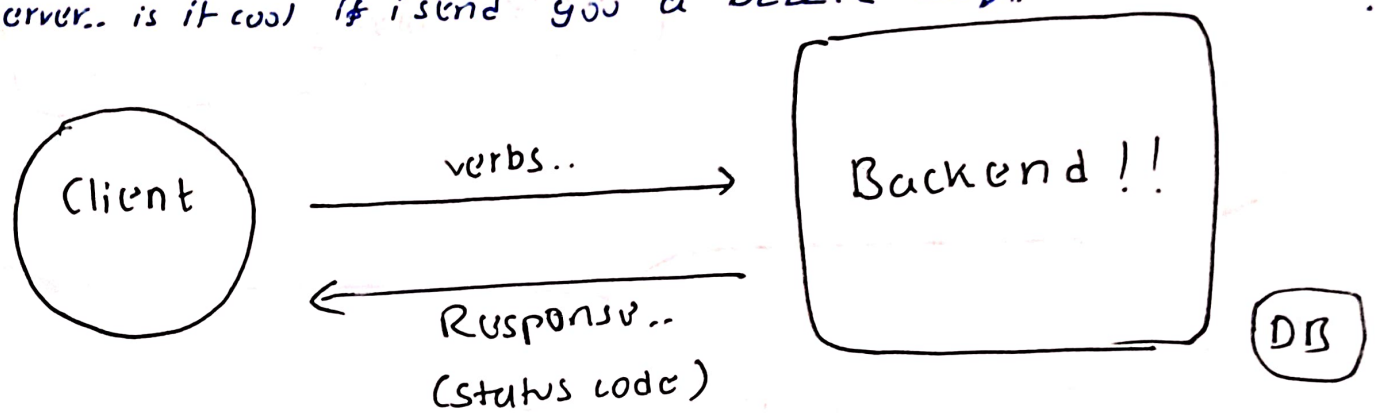

(npm → udhari ka code)

- npm 2014: independent
- 2019 : Github Acq npm
- ~~2015~~ :

and Microsof Acq github

Who owns npm?

- Semver versioning : x.x.x
  - major
  - minor
  - patch

- npm init -y

TypeScript :

→ Just type to JS

3. Node JS bindings C++ bridge ..

find out

[global vs global This]

⇒ write article on Node JS architecture...

Node JS

Not just JS on the server..

Google V8 → ek layer lagayi gayi iske upar..

libuv async I/O layer..
Single Thread

NODE JS

V8 Engine: JS - Machine code (JIT compilation)
manage heap and call stack
Knows nothing abt files, networks or timers

LIBUV (C library):
Event loops, thread pool
OS level async I/O
DNS lookups