Js- classes

22 - feb - 2026

↳ Syntactic sugar

Syntax

```
class Cricketer {
    constructor (name, role) {
        this.name = name
        this.role = role
        this.matchesPlayed = 0
        this.stamina = 100
    }

    introduce () {
        return `${this.name} the {this.role} |
                matchesPlayed : ${this.matchesPlayed}
                stamina : ${this.stamina}`
    }
}
```

#make new..

```
const player1 = new Cricketer ("Bumran", "Bowler");
```

↳ typeof → function

Interview gotchas!!

↳ Detailed code on :

github.com/realSUDO/cohort-journey

Symbol

- const a1 = Symbol ("abc")
- const a2 = Symbol ("abc")

```
console.log (a1)        // Symbol (abc)
typeof a1               // Symbol
a1 === a2               // false
a1.toString ()          // ~~abc~~ 'Symbol (abc)'
a1.description          // 'abc'
```

hidden when used as key in obj and printed
Obj.keys ()
no loops

Then how to see?

Object.getOwnPropertySymbols (obj)

making object iterable

```
const obj = {
    queries : ["apple", "banana", "mango"],
    [Symbol.iterator]() {
        let idx = 0;
        const queries = this.queries;
        return {
            next () {
                if (idx < queries.length) {
                    return { value : queries [idx++], done : false };
                }
                return { value: undefined , done: true };
            },
        };
    };
```

```
for (const query of obj) {
    console.log (`filing RTI : ${query}`);
}
```

---

back to objects..

```
try {
    if (!data) {
        throw new Error ("error went right");
    }
} catch (error) {
    console.log (error);
    console.log (error.message);
} finally {
    console.log ("success");
}
```

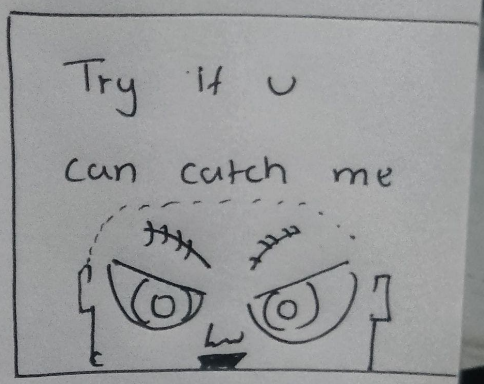

PROMISES → Trust me bro

To be continued in next class..