

Nurtured at Home: A Local-First Schema-as-Application Architecture for User-Owned Personal AI

Satoshi Nakajima
The Singularity Society
satoshi@singularitysociety.org

July 13, 2026

Abstract

Personal AI assistants are increasingly defined by what accumulates around the model—memories, data, and applications—rather than by the model alone: every major vendor now ships memory features that invite users to build up context on the vendor’s premises. We take a position on this arrangement: if accumulation is what makes an assistant valuable, it is also what makes leaving costly, and remedies based on memory portability carry only one layer of what a user accrues. A personal assistant, we argue, should be nurtured at home—grown in an environment the user owns.

We present MulmoClaude, an open-source system that instantiates this position through a schema-as-application architecture: the user describes what they need in natural language; the model authors a small declarative schema; and a host runtime—not the model—renders the interface, enforces the schema at its write interfaces and reconciliation loop, and runs recurrence over a plain-file workspace on the user’s own machine. The model authors the application; the host runs it; the records endure. Enforcement is tiered by consequence: invalid applications are prevented, invalid data is quarantined and reported for repair, model-authored view code is contained in a capability-scoped sandbox. We evaluate the architecture in three parts: (i) reliability—schema-generation validity and host-side rejection across a corpus of app-creation tasks, measured over three independent trials; (ii) capability—cross-application workflows over an accumulated workspace, compared against two observed baselines, an ablation of our own system reproducing one-shot generative-UI architectures and agentic code generation; and (iii) a migration experiment quantifying what memory-only portability carries versus what the workspace contains. We report the costs of local-first ownership alongside its benefits, and outline the longitudinal questions the system opens. The result is a working architectural blueprint—and an evidence base—for personal AI whose accumulation remains with the person it describes.

1 Introduction

Something has changed in what a personal AI assistant *is*. Two years ago, assistants competed on the capability of their underlying models; today, the major assistant vendors ship memory: features that persist what the assistant learns about its user across conversations, accumulate preferences and context, and fold that accumulation back into every response [5, 20, 27]. The competitive

© 2026 Satoshi Nakajima. This work is licensed under a Creative Commons Attribution 4.0 International (CC BY 4.0) license: <https://creativecommons.org/licenses/by/4.0/>.

frontier has moved from the model to what gathers around it. A user’s assistant is decreasingly a model with a chat window, and increasingly a body of accumulated state—conversations, preferences, documents, and workflows—that happens to be animated by whichever model the vendor currently runs.

Users have noticed, and their behavior has changed accordingly. In a recent study of long-term chatbot companionship, participants described their interactions as *cultivating* the assistant—believing that the data they provided contributed to its development—and acted on that belief: keeping personal backups of chat logs, and refusing to delete an assistant because of what had accumulated within it [15]. People are not merely using these systems. They are, in their own words, raising them.

This paper takes a position on where that raising should happen. If accumulation is what makes an assistant valuable, then accumulation is also what makes an assistant expensive to leave: every conversation deepens a store of context that does not transfer, so the cost of switching grows with use—not as a side effect, but as a structural property of the arrangement. Hosted accumulation exposes users to two distinct failure modes. The first is *leakage*: interaction exhaust—prompts, corrections, preferences—flows to the provider and improves an asset the user does not own [18]. The second is *captivity*: the accumulation itself resides on the provider’s premises, subject to that provider’s continuity, pricing, and terms. Existing remedies address each only partially. Enterprise tenant boundaries answer leakage but not captivity; the accumulation still lives in someone else’s infrastructure. Memory-portability protocols [16, 21] answer part of captivity, but carry only one layer of what a user accrues—a hypothesis we make precise, and test, in this paper. We note that the value of accumulated personalization is itself an open empirical question [25]; in our view this strengthens rather than weakens the case for examining ownership now, while the arrangement is still being set by defaults rather than by evidence.

Our position, stated plainly: a personal assistant should be *nurtured at home*—grown in an environment the user owns. We present MulmoClaude, an open-source system that instantiates this position, built around an architecture we call *schema-as-application*. When the user describes something they need—a restaurant list, an invoice tracker, a vocabulary drill—the model does not generate an application; it authors a small declarative schema. A host runtime, not the model, does the executing: it renders the interface from the schema, enforces the schema at its write interfaces and its reconciliation loop, and runs recurrence and reminders over a plain-file workspace on the user’s own machine. The model authors the application; the host runs it; the records endure. The host’s enforcement is tiered by consequence—an invalid schema never becomes a live application, invalid data is quarantined and reported for repair rather than trusted, and the one place model-authored code runs is contained in a capability-scoped sandbox (§5). Because the workspace is plain files, the accumulation is inspectable, copyable, and independent of any single vendor or model.

We evaluate the architecture in three parts. First, reliability: across a corpus of app-creation tasks, we measure how often model-authored schemas are valid, how often the host’s validation rejects what should not run, and whether reconciliation and recurrence behave correctly against a hand-built oracle (E1). Second, capability: on a suite of cross-application personal workflows over an accumulated workspace, we compare against two observed baselines—an ablation of our own system with persistence, validation, and reconciliation disabled (reproducing the architecture of one-shot generative-UI systems [4] under identical conditions) and agentic code generation—with the hosted assistant-with-memory alternative discussed qualitatively (E2). Third, migration: we take a workspace nurtured over weeks, export what memory-portability protocols carry, and measure—by typed inventory and by task replay—what fraction of the assistant’s operative state survives the move (E3). We report the costs of local-first ownership with the same care as its benefits: setup burden, backup responsibility, availability limits, and the dependence on rented model capability

that local-first does not remove.

This paper contributes:

1. **The schema-as-application architecture:** model-authored declarative schemas executed by a validating host runtime over a user-owned plain-file workspace, with a precise account of its schema language, validation semantics, and reconciliation model (§5).
2. **MulmoClaude**, an installable, MIT-licensed artifact implementing the architecture end to end, including cross-application composition across a plugin registry (§4–§5).
3. **An evaluation** of reliability, capability against two observed non-strawman baselines, and a migration experiment that quantifies—by auditable inventory and task replay—what memory-only portability carries and what it leaves behind (§6).
4. **A tradeoff analysis** of local-first personal AI: what ownership buys, what it costs, and which costs the architecture mitigates versus merely accepts (§7).

2 Related work

Natural language to declarative applications. The closest published system is Jelly [4], which shares our starting move and our motivation: an LLM interprets the user’s prompt into a declarative data model, a rule-based host engine renders the interface from it, and—the argument we inherit gladly—direct code generation is rejected because generated code resists iterative re-tailoring by end users. Where we part is everything after rendering: Jelly was evaluated on generated data in single lab sessions, with persistence, external data, and context preservation deferred. Our contribution begins at that deferral—record validation, reconciliation, and recurrence executed by the host over a persistent, user-owned store—and our E2 ablation is designed to measure exactly that delta, by disabling those components inside our own system rather than reimplementing Jelly (§6.2). The declarative lineage is older and broader: Varv [3] treats behavior as reprogrammable declarative data; Potluck [13] has AI draft declarative rules over personal notes; GenerativeGUI [9] and Generative UI [12] generate interfaces dynamically in chat; Software as Content [24] argues that dynamically generated applications should be the primary human-agent medium. We take from this line the conviction that the precise artifact, not the code, is the application—and add the runtime that makes the artifact durable, and the ownership argument for where it should live.

Memory as the assistant’s substrate. That an assistant’s value lies in persistent memory rather than raw model capability is now established engineering doctrine: MemGPT [20], MemoryBank [27], and Mem0 [5] build the machinery, and hosted assistants ship it as product. This literature establishes accumulation-as-mechanism and is silent on accumulation-as-property: none of it discusses who owns the store, what leaving costs, or what happens to the applications that grow around it. We also note, with [25], that the payoff of accumulated personalization is empirically contested—humans preferred personalized responses in barely half of judged cases—which in our reading raises rather than lowers the stakes of the ownership question (§3.3).

Portability as the remedy. Portable Agent Memory [21] states our problem verbatim—accumulated agent context “remains locked within vendor-specific runtimes”—and answers with an open export protocol; SAMEP [16] is a second independent proposal. We share the diagnosis and test the remedy: E3 migrates a workspace through exactly the layer these protocols carry and finds that zero

of four workflows survive—the accumulation is more than the memory, by kind rather than degree (§6.3). Our answer is ownership of the environment, not portability of one stratum.

Nurturing, and the people already doing it. The cultivation metaphor has been claimed: Nurture-First [26] argues that a domain-expert agent is “born with minimal scaffolding and then raised through sustained interaction,” with a single-user case study as evidence. We ask the question that framing leaves open—*where* the raising happens, and who owns the upbringing—and we broaden the subject from domain expertise to a person’s life. On the empirical side, CSCW work on long-term companionship [15] documents users who already believe they cultivate their assistants and who keep backups and refuse deletion; that behavior is analyzed there as attachment, never as switching cost—a reframing this paper’s §3 supplies.

Malleable software and local-first computing. Our apps-for-one framing descends from the malleable-software line [14, 23] and the local-first tradition [11], and we happily concede the lineage. The deltas: malleable software’s LLM path is code generation inside a malleable environment, and its tools are composed by people—the essay is explicitly skeptical of AI orchestration—where our applications are model-authored declarations composed by an agent; and local-first’s argument is agency and ownership as values, where ours is switching-cost economics (§3), for which local-first happens to be the remedy. The local-first literature’s decade of sync results is also the most credible path through our multi-device limitation (§7).

Agent–GUI protocols. The contract between an agent and interactive surfaces is a crowded, fast-moving space: MCP Apps [17], AG-UI [6], A2UI [7], and vendor app SDKs all define variants of tool-results-that-mount-as-UI. We claim no novelty at this layer (§4): our published protocol is the artifact’s implementation choice, and the commitments it serves—composition across a registry, over an accumulation the user owns—are where this paper’s claims live.

Economics of information and switching costs. The argument of §3 is assembled from canonical parts: Arrow’s information paradox [1], Hayek’s knowledge of particular circumstance [8], and the switching-cost literature [10, 22]. Its AI-age inversion—the buyer of intelligence pays twice, once in money and once in disclosed knowledge—has recent practitioner articulation at enterprise scale [18], to which §3.2 adds the leakage/captivity distinction and the personal-scale, local-first conclusion; the practitioner unbundling literature [2] supplies the industry context for §8.3.

Agent substrates. Complementary to all of the above, event-sourced agent runtimes [19] locate an agent’s identity in its append-only history and derive auditability and forkability from that inversion. Our workspace is file-per-entity rather than event-sourced, with append-only islands where correctness demands them (§5.6); the substrate question—what the accumulation should be made of—is orthogonal to, and composable with, the ownership question this paper argues.

3 Motivation: accumulation, lock-in, home

(Position section—argues a design stance; makes no empirical claim beyond the cited sources. The one falsifiable claim it produces—that memory portability carries only part of the accumulation—is tested in §6.)

3.1 An old paradox, inverted

Arrow observed that information resists being traded: its value to a buyer is unknown until disclosed, but disclosure is the transfer—the seller gives the good away in the act of selling it [1]. The market for machine intelligence inverts the direction of the leak. A model is useful to its user roughly in proportion to what the user reveals to it: preferences, corrections, documents, the context of a life or a business. The buyer of intelligence therefore pays twice—once in money, and once in the disclosed knowledge that makes the purchase useful—and the second payment flows in only one direction. This inversion has begun to receive practitioner articulation at enterprise scale [18]; its canonical ancestor is Arrow, and what is being disclosed is precisely what Hayek called the knowledge of the particular circumstances of time and place—the knowledge that only its holder can possess, and that no central provider could otherwise obtain [8].

3.2 Two failure modes, often conflated

Hosted accumulation exposes the user to two distinct risks, and remedies for one are routinely mistaken for remedies for the other.

Leakage is the flow of interaction exhaust—prompts, corrections, usage patterns—into an asset the provider owns. Its natural remedy is a boundary: contractual and technical guarantees that what the user reveals is not learned from without consent. Enterprise tenant isolation is exactly this remedy, and it is the one the industry is presently building [18].

Captivity is different: the accumulation itself—the memory, records, and applications that make the assistant valuable—resides on the provider’s premises, subject to the provider’s continuity, pricing, and terms. A tenant boundary does not touch captivity; the boundary is drawn *inside* someone else’s building. Captivity’s proposed remedy is portability: open protocols for exporting agent memory and re-importing it elsewhere [16, 21]. Portability is genuine progress, and we share its diagnosis. Our disagreement is with its scope, and it is the disagreement this paper is built to test: what a user accrues in a nurtured assistant is more than its memory. It is records under schemas, applications with host-executed semantics, views, recurrence state, and the operating manuals the model wrote for itself (§5). A memory export carries none of the parts that execute. If that is right, portability under-remedies captivity not by degree but by kind—and §6’s migration experiment measures exactly this.

3.3 Switching costs that compound

Classic switching-cost economics describes markets where the cost of leaving a vendor rises with investment in it, and where rational vendors compete to create such costs [10, 22]. Accumulated assistant state is a textbook instance with an unusual property: the investment is made *by using the product at all*. Every conversation, every correction, every small application deepens a store of context that does not transfer; the switching cost is not an exit fee that can be waived but a body of accumulated state that must be rebuilt. The personalization race among assistant vendors is therefore, structurally, a race to raise switching costs—whatever its participants intend. We state this as an economic reading of the arrangement, not a measured harm: indeed, the payoff of accumulated personalization is itself empirically contested [25]. But that uncertainty cuts toward caution, not away from it. The defaults being set today decide who owns the accumulation *before* the evidence about its value arrives; if the value materializes, the lock-in arrives with it, already in place.

3.4 Nurtured at home, operationally

The remedy this paper explores is ownership of the environment rather than portability of one layer. “Nurtured at home” is not a sentiment but four testable properties, each removing a specific failure mode:

- *Plain, local files.* The accumulation lives in a workspace on the user’s machine, in formats readable without the system that wrote them. Removes export lock: there is nothing to export, because nothing is held.
- *Open source.* The environment cannot be discontinued, repriced, or acquired out from under the accumulation it hosts. Removes platform mortality as a risk the user must price in.
- *Local execution.* The engine that renders, validates, and reconciles runs on the user’s machine; no request to a host service is needed for the assistant’s applications to function. Removes availability-by-subscription.
- *Relay-only remote access.* Reaching the assistant from a phone or messaging bridge traverses a relay that carries messages in transit and stores nothing. Removes the quiet re-centralization that remote convenience usually smuggles in.

Two honest boundaries on the claim. First, ownership is not model-independence: the intelligence is still rented, and a local-first system inherits every dependency on its model provider except custody of the accumulation—the design answer is to keep the workspace unchanged across engine swaps, which §5’s architecture enables but this paper does not benchmark. Second, ownership has real costs—setup, backup, availability, security—which we treat symmetrically in §7 rather than as footnotes. The position is not that home is free. It is that home is the only place where the compounding asset compounds for its owner.

4 Design commitments

MulmoClaude is built on four commitments. They are separable—any one can be adopted alone—but they reinforce one another, and the fourth is the one the other three exist to serve.

The agent is a universal controller. We place the model in the architecture as a controller in the MVC sense: it takes input—natural language—and decides which capability to invoke, in what order, with what arguments. Crucially, it *joins* the existing controller layer rather than replacing it. Every capability in the system is reachable two ways: through a conventional UI with routes, forms, and buttons, and through the agent—neither path privileged. What distinguishes this controller from a classical one is its scope: it does not belong to one application. It composes across a registry of plugins that in any other product would be separate applications, so cross-application work—read the ledger, write the chart; read the wiki agreement, create the recurring obligation—is not an integration feature but the default mode of operation. A second capability falls out for free: because the controller’s input is multi-modal, any plugin that accepts natural language inherits image and audio input without integration code—a photographed receipt reaches the same accounting API a typed entry would.

Chat summons GUIs. The interface is multi-modal in both directions. The agent’s reply is a choice among formats—prose, a chart, a document, a rendered collection view—selected to fit the content; and what the agent *asks for* is equally a choice: when six structured fields are needed, it presents a form rather than extracting them from conversational back-and-forth. The GUI is not “the app”; it is what the agent renders when text is the wrong modality, in either direction.

The protocol is open. The contract between agent and GUI surface cannot be a private API, or the previous two commitments collapse into a monolith with a chatbox. MulmoClaude builds on the open tool-call and MCP layers and extends them, through a small published protocol, to cover the case those layers do not: a tool result that mounts as an interactive surface and must call back into its host. We make no novelty claim for this layer—several such protocols now exist [6, 7, 17]—and treat ours as the artifact’s implementation choice.

The accumulation belongs to the user. Everything the assistant accrues—records, schemas, manuals, documents, history—lives as plain files in a workspace on the user’s machine, with no server-side database (§5, §3.4). The first three commitments describe how the software works; this one decides whom it works *for*. A universal controller composing over an accumulation someone else owns is a better service. The same controller over an accumulation the user owns is an assistant being nurtured—and the difference between those two sentences is the subject of this paper.

5 Architecture: schema as application

(Implementation facts in this section are verified against the MulmoClaude source tree; exact file references for reviewers and replication are catalogued in the open-source artifact’s evaluation tree.)

5.1 Two artifacts, two runtimes

When a user asks for an application—“keep a list of restaurants I want to try”—the model authors two artifacts into the workspace. The first is `schema.json`, a declarative description of the data model and its behavior, consumed by the *host*. The second is `SKILL.md`, a short operating manual in prose—when to invoke this collection, how to derive record identifiers, what each field means, what not to do—consumed by the *model itself* in later sessions, via the skills mechanism’s progressive disclosure. (Figure 1 draws the split; Figure 2 shows a complete schema and a record it governs.) This pairing is the architecture in miniature: the application has two runtimes. The host executes what must never be guessed—rendering, validation, recurrence—from the schema. The model executes what cannot be enumerated—interpreting “mark that ramen place as visited”—guided by the manual its earlier self wrote. The records themselves are one JSON file each in a plain directory. The slogan, stated exactly: the records are data, the schema is the application, the model is the author, and the host is the runtime.

5.2 The schema language

The schema language is deliberately small but not a toy. Seventeen field types cover the personal-data domain, and they split into two groups that mirror the architecture’s division of labor. The plain types any author can use without thinking—`string`, `text`, `email`, `number`, `date`, `datetime`, `boolean`, `markdown`, `enum`, `image`, `file`—describe data. The semantic types carry application behavior the host executes: `money` is currency-aware; `toggle` projects an enum into a checkbox the host computes; nested `table` holds row-structured sub-records; `derived` declares formula fields the host

Schema as application: two artifacts, two runtimes

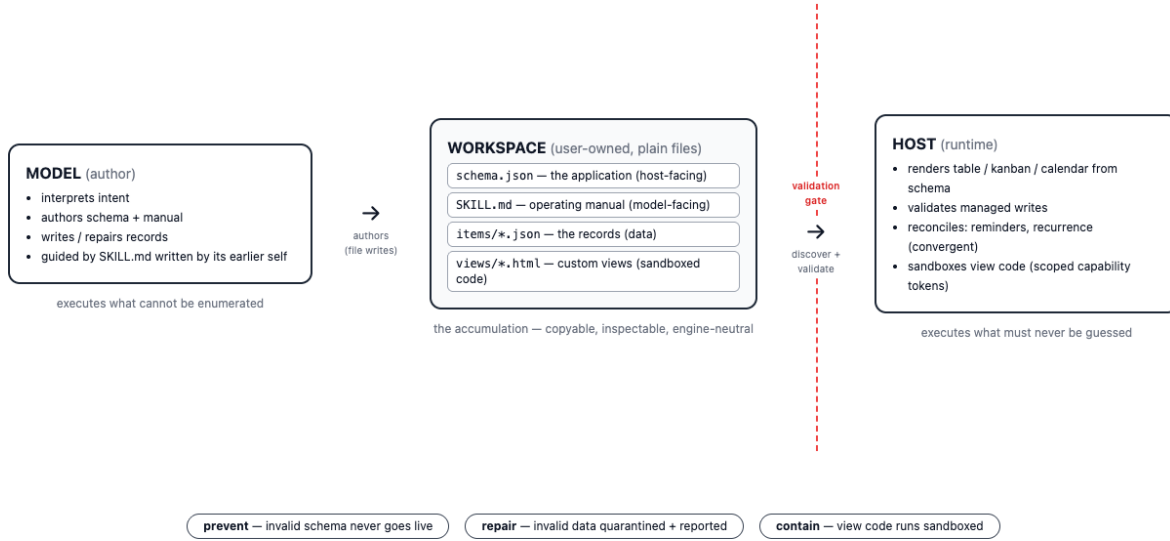


Figure 1: The schema-as-application architecture. The model authors declarative artifacts into the plain-file workspace; a validation gate ensures an invalid schema never becomes a live application; the host runtime—not the model—renders, validates, and reconciles over the user-owned records. Enforcement is tiered by consequence: prevent (applications), repair (data), contain (code).

evaluates, including cross-collection dereferences; and the relational pair **ref** and **embed** point records at other collections—the types that let applications compose (§5.6). Beyond fields, the schema declares behavior the host executes:

- *Completion*: which field marks a record done, and which values count (`completionField`, `completionDoneValues`).
- *Time and reminders*: a trigger date field with lead days (`triggerField`, `triggerLeadDays`) and a notification predicate (`notifyWhen`) gate in-app reminders.
- *Recurrence*: a `spawn` declaration describes how a completed or due record produces its successor—unit, interval, day-of-month, or driven by a field of the record itself.
- *Views*: the applicable view modes are derived from the schema rather than hardcoded—a table always; a calendar if a date field exists; a kanban if an enum exists (`calendarField` / `kanbanField` pin the anchor)—plus optional custom views (§5.5).
- *Conditional structure*: a field can declare visibility predicated on another field’s value—in the restaurant list from our own workspace, `rating` is hidden until `visited` is true.

Figure 2 shows a complete schema and a record it governs, from our own workspace: the `rating` field is an enum whose `when` clause hides it—and refuses it on the managed write path—until `visited` is true; the `views` entry registers a model-authored map view with an explicitly declared read-only capability set, which is all the sandbox will sign tokens for (§5.4); and the record is one


```

{
  "title": "Restaurants",
  "icon": "restaurant",
  "dataPath": "data/restaurants/items",
  "primaryKey": "id",
  "displayField": "name",
  "fields": {
    "id": { "type": "string", "label": "ID", "primary": true, "required": true },
    "name": { "type": "string", "label": "Name", "required": true },
    "cuisine": { "type": "string", "label": "Cuisine" },
    "visited": { "type": "boolean", "label": "Visited" },
    "rating": { "type": "enum", "label": "Rating",
      "values": ["*", "**", "***", "****", "*****"],
      "when": { "field": "visited", "in": ["true"] } },
    "image": { "type": "image", "label": "Photo" },
    "notes": { "type": "text", "label": "Notes" }
  },
  "views": [
    { "id": "tokyo-map", "label": "Map", "icon": "map",
      "file": "views/tokyo-map.html", "capabilities": ["read"] }
  ]
}

```

A record the schema governs (one JSON file in `data/restaurants/items/`):

```

{
  "id": "tartine-bakery",
  "name": "Tartine Bakery",
  "cuisine": "Bakery",
  "visited": true,
  "rating": "****",
  "notes": "Go early; the morning bun sells out."
}

```

Figure 2: A complete application: the schema (top) and a record it governs (bottom). The schema declares data (typed fields), conditional structure (`rating` appears—and is accepted—only once `visited` is true), and presentation (a model-authored custom view with a declared read-only capability set). From these declarations the host renders table, kanban, and map views, validates writes on the managed path, and sandboxes the view code; the model authored both artifacts—and the companion operating manual that guides its own future sessions—from one sentence of conversation. Schema abridged; from the authors’ own workspace (record synthetic).

plain JSON file whose fields the reader can check against the schema by eye. Everything the host renders, validates, and schedules for this application derives from those declarations.

The schema-of-the-schema is enforced by a validator that checks not only shape but roughly forty cross-field invariants the type system cannot express—that `triggerField` names a real date field, that a kanban anchor is an enum, that a `spawn` successor is not born already matching its own `spawn` predicate (the static half of a two-layer runaway-recurrence guard). The schema language earns its keep exactly where a validator can say *no*.

5.3 Lifecycle: authoring, mirroring, discovery

Creation is writing files: the model writes `SKILL.md`, `schema.json`, and optional templates into the skill directory with its ordinary file tools; a host bridge mirrors them into the agent-skills directory and triggers rediscovery. Discovery is the gate: every schema is parsed and validated on each pass, and a schema that fails validation or the acceptance gates (primary key exists; data path resolves inside the workspace) simply never becomes a live collection—it is logged and skipped. Subsequent schema *edits* through the management tool run the same validator before writing, and refuse invalid changes with actionable errors, so a working application cannot be corrupted through the managed path. Iteration is cheap by construction: the schema is disposable, the records endure, and when the application stops fitting, the user says the sentence again.

Evolution is not migration, and the distinction is deliberate. A schema edit performs no rewrite pass over existing records: additive changes (a new optional field, a widened enum) leave every record valid, while a constraining change makes nonconforming records fall into the same repair tier as any other invalid data—they drop out of the rendered views, and the validation scan reports each one to the model at the next read or present, which proposes repairs to the user (observed end-to-end in §6.2, T8). The user-visible signal is thus a record’s absence from the view plus the assistant’s explanation and offer to fix—never a silent rewrite of data the model did not author. This keeps the destructive-migration failure mode out of the model’s reach: the worst a bad schema edit can do to existing records is hide them reversibly, and the managed edit path will not accept an invalid schema at all (§5.4).

5.4 Enforcement, honestly: prevent, repair, contain

It would be convenient to claim the host “validates everything.” The actual design is more discriminating, and we believe more instructive: enforcement is tiered by the consequence of failure.

- *Prevent (applications)*. An invalid schema never executes, in the precise sense that it never becomes a live collection. Since schemas are declarative data rendered by a generic engine—not generated code—an invalid schema executes nothing. (The other things a bad authoring pass can produce—a misleading manual, a raw-written record, a broken view—are exactly what the repair and containment tiers below exist for.)
- *Repair (data)*. Records written through the management tool are validated before the write—primary-key/filename agreement, required fields, enum membership—with per-row accept/reject so the model can fix and retry. But the workspace is plain files, and the documented escape hatch is writing records directly with file tools; that path is not validated at write time. The system’s answer is containment at read plus feedback: a malformed record file is skipped at read time (it disappears from views rather than corrupting them), and a best-effort validation scan reports problems back to the model whenever it lists or presents the collection, closing the loop for repair. The guarantee is not “all stored records are valid”; it is “invalid records cannot poison the application, and the author that produced them is told.”
- *Contain (code)*. The one place model-authored *code* runs is custom views: LLM-written HTML/JS rendered in an iframe with an opaque origin (no access to the host’s session or storage), receiving data only through a short-lived, signed capability token scoped to exactly one collection’s view-data endpoint with declared read/write capabilities. The view’s behavior is not validated—it is sandboxed, which is the correct tool for code whose behavior cannot be enumerated.

This tiering also answers the semantic-mismatch question static validation cannot: a schema can be valid and wrong about intent. The remedy is the cheap re-authoring loop plus the reconciler’s error surfacing—mismatches are corrected by saying the sentence again, not by trusting the model’s first attempt.


Two of these choices are points in a design space rather than requirements of the architecture. Because the managed tool path and the raw-file path coexist, access mediation is demonstrably a policy: a stricter variant closes the escape hatch and moves all data enforcement into the prevent tier, at the cost of the agent’s generic file-tool legibility. Likewise the substrate: records could live in an embedded relational database in the workspace—gaining indexed and relational queries while keeping the accumulation local, copyable, and vendor-independent—at the cost of human readability, diffability, and the agent’s direct access. We occupy the plain-files, direct-access corner deliberately: at personal scale (order 10^3 records in our own workspace) nothing needs an index, and the substrate being natively legible to the user, to standard tools, and to the model is worth more than query performance. The principles this paper argues—model as author, host as runtime, accumulation owned by the user—hold at every corner of this space (§8).

5.5 The reconciler: convergence, not scheduling

Recurrence and reminders are executed by a reconciler that is convergent rather than imperative: each pass re-reads a record from disk and re-derives the desired state—should a reminder exist? is a successor due?—and makes only the changes needed to converge. It is driven by filesystem events on the record directories plus a one-minute wall-clock tick (a date coming due changes no file), with per-record coalescing. Successor creation is create-if-absent under a deterministic identifier derived from the trigger date, so observing the same condition many times still yields exactly one successor; a runtime guard complements the static one against runaway recurrence, and date arithmetic is civil and leap-safe. The practical consequence: the reconciler can be killed, restarted, or run against a workspace modified behind its back—by the user, the model, or a sync tool—and converge to the same state. For a substrate whose files the user is explicitly invited to edit, idempotent convergence is not an implementation detail; it is what makes plain-file ownership compatible with host-executed behavior.

5.6 Boundary and composition

The collection *engine*—discovery, validation, REST surface, reconciler—is host infrastructure. The collection *viewer* is a plugin in the same registry as charts, forms, and documents, registered through the open protocol that extends MCP for GUI-bearing tool results. This split is what makes cross-application composition ordinary: the agent reads accounting records and writes to the chart plugin; reads a wiki agreement and writes a record into a recurring-obligation collection whose *spawn* declaration then does the recurring. In our own workspace—nurtured over several weeks and used as the migration subject in §6—forty-three such applications coexist: the restaurant list (Figure 3), invoice tracker, and vocabulary drill of the introduction are real, alongside collections for health checkups, tax payments, a swim log, and a World Cup schedule, together holding on the order of 1,200 records, with 34 custom-view files across 25 of the collections. (We disclose collection subjects and aggregate counts; record contents—names, amounts, holdings—are the owner’s own business and appear nowhere in this paper.) None was built by a software company; each is a schema, a manual, and a folder of records.

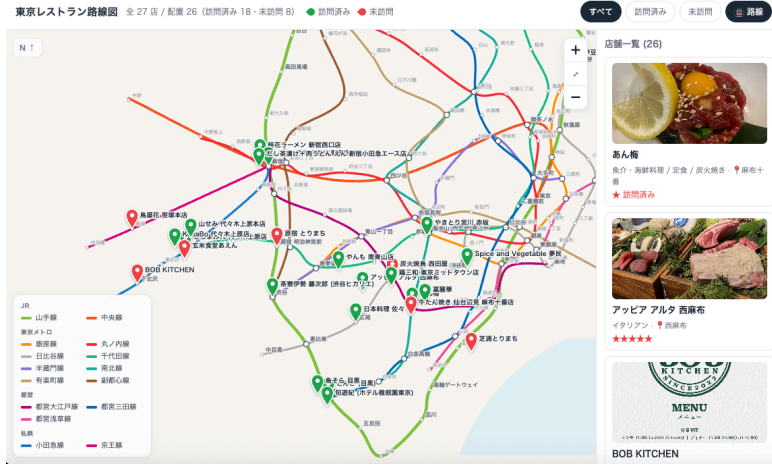

(a)



(b)

Figure 3: One accumulation, two doorways. (a) The restaurant collection’s model-authored custom view on the desktop: 27 real records rendered over a Tokyo rail map, visited/unvisited state from the schema’s fields—LLM-written HTML running in the host’s capability-scoped sandbox (§5.4). (b) The same collection reached from a phone through the relay: a mobile-targeted view with a default-deny write scope. The relay carries messages in transit and stores nothing; the records never leave the machine at home (§3.4).

6 Evaluation

We evaluate the architecture against the three claims a skeptical reader will test: that model-authored schemas are reliable enough to trust (E1), that the host runtime—not the generation step—changes what users and agents can do (E2), and that a memory-only export carries materially less than the accumulation (E3). All task runs are single-trial; every transcript, seed, and harness script ships in the artifact’s evaluation tree, and the ablation and clock switches ship in the released system itself, so each run is individually inspectable and reproducible. Deviations between protocol and execution are disclosed in place.

6.1 E1 — Reliability of model-authored schemas

We assembled a 24-prompt corpus of app-creation requests (16 English, 8 Japanese; simple lists through recurrence-bearing and relational apps; four adversarial prompts), had an independent agent author each schema given the production authoring guide, and validated every result with the production validator itself—the same Zod schema and acceptance gates that gate discovery at runtime.

We ran the corpus three times with independent agents under an identical harness. The trials agree exactly: in each, the poem request was correctly declined and 22 of 23 authored schemas were valid on first attempt—**66 of 69 across trials (95.7%), with zero per-trial variance.**

Task	S	B1 (ablation)	B3 (codegen)
T1 create + use	completes	completes	completes
T2 fresh session	completes	cannot	completes
T3 invalid value	completes [†]	accepts silently [‡]	cannot
T4 recurrence	completes	cannot	degrades
T5 records → chart	completes	completes	completes
T6 note → obligation	completes	degrades	degrades
T7 summoned form	completes	completes	degrades
T8 corruption	completes	silently wrong	cannot
T9 temporal recall	completes	cannot	completes
T10 evolve schema	completes	degrades	completes

[†]via legal schema evolution—see below. [‡]cooperatively dodged in the live run; pinned by unit test. Verdicts are from single-trial runs with full transcripts in the evaluation tree.

Table 1: E2 verdicts: ten pre-registered tasks across the full system (S), the ablation (B1), and agentic code generation (B3).

Per-prompt outcomes are bimodal rather than noisy: 23 of 24 prompts succeeded in all three trials, and the one failure—the deliberately overspecified prompt placing a `file` field inside a `table` sub-schema, an invariant no author would guess—failed in all three, on the same path each time. The failure is a property of the prompt–language pair, not sampling luck. Given the validator’s path-precise error verbatim, the model repaired the schema in one attempt in all three trials. This is §5.4’s prevent-report-repair loop, observed—repeatedly. Semantic fidelity on the hard features was high and unprompted: the medication prompt received its 30-day spawn-on-completion; the chores prompt used the field-driven spawn variant with a frequency map—the schema language’s most obscure feature—correctly; both relational prompts declared cross-collection references. One honest negative: the vague prompt (“organize my life”) yielded a valid but questionable generic schema rather than a clarifying question—in all three trials, so the miss is systematic rather than sampled; partly an artifact of the harness’s one-shot format, and a prompt-guidance fix rather than a sampling one.

6.2 E2 — Does the runtime change what users can do?

Ten tasks were pre-registered with per-system predictions before any run (protocol in the evaluation tree), spanning creation, cross-session persistence, validation, recurrence, two cross-application compositions, agent-summoned forms, behind-the-back corruption, temporal recall, and schema evolution. Three scored systems (Table 1): **S**, the full system; **B1**, the ablation—the same build with persistence, record validation, and the reconciler disabled, reproducing the architecture of one-shot generative-UI systems under otherwise identical conditions (the same model, schema language, and renderer; we state why the closest published system cannot be operationalized directly and use the ablation in its place); **B3**, agentic code generation in a plain directory. A fourth natural comparison—a hosted assistant with memory—is discussed qualitatively below rather than scored: we did not observe one under the protocol, and an unobserved column in a scored table would invite exactly the constructed-to-win reading it deserves.

S completed 10 of 10. Three observations exceed the raw score. First, T3 revealed a third trust-boundary outcome: asked to write an out-of-enum value “exactly, with no substitution,” the agent neither wrote it nor refused—it *legally evolved the schema* through the validated edit path and then wrote the now-valid value. The boundary’s outcomes are prevent, repair, or renegotiate—

all validated. Second, in T4 the agent *predicted* the host’s behavior (“the host will auto-spawn September’s record... its reminder will appear 5 days before”) before the host did it—the author reasoning about its runtime. Third, T8’s corrupted record was quarantined at read, reported by the scan, and repaired by the agent with a disclosed rationale.

In these runs, B1’s deficits each tracked exactly one ablated component. With persistence gone, T2’s agent answered—verbatim—“*your reading list was empty until just now*”: the same agent, the same request that S completed, and the accumulation did not exist. With the reconciler gone, T4’s completed task produced no successor and no reminder state at all: the spawn declaration is inert JSON without the host that executes it. With the validation scan gone, T8’s corrupted record stayed silently wrong—no warning, no repair, no disclosure. The ties are equally load-bearing: T1, T5, and T7 complete identically in B1—consistent with generation and chat-layer capabilities owing nothing to the runtime, and the observed delta being the runtime and only the runtime. One honest finding: in *both* columns the cooperative author designed around the validator rather than violating it (B1’s agent simply included the requested value in its enum up front). Validation’s value is adversarial—behind-the-back corruption and authoring mistakes—not cooperative-path rejection.

B3 is capable but expensive, and never on duty. It built a genuinely good local app (T1), and a fresh session reused it by reading its code (T2)—but schema evolution took 17 tool calls and 299 seconds against S’s single validated turn, and the agent hand-rolled a backup file because nothing in its world guarantees data safety. Its recurrence logic was correct and inert: in its builder’s own words, “*nothing fires on its own.*”

The hosted assistant, qualitatively. From documented capabilities alone—memory features, scheduled tasks, canvas surfaces—a hosted assistant-with-memory approximates most of these behaviors conversationally—and some products do expose files, tasks, or app-state surfaces—but none of it lives in a user-owned, inspectable schema-and-record workspace: there is no schema or record the user can read, copy, or take elsewhere, so capabilities are re-derived from remembered context on the vendor’s terms. We do not score it, and its defining property is in any case orthogonal to this table: whatever such a product completes, it completes on the vendor’s premises—which is what E3 measures.

Eight of ten pre-registered predictions held; both misses (S-T3’s renegotiation, B1-T3’s cooperative dodge) are reported above.

6.3 E3 — What does a memory export carry?

Phase 1 inventoried a real workspace nurtured over several weeks of daily use (the author’s; aggregate counts only) against a pre-registered export scope—what memory-portability protocols transfer: conversation history and distilled context. The typed transfer matrix (Figure 4), with the workspace’s own directory layout as the coding scheme: the conversational layer rides in full (216 memory topics, 276 transcripts, 199 summaries); **zero of 43 applications, zero of 1,228 records, zero of 34 model-authored views, and zero of 88 automations survive in operative form.** No cross-type weighting is applied; moving the one generously-codable category (wiki pages, as exported documents) changes the artifact tallies and none of the functional zeros.

Phase 2 made the deficit functional. We migrated the E2 workspace by copying only the export scope into a fresh, fully-capable instance and replayed workflow questions the accumulation used to answer. **Zero of four replays completed.** The two partial recoveries are the finding: the assistant recovered the *fact* of a loan from its carried chat history while reporting the collection itself broken, and answered the retainer question with the system’s own diagnosis—“*no, you currently won’t get a reminder—the obligations collection that carried the 5-day-early reminder is gone.*” What a

What a memory-only export carries

Typed inventory of a workspace nurtured over several weeks; export scope = conversation history + distilled context (memory-portability class). No cross-type weighting.

Layer	Artifact type	Count	Verdict
Conversational	Memory topic files	216	● carried
	Chat transcripts	276	● carried (session metadata lost)
	Conversation summaries	199	● carried
Application	Collection schemas (the applications)	43	○ lost
	SKILL.md operating manuals	43	● degraded (text survives, function lost)
	Collection records	1,228	● degraded (prose at best, inoperative as data)
	Custom views (model-authored code)	34	○ lost
Knowledge	Wiki pages	153	● degraded (link graph, history, rendering lost)
	Wiki snapshot history	247	○ lost
Behavioral	Automations / scheduler entries	88	○ lost
	Reminder / recurrence runtime state	—	○ lost
	Feed definitions + ingest state	12	○ lost
Media	Attachments	51	○ lost
	Generated artifacts (charts, docs)	1,536	○ lost

Functionally: 0 of 43 applications, 0 of 1,228 operative records, 0 of 88 automations survive. What survives in full is exactly the layer the assistant's *conversations* live in — and none of the layers its *applications* live in.

● carried (operative) ● degraded (content survives, function lost) ○ lost

Figure 4: The E3 transfer matrix: what a memory-only export carries.

memory export carries is testimony, not capability: the migrated assistant can tell you about its former life; it cannot resume living it. Because the migrated host was deliberately un-ablated, the deficit is attributable to the export scope alone.

We state the tested claim precisely: *memory-only* portability protocols—the scope current proposals define—do not carry the accumulation. A richer export format could of course include schemas, records, views, and automations; we would welcome one, and note what it would be: a format that must carry applications, executable semantics, and host state to be adequate is a workspace, and portability of the workspace is precisely the local-first position this paper argues. The accumulation is more than the memory—not by degree, but by kind.

6.4 Threats to validity

Consolidated from the per-experiment disclosures. (1) *Model parity*: S and B1 ran the identical model inside the production agent loop, so the ablation delta is model-clean; B3 and the E1 authoring agents ran the evaluation session’s model, and if it is the stronger one the bias favors the baselines. Paper-grade runs must pin model IDs per column. (2) *The hosted assistant is discussed, not observed*; hosted feature sets move quickly, and improvements there deepen the very accumulation-on-premises dynamic §3 describes. (3) *Trial counts*: E1 was run as three independent trials per prompt (zero observed variance); the E2 task cells remain single-trial with per-task transcripts shipped, and repeating them with pinned model IDs is the first item of future work. (4) *Harness gaps*: E1 authoring ran outside the full product loop (same guidance, same validator, different shell); T7’s form could be summoned but not filled through the text-only bridge. (5) *Own-workspace effects*: E3 phase 1 uses the author’s workspace (disclosed); phase 2 uses a young synthetic accumulation. (6) The evaluation infrastructure—ablation switches and deterministic clock—ships in the open-source artifact, so every run here is reproducible from the public reposi-

tory.

7 The costs of home

The case for ownership would be suspect if it arrived free. It does not, and a system paper that argues local-first as engineering rather than ideology owes its readers the bill. We enumerate what home costs, and for each item state either the mitigation the artifact ships or the plain admission that the cost is currently borne by the user.

Setup. A hosted assistant is a login; ours is an install—a runtime, an authenticated model CLI, optional components for media and sandboxing. The mitigation is a one-command launcher; whether non-programmers get from install to a working application without help is untested here and named as future work (§8.4). The admission is that a login it is not, and some fraction of prospective users will stop here.

Backup. Ownership of the files is ownership of their durability. There is no vendor-side copy; a lost disk is a lost assistant. The plain-file substrate makes mitigation easy—the workspace is a directory, so any file-level backup or sync tool covers it, and the workspace is initialized as a git repository—but the system does not yet automate this, and an assistant into which a user pours years deserves automated, verified backup. We flag this as the most consequential unmitigated cost.

Availability and sync. The assistant lives on one machine. Relay-only remote access restores reach—a phone or messaging bridge converses with the assistant at home—but if the machine sleeps, the assistant sleeps, and there is no multi-device replica of the workspace. Mitigations exist at the edges (mobile-targeted views with default-deny write scopes); the general multi-device problem is real, is the strongest argument for the hosted alternative, and is honestly out of scope here—though we note the local-first literature has spent a decade on exactly this [11], and its results apply to a plain-file workspace unusually well.

Security. A local server with an agent that reads and writes files is attack surface that a hosted product would carry for you. The artifact’s postures—capability-scoped signed tokens for view code, opaque-origin sandboxing, a relay that stores nothing—cover the paths this paper describes, but a full audit is beyond its scope, and we do not claim otherwise.

Model dependence. The deepest honesty: local-first is not model-independence. The intelligence is rented from the same few providers a hosted assistant would use, with their pricing, terms, and availability. What ownership changes is what happens at the boundary: the workspace—records, schemas, manuals—is engine-neutral by construction, so swapping the model changes who animates the accumulation, not the accumulation itself. The veteran capability stays; the generalist is replaceable. We state this as an architectural property; benchmarking assistant quality across engine swaps is future work.

Adoption. Everything above compounds into a gap between the users who could benefit most and those who can install a local server today. We do not minimize this. The paper’s claim is not that home is where every user will live in 2026; it is that home must *exist* as a viable corner of the design space, open-source and demonstrated, so that the arrangement is chosen rather than defaulted into—and so that the packaging work that closes the gap has something worth packaging.

8 Discussion

8.1 What the evaluation taught us that the design did not

Three findings surprised us, and each sharpens a claim rather than merely supporting one. First, the trust boundary has a third outcome. We designed for prevent and repair; the agent discovered *renegotiate*—when an intent does not fit the schema, the cheapest legal move is often to evolve the schema through the validated edit path (§6.2, T3). The boundary’s real guarantee is not “the model’s writes are checked” but “every route to a live application passes a validator,” and the model is free to choose its route. Second, validation earns its keep adversarially, not cooperatively. In every live run, on both sides of the ablation, the author designed around the validator rather than fighting it; the validator’s observed value was catching authoring mistakes (E1’s sub-schema invariant) and behind-the-back corruption (T8)—the cases where no one is being careful. Third, memory carries testimony, not capability (§6.3)—a distinction we did not have words for until the migrated assistant produced both halves of it in one reply, recalling the fact of a reminder while diagnosing its own inability to deliver one.

8.2 The design space, revisited

Two of the artifact’s choices are points in a space rather than requirements of the thesis (§5.4). Access mediation is demonstrably policy—both the managed tool path and the raw-file escape hatch coexist today, and a stricter variant closes the hatch and moves all data enforcement into prevention, at the cost of the agent’s generic file-tool legibility. The substrate could likewise be an embedded relational database with ownership fully intact, trading human readability and diffability for indexed queries. We occupy the plain-files, direct-access corner because at personal scale—order 10^3 records in our own workspace—nothing needs an index, and a substrate natively legible to the user, to standard tools, and to the model is worth more than query performance. The principles argued here—model as author, host as runtime, accumulation owned by the user—hold at every corner. A reviewer who observes that plain files will not scale is correct, and has not disagreed with the paper.

8.3 Premium features, dissolved

A pattern worth one paragraph: what conventional software sells as its integration tier arose in our evaluation as the default mode of operation. Records-to-chart (T5), note-to-recurring-obligation (T6), and photo-to-ledger (§4) are, in SaaS terms, an export module, a workflow connector, and an OCR add-on; here each is one sentence, because capabilities are tools under one controller and tools compose. The practitioner literature already describes the economics of this unbundling at industry scale [2]; our contribution is only the mechanism stated plainly—the premium tier was the integration cost, and composition removes the cost, so the tier dissolves.

8.4 What this artifact cannot yet show

The nurturing claim is longitudinal, and this paper’s evidence is not: E1–E3 measure an architecture, not a life with one. Whether real users accumulate the way our dogfooded workspace did, whether accumulation measurably changes what their assistant can do for them, and where the gardening metaphor breaks—a plant does not leak, but an assistant’s memory of you has failure modes no garden has—are questions for a prospective multi-week study, for which the only current evidence anywhere is a single self-described-illustrative case study [26]. A formative usability study

with non-programmers is the natural first step; the longitudinal study is the second paper. We are also explicit that ownership does not equal model-independence (§7): the engine is rented, and only the workspace’s engine-neutrality is ours to guarantee.

8.5 Which parts travel

For builders of other agent hosts, we believe three patterns generalize beyond this artifact: enforcement tiered by consequence (prevent applications, repair data, contain code—§5.4); convergent, idempotent reconciliation as the price of admitting users and models to the same substrate (§5.5); and the two-artifacts pattern—pair every machine-executed schema with a model-facing operating manual, so the system’s two runtimes each get an artifact in their own language (§5.1). None of the three requires plain files, collections, or MulmoClaude.

9 Conclusion

An assistant that knows everything about you and supports you around the clock is not sold anywhere. You cannot buy one—and, we have argued, you should not board one out, because the same accumulation that makes it valuable is what makes leaving expensive, and defaults are deciding today where that accumulation lives. This paper offered a working alternative default: an architecture in which the model authors small declarative applications, a host the user runs executes them, and everything that accumulates—records, schemas, manuals, history—sits as plain files in a workspace the user owns. In single-trial runs whose transcripts and infrastructure ship inside the open-source artifact, the evaluation showed the architecture trustworthy where it must be (22/23 first-attempt valid schemas; invalid ones never live), its runtime the source of the capabilities that matter (each ablation deficit mapped to one removed component), and memory-only portability moving testimony while leaving capability behind (0 of 4 workflows survived migration).

The limitations are stated where they arise and bear repeating once: the trials are single runs pending repetition with pinned models; the hosted alternative is discussed rather than observed; and the claim that people will in fact nurture such an assistant over years is not yet evidence but the question this architecture was built to make answerable. The substrate for that study now exists. The upbringing is the user’s own.

References

- [1] Kenneth J. Arrow. Economic welfare and the allocation of resources for invention. In *The Rate and Direction of Inventive Activity: Economic and Social Factors*, pages 609–626. Princeton University Press, 1962.
- [2] Bain & Company. Will agentic AI disrupt SaaS? Bain Technology Report, 2025. URL <https://www.bain.com/insights/will-agentic-ai-disrupt-saas-technology-report-2025/>.
- [3] Marcel Borowski, Luke Murray, Rolf Bagge, Janus Bager Kristensen, Arvind Satyanarayan, and Clemens Nylandsted Klokmose. Varv: Reprogrammable interactive software as a declarative data structure. In *Proceedings of the 2022 CHI Conference on Human Factors in Computing Systems*, 2022. doi: 10.1145/3491102.3502064. Verified via Crossref, 2026-07-13.
- [4] Yining Cao, Peiling Jiang, and Haijun Xia. Generative and malleable user interfaces with generative and evolving task-driven data model. In *Proceedings of the 2025 CHI Conference*

- on *Human Factors in Computing Systems*, 2025. doi: 10.1145/3706598.3713285. The Jelly system; also arXiv:2503.04084. Verified via Crossref/arXiv API, 2026-07-13.
- [5] Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. Mem0: Building production-ready AI agents with scalable long-term memory, 2025. Verified via arXiv API, 2026-07-13.
 - [6] CopilotKit. AG-UI: The agent–user interaction protocol. Protocol documentation, 2025. URL <https://docs.ag-ui.com/introduction>.
 - [7] Google. Introducing A2UI: An open project for agent-driven interfaces. Google Developers Blog, 2025. URL <https://developers.googleblog.com/introducing-a2ui-an-open-project-for-agent-driven-interfaces/>.
 - [8] F. A. Hayek. The use of knowledge in society. *The American Economic Review*, 35(4):519–530, 1945.
 - [9] Nobukatsu Hojo, Kazutoshi Shinoda, Yoshihiro Yamazaki, Keita Suzuki, et al. GenerativeGUI: Dynamic GUI generation leveraging LLMs for enhanced user interaction on chat interfaces. In *Extended Abstracts of the CHI Conference on Human Factors in Computing Systems*, 2025. doi: 10.1145/3706599.3719743. Verified via Crossref, 2026-07-13.
 - [10] Paul Klemperer. Competition when consumers have switching costs: An overview with applications to industrial organization, macroeconomics, and international trade. *The Review of Economic Studies*, 62(4):515–539, 1995.
 - [11] Martin Kleppmann, Adam Wiggins, Peter van Hardenberg, and Mark McGranaghan. Local-first software: You own your data, in spite of the cloud. In *Proceedings of the 2019 ACM SIGPLAN International Symposium on New Ideas, New Paradigms, and Reflections on Programming and Software (Onward!)*, 2019. doi: 10.1145/3359591.3359737.
 - [12] Yaniv Leviathan, Dani Valevski, Matan Kalman, Danny Lumen, et al. Generative UI: LLMs are effective UI generators, 2026. Verified via arXiv API, 2026-07-13.
 - [13] Geoffrey Litt, Max Schoening, Paul Shen, and Paul Sonnentag. Potluck: Dynamic documents as personal software. Ink & Switch essay, October 2022, 2022. URL <https://www.inkandswitch.com/potluck/>. Author list verified against the published essay, 2026-07-13.
 - [14] Geoffrey Litt, Joshua Horowitz, Peter van Hardenberg, and Todd Matthews. Malleable software: Restoring user agency in a world of locked-down apps. Ink & Switch essay, 2025. URL <https://www.inkandswitch.com/essay/malleable-software/>.
 - [15] Aikaterina Manoli, Janet V. T. Pauketat, Jacy Reese Anthis, et al. Characterizing relationships with companion and assistant large language models. In *Companion Publication of the 2025 Conference on Computer-Supported Cooperative Work and Social Computing (CSCW)*, 2025. doi: 10.1145/3715070.3749245. arXiv version: Digital Companionship: Overlapping Uses of AI Companions and AI Assistants, arXiv:2510.15905. Verified via Crossref/arXiv API, 2026-07-13.
 - [16] Hari Masoor. SAMEP: A secure protocol for persistent context sharing across AI agents, 2025. Verified via arXiv API, 2026-07-13.

- [17] Model Context Protocol. MCP Apps: Bringing UI capabilities to MCP clients. Model Context Protocol blog, January 26, 2026, 2026. URL <https://blog.modelcontextprotocol.io/posts/2026-01-26-mcp-apps/>.
- [18] Satya Nadella. The reverse information paradox. Post on X, July 2026, 2026. URL <https://x.com/satyanadella/status/2076323181154230284>. Practitioner essay; cite a durable mirror if one is published.
- [19] Yohei Nakajima. The log is the agent: Event-sourced reactive graphs for auditable, forkable agentic systems, 2026. arXiv:2605.21997.
- [20] Charles Packer, Sarah Wooders, Kevin Lin, Vivian Fang, Shishir G. Patil, Ion Stoica, and Joseph E. Gonzalez. MemGPT: Towards LLMs as operating systems, 2023. arXiv:2310.08560.
- [21] Santhosh Kumar Ravindran. Portable agent memory: A protocol for cryptographically-verified memory transfer, 2026. Verified via arXiv API, 2026-07-13.
- [22] Carl Shapiro and Hal R. Varian. *Information Rules: A Strategic Guide to the Network Economy*. Harvard Business School Press, 1998.
- [23] Robin Sloan. An app can be a home-cooked meal. Blog post, 2020. URL <https://www.robinsloan.com/notes/home-cooked-app/>.
- [24] Mulong Xie and Yang Xie. Software as content: Dynamic applications as the human-agent interaction layer, 2026. arXiv:2603.21334.
- [25] Lechen Zhang, Jiarui Liu, and Tal August. Re-centering humans in LLM personalization, 2026. Verified via arXiv API, 2026-07-13.
- [26] Linghao Zhang. Nurture-first agent development: Building domain-expert AI agents through conversational knowledge crystallization, 2026. Verified via arXiv API, 2026-07-13.
- [27] Wanjun Zhong, Lianghong Guo, Qiqi Gao, He Ye, and Yanlin Wang. MemoryBank: Enhancing large language models with long-term memory. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2024. Also arXiv:2305.10250. Verified via arXiv API, 2026-07-13.