





//  par


# void foo()


# void bar()

baz


### 42; throw

# void baz()

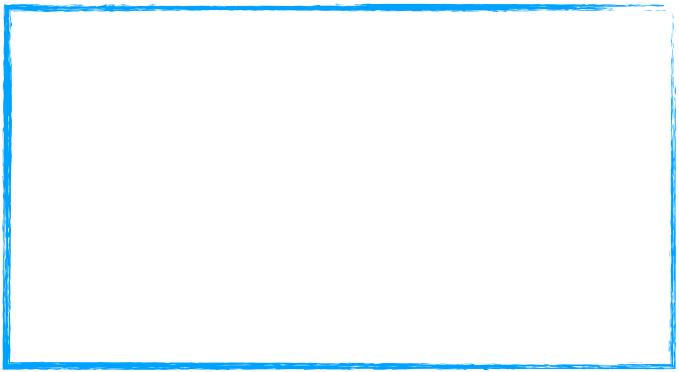

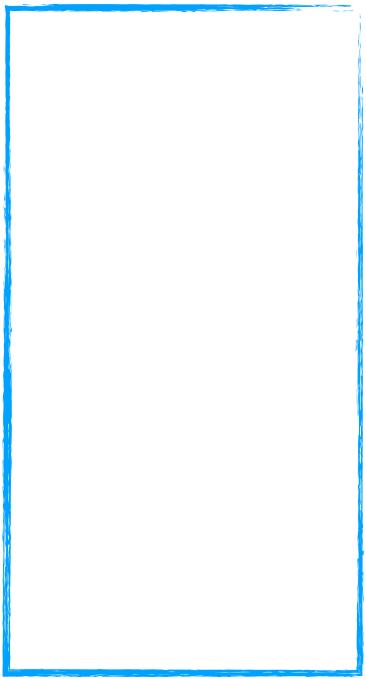

## **Local variables**

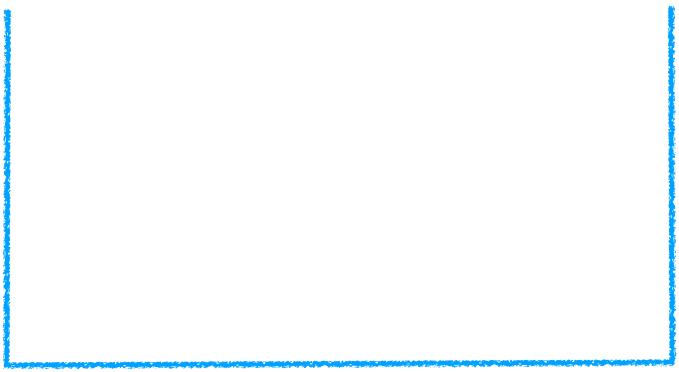

## **Local variables**





11 )



bar



Oa

## Local variables











