



```
_Unwind_Reason_Code (*__gxx_personality_v0)  
    (int version,  
     _Unwind_Action actions,  
     uint64_t exceptionClass,  
     struct _Unwind_Exception *exceptionObject,  
     struct _Unwind_Context *context);
```



# UNRESEARCHED

---

Unwinding-Phase 1





Local variables






Saved IP

Saved IP

**\_URC\_HANDLER\_FOUND**

# Unwinding - Phase1

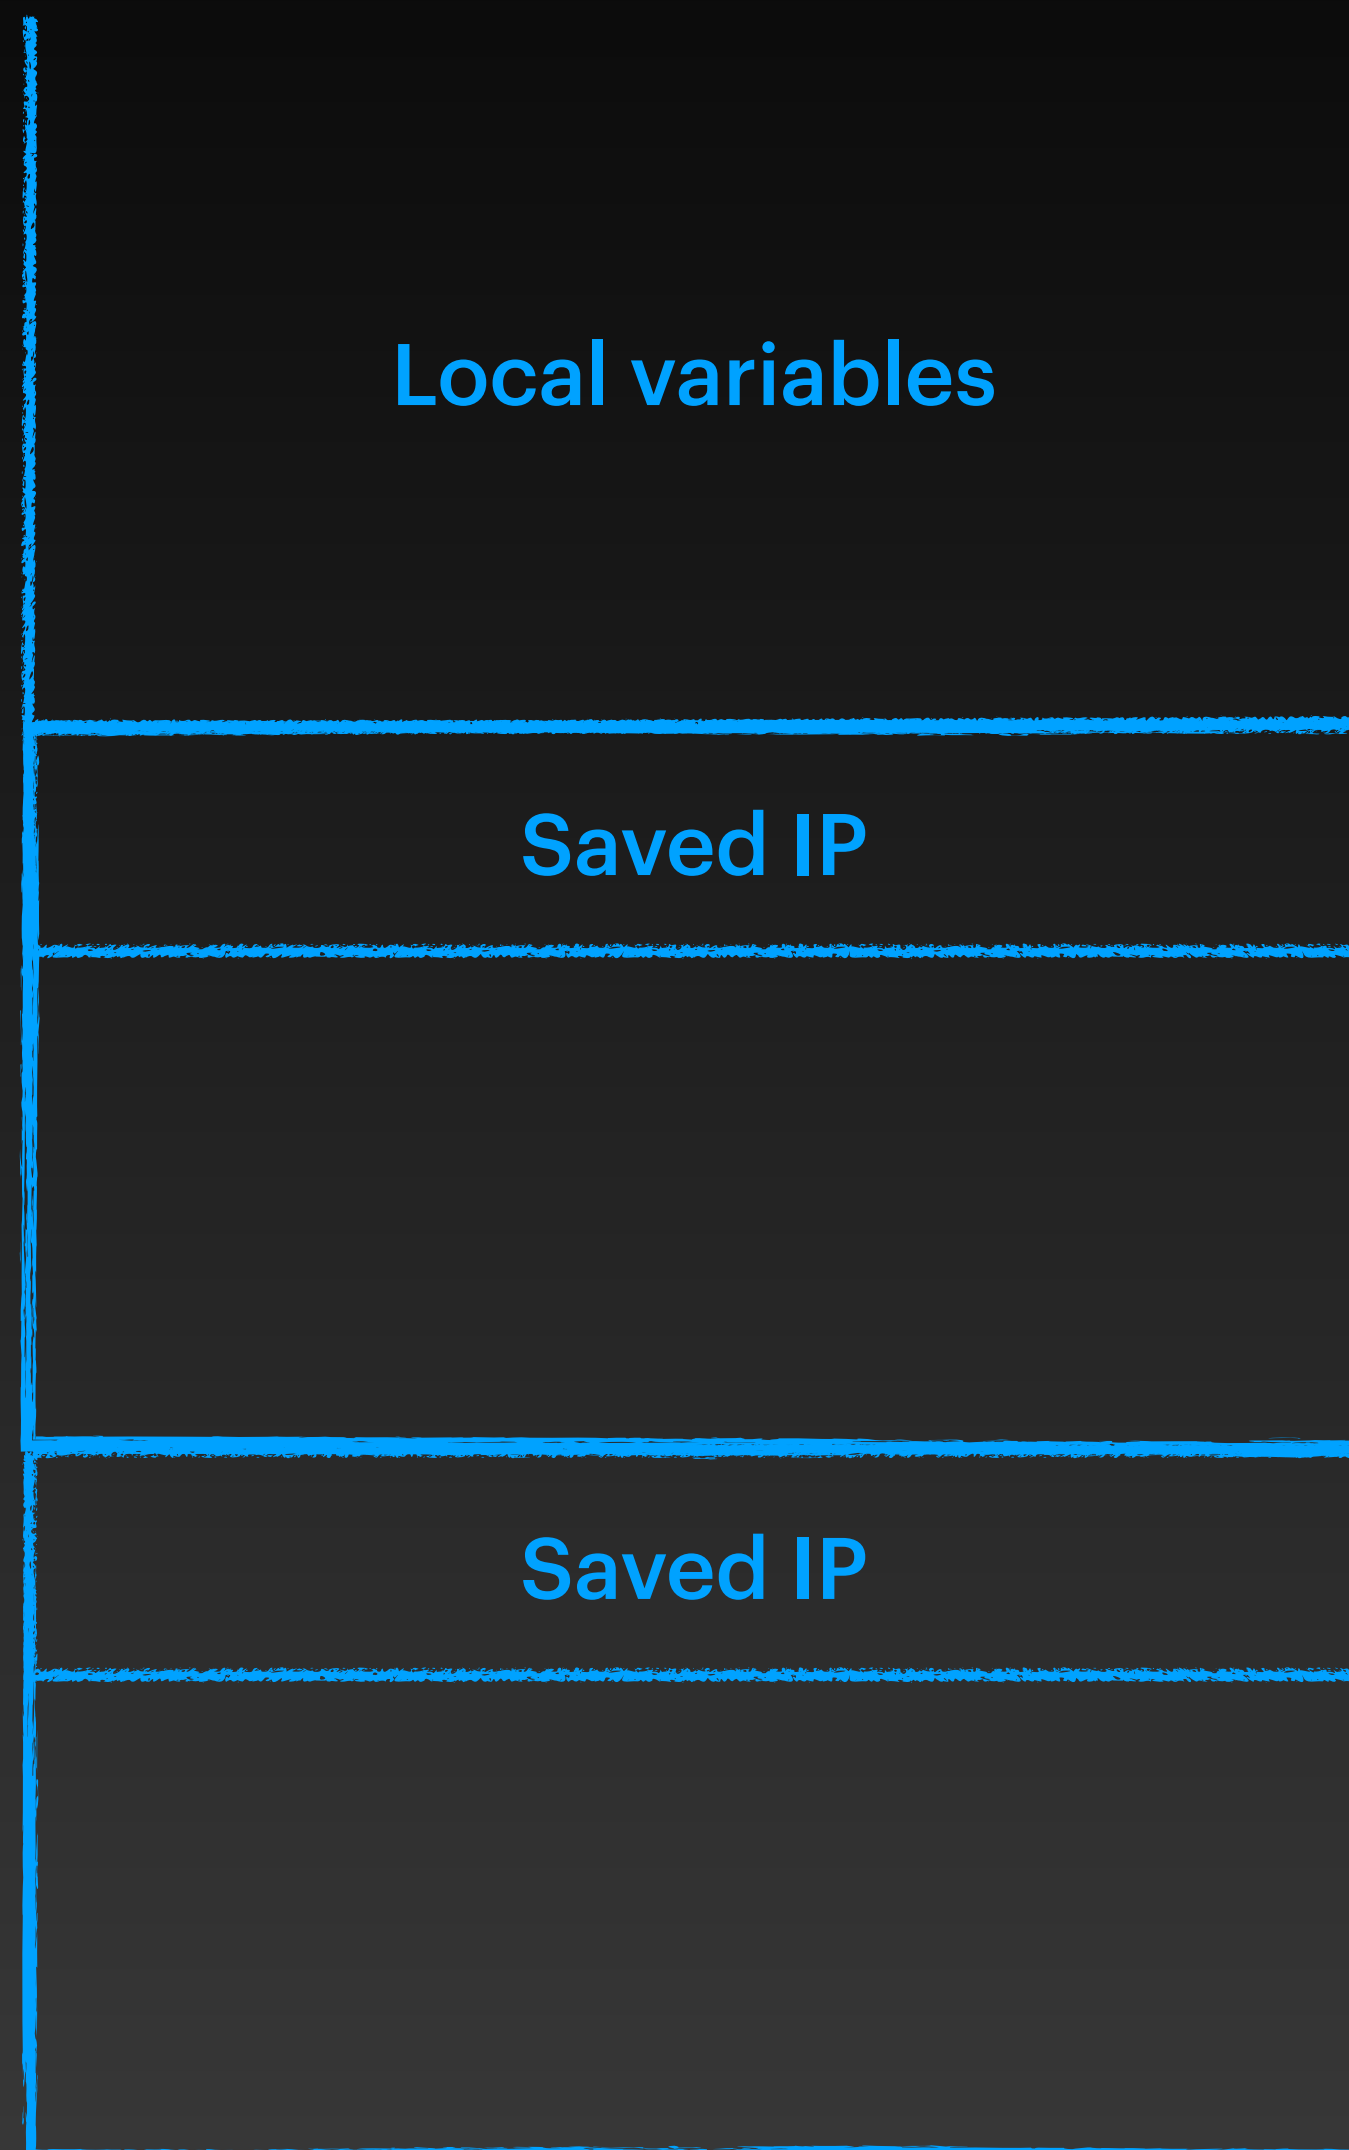

```
_Unwind_Reason_Code (*__gxx_personality_v0)
(int version,
 _Unwind_Action actions,
 uint64 exceptionClass,
 struct _Unwind_Exception *exceptionObject,
 struct _Unwind_Context *context);
```

`_UA_SEARCH_PHASE`

- Check frame for valid exception handler
- If so, return `_URC_HANDLER_FOUND`

# Unwinding - Phase2

Local variables

Saved IP

Saved IP

```
_Unwind_Reason_Code (*__gxx_personality_v0)
(int version,
 _Unwind_Action actions,
 uint64 exceptionClass,
 struct _Unwind_Exception *exceptionObject,
 struct _Unwind_Context *context);
```