







```
void foo() {
// . . .
bar();
```

```
void bar() {
// . . .
baz();
```

```
void baz() {
// . . .
throw 42;
```

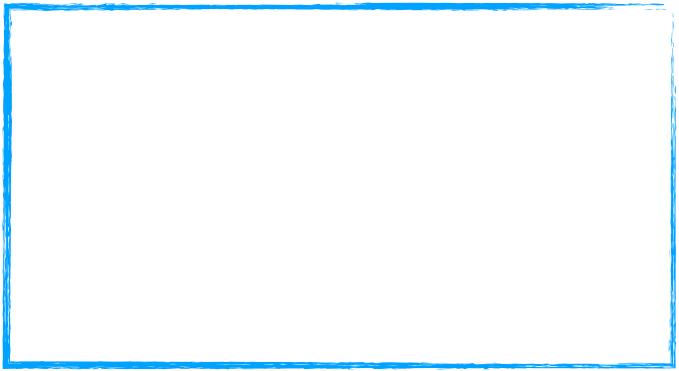

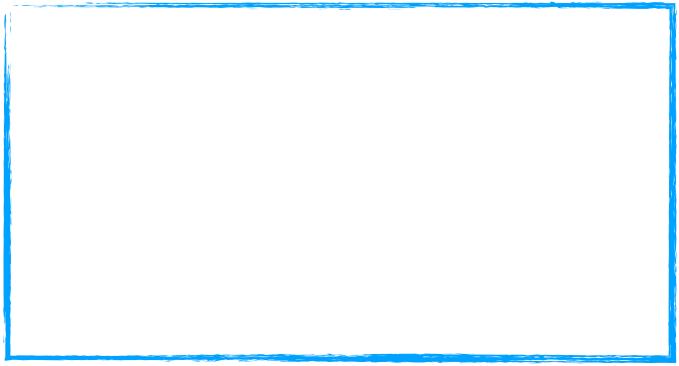

### **Local variables**



### **Local variables**







### **High addresses**





bai



### **Local variables**



# Saved FP

// 



par


### void foo()

baz

### void bar()

### void baz()

#### 42; throw

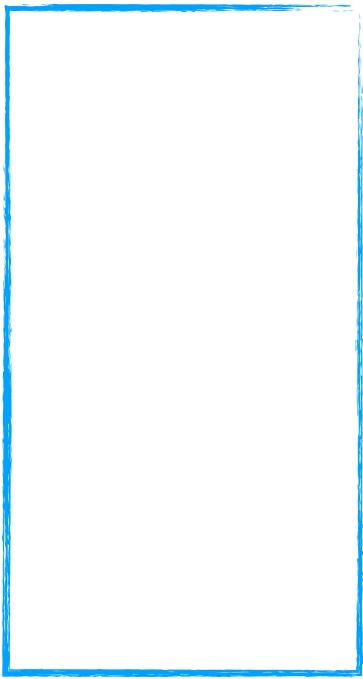



### Saved IP



### ave





### Saved IP



### Saved

## -tomit-trame-pointer