


## CSSE373: Project Milestone 1

Michael Royappa and Chris Sadler

5-4-15

1.

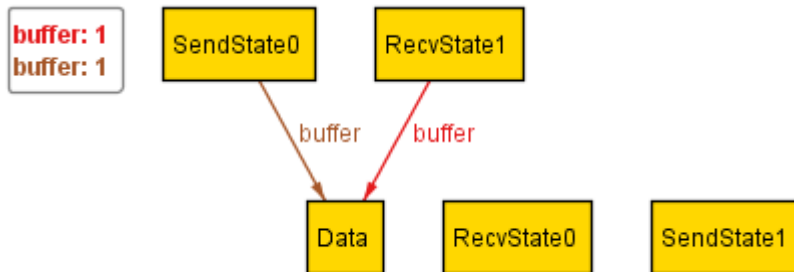

SendState0 shows that all Data is in the buffer, while SendState1 shows the Data has been sent and is no longer in the buffer. Likewise, RecvState0 starts out empty, and RecvState1 contains the data. This is the expected behavior, since the sender should start out with a full buffer and end with an empty one, while the receiver should start with an empty buffer and end with a full one.

2. We did not get around to showing a way data can't be transferred in time.