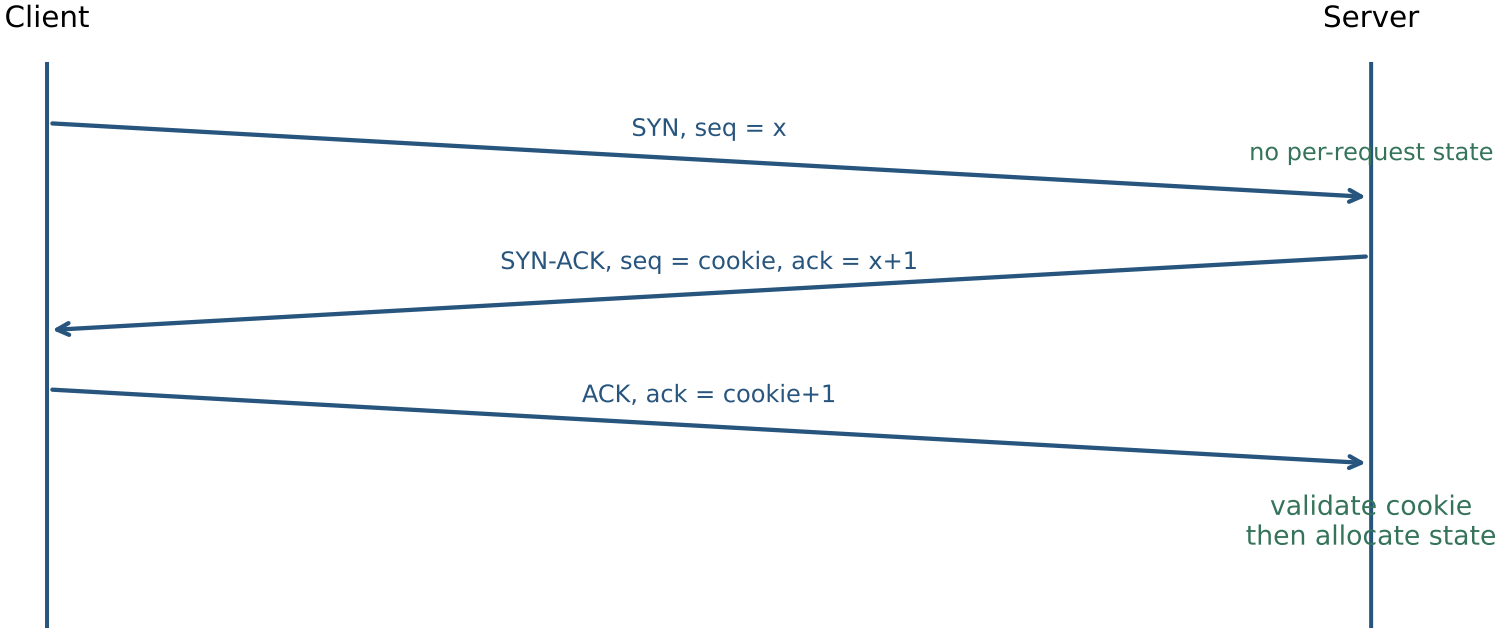
Client
Server
SYN, seq = x
no per-request state
SYN-ACK, seq = cookie, ack = x+1
ACK, ack = cookie+1
validate cookie
then allocate state