

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

**Batch: A1**

**Roll No.: 16010120015**

**16010120013**

**16010120020**

**Experiment / assignment / tutorial No. 5**

**Title: To develop UML diagrams for a selected project**

---

**Aim:** To learn and understand the way of creating various UML diagrams for requirement analysis

---

**CO 2:** Analyse the software requirements and Model the defined problem with the help of UML diagram.

---

## **Books/ Journals/ Websites referred:**

1. Roger Pressman, "Software Engineering", sixth edition, Tata McGraw Hill.
  2. System Analysis & Design by Satzinger, Jackson and Burd, Cengage Learning, 2007
  3. System Analysis and Design Methods by Jeffery I. Whitten, Lonnie D Bentley, McGraw Hill, 7th edition.
  4. System Analysis and Design by Alan Dennis, Barbara H. Wixom, Roberta M. Roth, Wiley India 4th edition
  5. [http://en.wikipedia.org/wiki/Software\\_requirements\\_specification](http://en.wikipedia.org/wiki/Software_requirements_specification)
  6. [http://en.wikipedia.org/wiki/Use\\_case](http://en.wikipedia.org/wiki/Use_case)
- 

## **Pre Lab/ Prior Concepts:**

In software and systems engineering, a **use case** is a list of steps, typically defining interactions between a role (known in Unified Modeling Language (UML) as an "actor") and a system, to achieve a goal. The actor can be a human or an external system.

## K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

In systems engineering, use cases are used at a higher level than within software engineering, often representing missions or stakeholder goals. The detailed requirements may then be captured in Systems Modeling Language (SysML) or as contractual statements.

As an important requirement technique, use cases have been widely used in modern software engineering over the last two decades. Use case driven development is a key characteristic of process models and frameworks like Unified Process (UP), Rational Unified Process (RUP), Oracle Unified Method (OUM), etc. With its iterative and evolutionary nature, use case is also a good fit for agile development.

Use case diagrams

Use case diagrams belong to the category of behavioural diagram of UML diagrams. Use case diagrams aim to present a graphical overview of the functionality provided by the system. It consists of a set of actions (referred to as use cases) that the concerned system can perform, one or more actors, and dependencies among them.

Actor

An actor can be defined as “an object or set of objects, external to the system, which interacts with the system to get some meaningful work done. Actors could be human, devices, or even other systems.”

For example, consider the case where a customer withdraws cash from an ATM. Here, customer is a human actor.

Actors can be classified as below

**Primary actor:** They are principal users of the system, who fulfil their goal by availing some service from the system. For example, a customer uses an ATM to withdraw cash when he needs it. A customer is the primary actor here.

**Supporting actor:** They render some kind of service to the system. "Bank representatives", who replenishes the stock of cash, is such an example. It may be noted that replenishing stock of cash in an ATM is not the prime functionality of an ATM.

In a use case diagram primary actors are usually drawn on the top left side of the diagram.

Use Case

A use case is simply [1] a functionality provided by a system.

Continuing with the example of the ATM, withdraw cash is a functionality that the ATM provides. Therefore, this is a use case. Other possible use cases includes, check balance, change PIN, and so on.

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

Use cases include both successful and unsuccessful scenarios of user interactions with the system. For example, authentication of a customer by the ATM would fail if he enters wrong PIN. In such case, an error message is displayed on the screen of the ATM.

## Subject

Subject is simply [iii] the system under consideration. Use cases apply to a subject. For example, an ATM is a subject, having multiple use cases, and multiple actors interact with it. However, one should be careful of external systems interacting with the subject as actors.

## Graphical Representation

An actor is represented by a stick figure and name of the actor is written below it. A use case is depicted by an ellipse and name of the use case is written inside it. The subject is shown by drawing a rectangle. Label for the system could be put inside it. Use cases are drawn inside the rectangle, and actors are drawn outside the rectangle.

cases, and multiple actors interact with it. However, one should be careful of external systems interacting with the subject as actors.

### Graphical Representation

An actor is represented by a stick figure and name of the actor is written below it. A use case is depicted by an ellipse and name of the use case is written inside it. The subject is shown by drawing a rectangle. Label for the system could be put inside it. Use cases are drawn inside the rectangle, and actors are drawn outside the rectangle, as shown in figure - 01.

Figure - 01: A use case diagram for a book store

### Association between Actors and Use Cases

A use case is triggered by an actor. Actors and use cases are connected through binary associations indicating that the two communicates through message passing.

An actor must be associated with at least one use case. Similarly, a given use case must be associated with at least one actor. Association among the actors are usually not shown. However, one can depict the class hierarchy among actors.

### Use Case Relationships

Three types of relationships exist among use cases:

- Include relationship
- Extend relationship
- Use case generalization

### Include Relationship

Include relationships are used to depict common behaviour that are shared by multiple use cases. This could be considered analogous to writing functions in a program in order to avoid repetition of writing the same code. Such a function would be called from different points

## Association between Actors and Use Cases

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

A use case is triggered by an actor. Actors and use cases are connected through binary associations indicating that the two communicate through message passing.

An actor must be associated with at least one use case. Similarly, a given use case must be associated with at least one actor. Association among the actors are usually not shown. However, one can depict the class hierarchy among actors.

## Use Case Relationships

Three types of relationships exist among use cases:

Include relationship

Extend relationship


Use case generalization

Include Relationship

Include relationships are used to depict common behaviour that are shared by multiple use cases. This could be considered analogous to writing functions in a program in order to avoid repetition of writing the same code. Such a function would be called from different points within the program.

## Example

For example, consider an email application. A user can send a new mail, reply to an email he has received, or forward an email. However, in each of these three cases, the user must be logged in to perform those actions. Thus, we could have a login use case, which is included by compose mail, reply, and forward email use cases

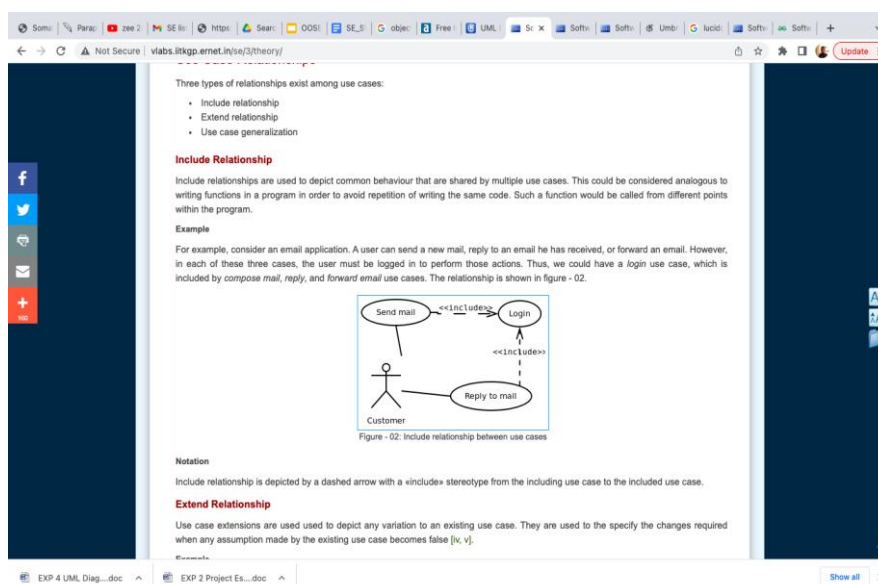

Include relationship between use cases Notation


# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

Include relationship is depicted by a dashed arrow with a «include» stereotype from the including use case to the included use case.

## Extend Relationship

Use case extensions are used to depict any variation to an existing use case. They are used to specify the changes required when any assumption made by the existing use case becomes false [iv, v].

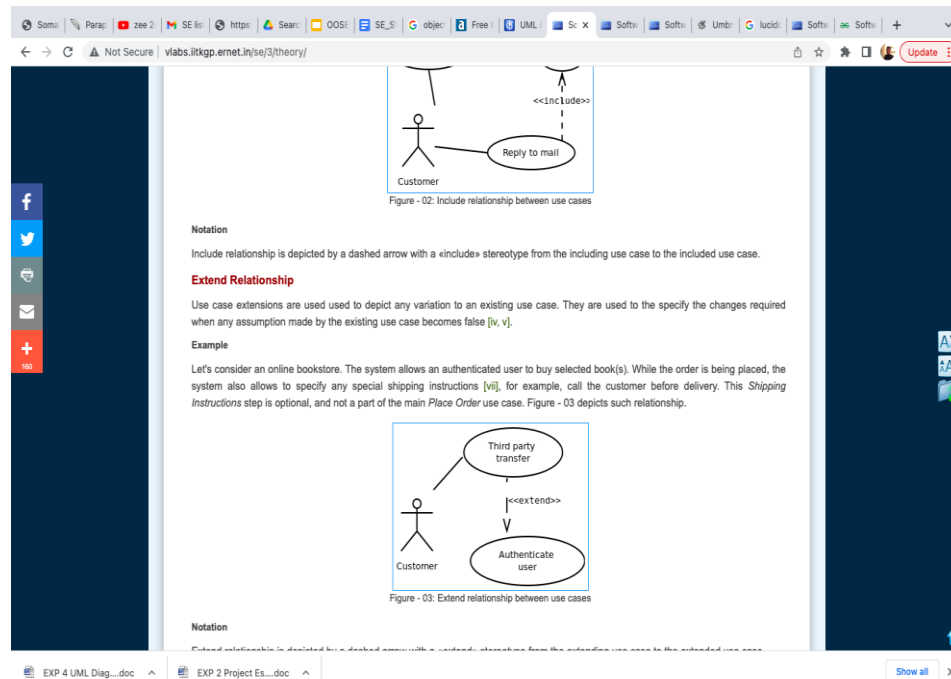


## Generalization Relationship

Generalization relationship are used to represent the inheritance between use cases. A derived use case specializes some functionality it has already inherited from the base use case. Example to illustrate this, consider a graphical application that allows users to draw polygons. We could have a use case draw polygon. Now, rectangle is a particular instance of polygon having four sides at right angles to each other. So, the use case draw rectangle inherits the properties of the use case draw polygon and overrides its drawing method. This is an example of generalization relationship. Similarly, a generalization relationship exists between draw rectangle and draw square use cases.

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

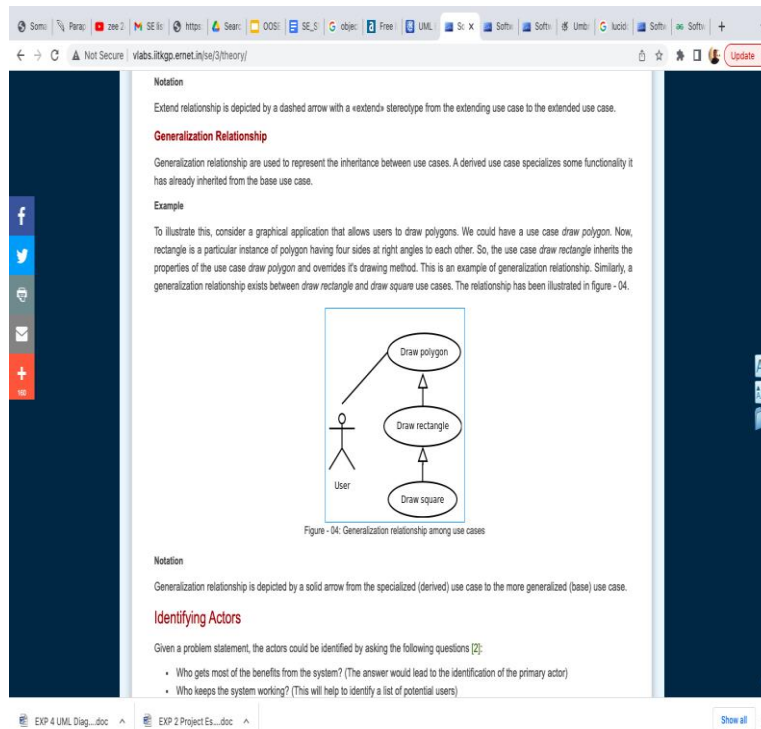

Generalization relationship is depicted by a solid arrow from the specialized (derived) use case to the more generalized (base) use case.

## Identifying Actors

Given a problem statement, the actors could be identified by asking the following questions [2]:

Who gets most of the benefits from the system? (The answer would lead to the identification of the primary actor)

Who keeps the system working? (This will help to identify a list of potential users)

What other software / hardware does the system interact with?

Any interface (interaction) between the concerned system and any other system?

## Identifying Use cases

Once the primary and secondary actors have been identified, we have to find out their goals i.e. what are the functionality they can obtain from the system. Any use case name should start with a verb like, "Check balance".

## Guidelines for drawing Use Case diagrams

Following general guidelines could be kept in mind while trying to draw a use case diagram :

- Determine the system boundary

## **K. J. Somaiya College of Engineering, Mumbai-77**

(A Constituent college of Somaiya Vidyavihar University)

- Ensure that individual actors have well-defined purpose
- Use cases identified should let some meaningful work done by the actors
- Associate the actors and use cases -- there shouldn't be any actor or use case floating without any connection
- Use include relationship to encapsulate common behaviour among use cases , if any

Capturing the dynamic view of a system is very important for a developer to develop the logic for a system. State chart diagrams and activity diagrams are two popular UML diagram to visualize the dynamic behaviour of an information system.

Different components of activity diagram and state chart diagram can be used to represent the dynamic nature of an information system.

### **Activity Diagrams**

Activity diagrams fall under the category of behavioural diagrams in Unified Modelling Language. It is a high level diagram used to visually represent the flow of control in a system. It has similarities with traditional flow charts. However, it is more powerful than a simple flow chart since it can represent various other concepts like concurrent activities, their joining, and so on [vii, viii].

Activity diagrams, however, cannot depict the message passing among related objects. As such, it can't be directly translated into code. These kind of diagrams are suitable for confirming the logic to be implemented with the business users. These diagrams are typically used when the business logic is complex. In simple scenarios it can be avoided entirely [ix].

#### **Components of an Activity Diagram**

Below we describe the building blocks of an activity diagram.

##### **Activity**

An activity denotes a particular action taken in the logical flow of control. This could simply be invocation of a mathematical function, alter an object's properties and so on [x]. An activity is represented with a rounded rectangle, as shown in table-01. A label inside the rectangle identifies the corresponding activity.

There are two special type of activity nodes: initial and final. They are represented with a filled circle, and a filled in circle with a border respectively (table-01). Initial node represents the starting point of a flow in an activity diagram. There could be multiple

# **K. J. Somaiya College of Engineering, Mumbai-77**

(A Constituent college of Somaiya Vidyavihar University)

initial nodes, which means that invoking that particular activity diagram would initiate multiple flows.

A final node represents the end point of all activities. Like an initial node, there could be multiple final nodes. Any transition reaching a final node would stop all activities.

## **Flow**

A flow (also termed as edge, or transition) is represented with a directed arrow. This is used to depict transfer of control from one activity to another, or to other types of components, as we will see below. A flow is often accompanied with a label, called the guard condition, indicating the necessary condition for the transition to happen. The syntax to depict it is [guard condition].

## **Decision**

A decision node, represented with a diamond, is a point where a single flow enters and two or more flows leave. The control flow can follow only one of the outgoing paths. The outgoing edges often have guard conditions indicating true-false or if-then-else conditions. However, they can be omitted in obvious cases. The input edge could also have guard conditions. Alternately, a note can be attached to the decision node indicating the condition to be tested.

## **Merge**

This is represented with a diamond shape, with two or more flows entering, and a single flow leaving out. A merge node represents the point where at least a single control should reach before further processing could continue.

## **Fork**

Fork is a point where parallel activities begin. For example, when a student has been registered with a college, he can in parallel apply for student ID card and library card. A fork is graphically depicted with a black bar, with a single flow entering and multiple flows leaving out.

## **Join**

A join is depicted with a black bar, with multiple input flows, but a single output flow. Physically it represents the synchronization of all concurrent activities. Unlike a merge, in case of a join all of the incoming controls must be completed before any further progress could be made. For example, a sales order is closed only when the customer has received the product, and the sales company has received its payment.

## **Note**



## **K. J. Somaiya College of Engineering, Mumbai-77**

(A Constituent college of Somaiya Vidyavihar University)

UML allows attaching a note to different components of a diagram to present some textual information. The information could simply be a comment or may be some constraint. A note can be attached to a decision point, for example, to indicate the branching criteria.

### **Partition**

Different components of an activity diagram can be logically grouped into different areas, called partitions or swim-lanes. They often correspond to different units of an organization or different actors. The drawing area can be partitioned into multiple compartments using vertical (or horizontal) parallel lines. Partitions in an activity diagram are not mandatory.

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

Different components of an activity diagram can be logically grouped into different areas, called partitions or swimlanes. They often correspond to different units of an organization or different actors. The drawing area can be partitioned into multiple compartments using vertical (or horizontal) parallel lines. Partitions in an activity diagram are not mandatory.

The following table shows commonly used components with a typical activity diagram.

Component	Graphical Notation
Activity	
Flow	
Decision	
Merge	
Fork	

EXP 4 UML Diag...doc    EXP 2 Project Es...doc    Show all

Table 01: Typical components used in an activity diagram

Apart from the above stated components, there are few other components as well (representing events, sending of signals, nested activity diagrams), which won't be discussed here. The reader is suggested to go through [4] for further knowledge.

**A Simple Example**

Figure-04 shows a simple activity diagram with two activities. The figure depicts two stages of a form submission. At first a form is filled up with relevant and correct information. Check it is verified that there is no error in the form, it is then submitted. The two other symbols shown in the figure are the initial node (black filled circle), and final node (circle hollow circle with inner filled circle). It may be noted that there could be zero or more final node(s) in an activity diagram [4].

EXP 4 UML Diag...doc    EXP 2 Project Es...doc    Show all

The following general guidelines could be followed to pictorially represent a complex logic.

- Identify tiny pieces of work being performed by the system
- Identify the next logical activity that should be performed
- Think about all those conditions that should be made, and all those constraints that should be satisfied, before one can move to the next activity

## **K. J. Somaiya College of Engineering, Mumbai-77**

(A Constituent college of Somaiya Vidyavihar University)

- Put non-trivial guard conditions on the edges to avoid confusion

In UML, class diagrams are one of six types of structural diagram. Class diagrams are fundamental to the object modelling process and model the static structure of a system. Depending on the complexity of a system, you can use a single class diagram to model an entire system, or you can use several class diagrams to model the components of a system.

Class diagrams are the blueprints of your system or subsystem. You can use class diagrams to model the objects that make up the system, to display the relationships between the objects, and to describe what those objects do and the services that they provide.

In its basic form, an activity diagram is a simple and intuitive illustration of what happens in a workflow, what activities can be done in parallel, and whether there are alternative paths through the workflow. Activity diagrams as defined in the Unified Modeling Language are derived from various techniques to visually illustrate workflows. Activity diagrams are used to visualize the workflow of a business use case. A complete workflow description will have a basic flow, and one or several alternative flows. This workflow has a structure that we can define textually, using informal if, if-then-else, or does-until statements of various kinds. For a simple workflow with a simple structure such textual definitions may be quite sufficient, but in the case of more complex structures, activity diagrams help to clarify and make more apparent what the workflow is. Historically, activity diagramming techniques have mostly been used in the business process modeling domain, but this article will also briefly discuss how you can use it in the system modeling domain.

A sequence diagram is a graphical view of a scenario that shows object interaction in a time-based sequence of what happens first, what happens next.

Sequence diagrams establish the roles of objects and help provide essential information to determine class responsibilities and interfaces.

### **Requirement Modeling:**


*Significance of every diagram is to be written*

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

## 1. Use Case

Use case diagrams are created when you are looking at the requirements of your system or program. They represent the functions or features, the actors and how these relate to each other (their relationships).

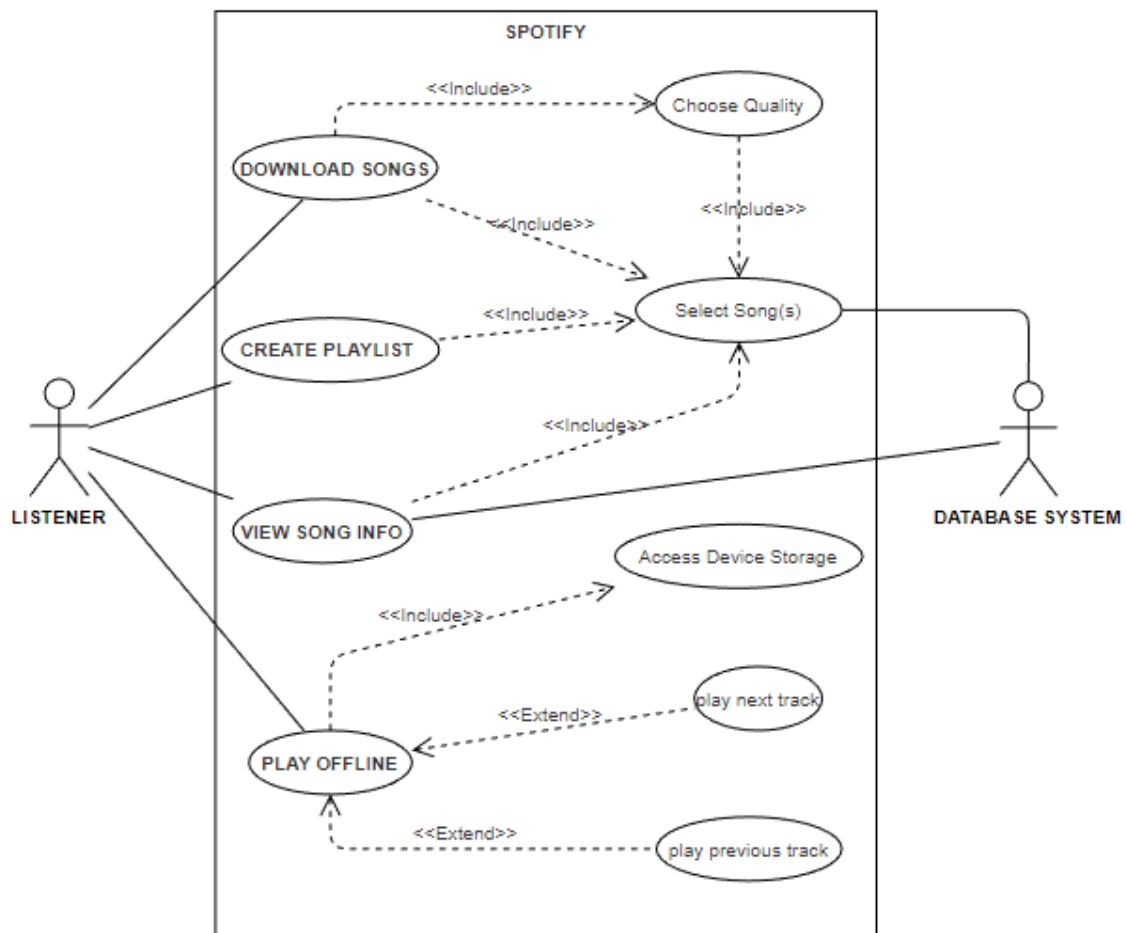


## 2. Activity Diagram

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

Activity diagrams model the behavior of users and systems as they follow a process. They are a type of flow chart or workflow, but they use slightly different shapes.

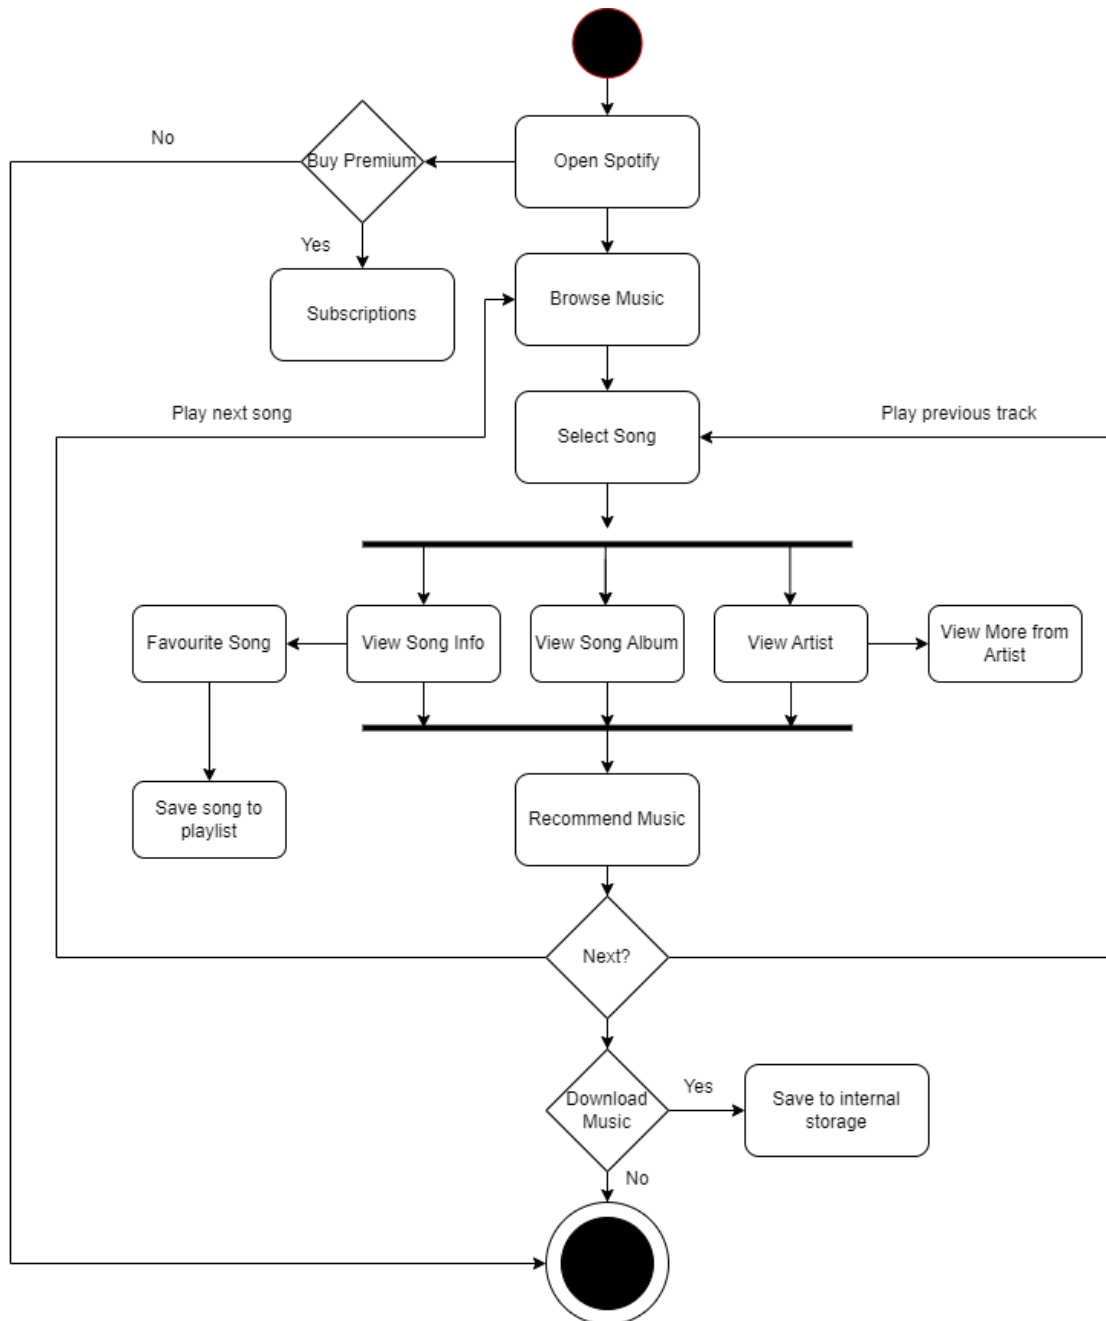


## 3. Class Diagram

# K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

Object oriented programming languages are based on classes and the relationships between them. UML class diagram notation was developed to represent these programs visually. Classes contain their attributes (their data) and behaviors (member functions), and are related to each other with a variety of connectors.

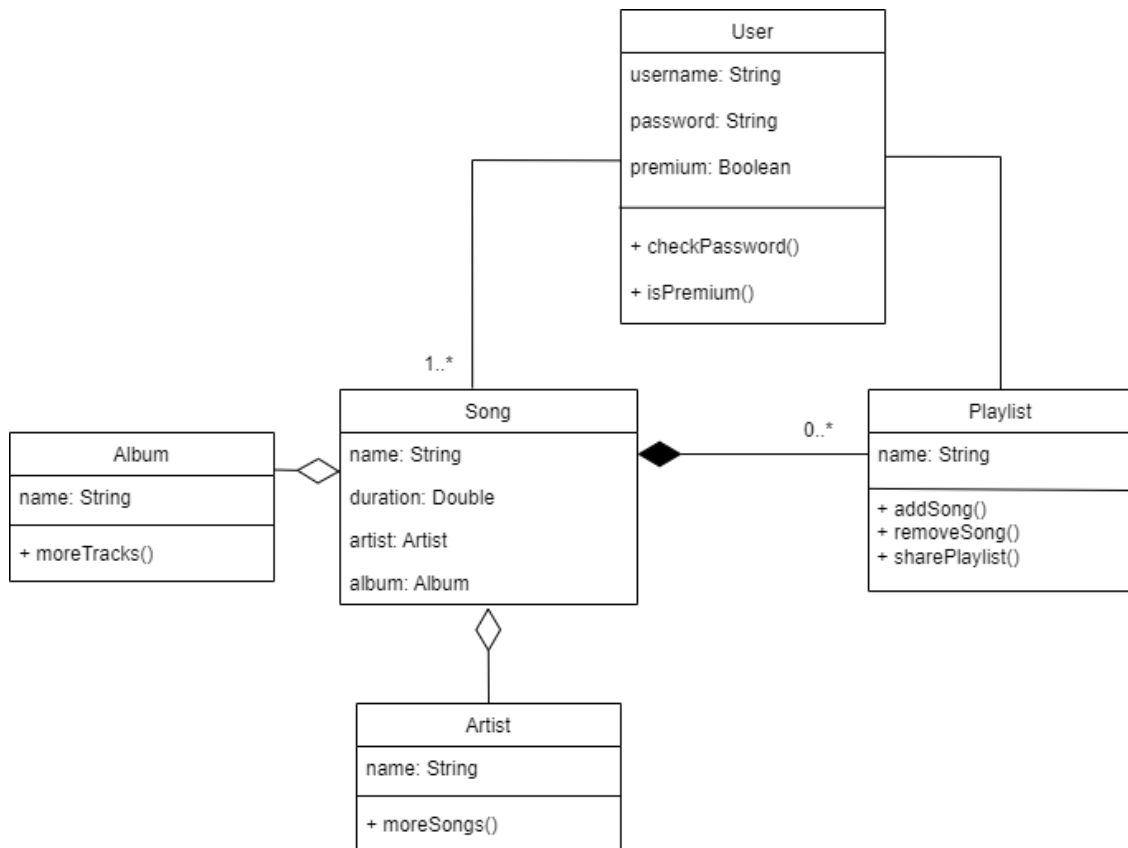


## 4. Sequence

## K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

Sequence diagrams are used to visualize both interactions within programs, business processes and IT infrastructures. They describe the sequence of interactions (messages) between actors and objects (things like databases or external interfaces).

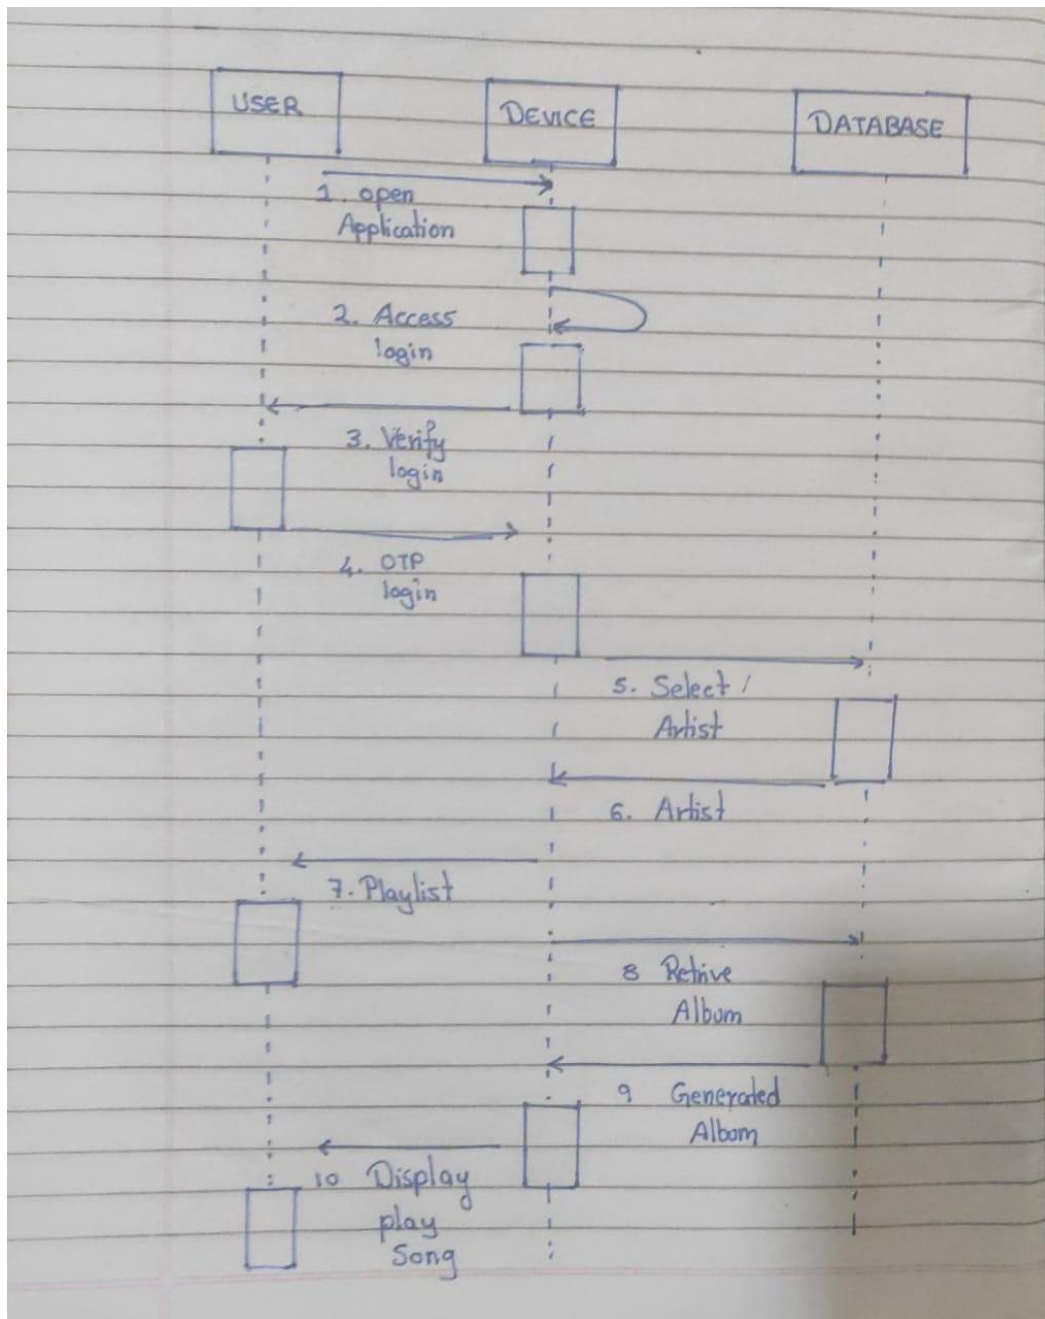

**Conclusion:**

## **K. J. Somaiya College of Engineering, Mumbai-77**

(A Constituent college of Somaiya Vidyavihar University)

From this experiment, we learnt about various types of UML diagram for requirement analysis and analyse the software requirements and those UML diagrams were successfully implemented.

### **Post Lab Descriptive Questions:**

1. Where do use cases fit in the software development life cycle?

The use cases of a system are commonly represented through a use case model. A use case model consists of the following components:

- Actors - the users who interact with the system.
- Use Cases - a written description of the requirements from the actor's point of view.
- Relationships between actors and use cases.

Use cases have been used with success in many types of software development and even in software development efforts where very little sequence of software is being developed, such as a commercial software package development. Use cases have the most value for systems that have many interfaces or systems that are determined or many type of actors. The use case model is made from requirements discipline. Requirement work matures the use cases through the first three states.

2. Compare sequence diagram with collaboration diagram. Explain pros and cons of each.

Sequence Diagram	Collaboration diagram
------------------	-----------------------



## K. J. Somaiya College of Engineering, Mumbai-77

(A Constituent college of Somaiya Vidyavihar University)

The sequence diagram represents the UML, which is used to visualize the sequence of calls in a system that is used to perform a specific functionality.	The collaboration diagram also comes under the UML representation which is used to visualize the organization of the objects and their interaction.
The sequence diagrams are used to represent the sequence of messages that are flowing from one object to another.	The collaboration diagrams are used to represent the structural organization of the system and the messages that are sent and received.
The sequence diagram is used when the time sequence is the main focus.	The collaboration diagram is used when object organization is the main focus.
The sequence diagrams are better suited for analysis activities.	The collaboration diagrams are better suited for depicting simpler interactions of the smaller number of objects.

### Sequence Diagrams:

It represents the UML which is used to visualize the sequence of calls in a system that is used to perform a specific functionality. The sequence diagram maps the sequence of messages that are flowing from one object to another. The sequence diagram is used where the time sequence is the main focus. The sequence diagrams are better suited to analyse activities.

### Collaboration Diagram:

It aims at showing the communication that takes place between objects by defining messages that flow between each other. They basically consist of superimposing the communication actions upon an object diagram. The interactions between objects & classes are shown in the form of links and the messages that flow through links.

### 3. List different notations used in Class diagram with example

**K. J. Somaiya College of Engineering, Mumbai-77**  
(A Constituent college of Somaiya Vidyavihar University)

