

---

# Unsupervised Wavetable Seam Artifact Repair via Hybrid GA–PPO Meta-Search

---

A PREPRINT

Julian M. Kleber 

Independent Researcher

Email: [julian.m.kleber@gmail.com](mailto:julian.m.kleber@gmail.com)

26 July 2026

Code (ReelSynth engine + DenoiseOpt meta-search): <https://github.com/reeldemo/reelsynth>,  
<https://github.com/reeldemo/denoise-opt-meta>

## ABSTRACT

Looping a wavetable with mismatched endpoints leaves a wrap-join click at the seam on every period. We study unsupervised repair of that local discontinuity without paired clean recordings. Scoring combines seam fidelity to a no-cliff ideal sibling with mid-cycle identity to the cracked engine. Classical raised-cosine fades, virtual-analog seam operators, and corrupt-to-corrupt Noise2Noise are strong baselines on some boards. Transfer benches apply the same wrap protocol to vibration, ECG, and synthetic cycles. Because no single operator fits every engine family, **DenoiseOpt** searches compact repair policies (classical fades plus tiny residual operators) with a hybrid genetic-algorithm and PPO meta-loop, ranking candidates by  $R_{\text{blend}}$ . A 1,200-iteration hybrid champion reaches about 0.9697 on holdout  $R_{\text{blend}}$ , below frozen Noise2Noise (about 0.9750) and well above Dual Cosine (about 0.541). On twenty multi-family boards, Ours edges Noise2Noise on mean score. Both beat Dual Cosine. On hard wrap cliffs, classical fades collapse while searched operators hold. The contribution is searchable repair operators that remain competitive when classical fades fail and require no paired clean targets at search time.

**Keywords** wavetable synthesis; wrap discontinuity; seam restoration; unsupervised learning; Noise2Noise; neural architecture search; reinforcement learning; genetic algorithms

## 1 Introduction

Wavetable oscillators store one period and wrap the read pointer at the end of the table. When those endpoints disagree, each wrap injects a discontinuity that listeners hear as a period-locked click.

**Wavetable synthesis in brief.** A wavetable synthesizer stores a single cycle of a waveform (the wavetable) and produces continuous tone by looping a read pointer through that table. Pitch is set by how fast the pointer advances; timbre comes from the stored shape (and, in multi-table banks, from morphing across tables). Tiling the stored period yields a sustained note under playback. If the endpoints disagree ( $x[0] \neq x[L-1]$ ), every wrap is a discontinuity at the wrap join (the seam), heard as a click locked to the fundamental. Figure 1 shows one stored period, tiled playback with wrap marks, and a zoomed mismatched wrap. The same geometry appears whenever a short loop is tiled for listening or scoring.

### Terminology.

- **Seam** (wrap join / loop join): the join between the end and start of one looped period, where a click appears if the endpoints mismatch. The seam is local. The signal is the whole waveform.

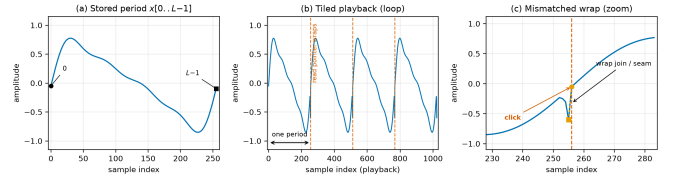


Figure 1: Wavetable synthesis primer. (a) One stored period  $x[0..L-1]$  ( $L=256$ ). (b) The same period tiled for continuous playback; dashed lines mark read-pointer wraps. (c) Zoom at a mismatched wrap join (seam), where the endpoint cliff produces an audible click.

- **Repair operator** (bake operator  $\Theta$ ; short: operator): the searchable local edit applied at the seam (formerly called a “cell” in code notes).
- **Residual operator**: optional tiny learned network inside a repair operator.
- $R$  /  $R_{\text{blend}}$ : unsupervised seam-quality scores (whole-curve prolonged  $R$  for debug;  $R_{\text{blend}}$  for primary selection). Details in Section 3.3.

- **Outer loop / meta-search:** GA-PPO search over repair-operator graphs (not end-to-end training of one large network).
- **Holdout:** frozen eval set / seed used for reported scores.

We treat the task as *cycle-local seam restoration*: edit a neighborhood of the wrap join (the seam), and optionally a small residual operator over the period, so multi-period playback matches an ideal reference that never opens the wrap cliff. Agreement uses a discontinuity-weighted blend  $R_{\text{blend}}$  (seam fidelity vs the ideal, plus mid-cycle identity vs the cracked engine) under a latency-aware objective  $J$  (Section 3.3).

**Four roles.** Keep these distinct (Figure 2; Section 3.4):

1. **Ideal sibling  $r^*$ :** cliff withheld. Scoring target only. Not a method.
2. **No-bake:** unrepaired cracked engine  $x$ , scored vs  $r^*$ . A do-nothing reference.
3. **Dual Cosine:** classical raised-cosine end fade. Classical baseline.
4. **Ours (DenoiseOpt):** searched repair operator from the hybrid outer loop.

Corrupt-to-corrupt **Noise2Noise** is a fifth comparator: the primary neural gate under the locked  $R_{\text{blend}}$  protocol (Section 5.2). It is not shown in Figure 2, which illustrates roles on one hard sine-wrap tile.

Classical virtual-analog tools already address wrap energy locally (BLIT/BLEP [1], PolyBLEP [3], BLAMP [2]). We score cycle-local bake versions of those operators beside Dual Cosine (Section 5.12). Label-free restoration such as Noise2Noise shows that useful reconstructors can be ranked without paired clean targets when the evaluation geometry is explicit [4, 5]. On the search side, NAS, aging evolution, PBT, CMA-ES, and evolution-guided policy gradients motivate a hybrid outer loop: GA for diversity, PPO for discrete architecture edits, and PBT-style exploit-mutate on elites [16, 19, 21–23].

**Key findings.** Under the locked v10.1  $R_{\text{blend}}$  protocol:

- The hybrid champion does *not* clear the frozen Noise2Noise holdout gate ( $R_{\text{blend}} \approx 0.9697$  vs 0.9750). Dual Cosine on that holdout sits near 0.541.
- On twenty multi-family boards, Ours edges Noise2Noise on mean score (0.931 vs 0.925; 13/20 wins). Both beat Dual Cosine.
- On hard wrap cliffs, classical fades collapse while searched operators and Noise2Noise hold (Section 5.8).
- On Factory+FX and AKWF corpora under  $R_{\text{blend}}$ , Noise2Noise leads Ours; both still beat Dual Cosine.

In summary, compact searchable repair operators remain competitive when classical fades fail and need no paired clean targets at search time. Older whole-curve scores near  $R \approx 0.991$  are historical context only. They must not dominate the mental model of the locked protocol.

**Transfer datasets.** As a cross-domain stress test (not a diagnosis claim), we reuse the same wrap protocol on seven boards (Section 4.2): **CWRU**, **MFPT**, and **Paderborn K001** bearing vibration (one shaft revolution as a period); **MIT-BIH** and a **PTB-XL** 500 Hz ECG subset (one heartbeat as a period); plus **synthetic CNC** and **synthetic PMU/AC** pilots when real downloads are walled. Domain-trained Noise2Noise quality is scored on those boards (Table 13); deep diagnosis baselines remain out of scope.

**Scope.** Cycle-local wavetable seam repair for DSP / synthesis venues. Caveats and exclusions live in Section 9.

## 1.1 Contributions

1. **Problem framing.** Wrap discontinuity as cycle-local seam restoration under tiled evaluation, with  $R_{\text{seam}}$ ,  $R_{\text{body}}$ , and primary  $R_{\text{blend}}$ .
2. **Hybrid DenoiseOpt loop.** RL+GA(+PBT) search over bake graphs and continuous parameters, scored by  $R_{\text{blend}}$  and ranked by  $J$ .
3. **Open evaluation path.** Frozen Noise2Noise gate, multi-family and wavetable-native boards, and named transfer benches with released code and artifacts.

## 2 Related Work

We group prior work by mechanism. **Used** citations are anchors for residual-scored RL+GA meta-search. **Screened** citations were checked as contrast and are not dependencies.

**Discontinuity control and modular DSP.** BLIT/BLEP [1], PolyBLEP [3], and BLAMP [2] state the wrap and corner problem for trivial oscillators. We score cycle-local approximations beside Dual Cosine (Section 5.12). DDSF frames DSP modules as composable blocks [6]. We reuse that framing for small bake/FIR/MLP seam operators at cycle scale, rather than end-to-end vocoders.

**Label-free restoration.** Noise2Noise learns restorers from corrupted observations alone [4, 5]. Mixture-invariant training ranks unsupervised systems without stem labels [29]. We train a corrupt-to-corrupt seam CNN on the same generator as the primary neural baseline (Section 5). Full Demucs / DiffWave stacks are screened: domain and bake-budget mismatch [34, 37].

**Compact waveform operators.** Wave-U-Net, Conv-TasNet, dual-path, and attention audio models supply block priors we shrink to bake width [8, 11–15, 30]. They supply block priors rather than serving as frozen full-scale separators inside every meta trial.

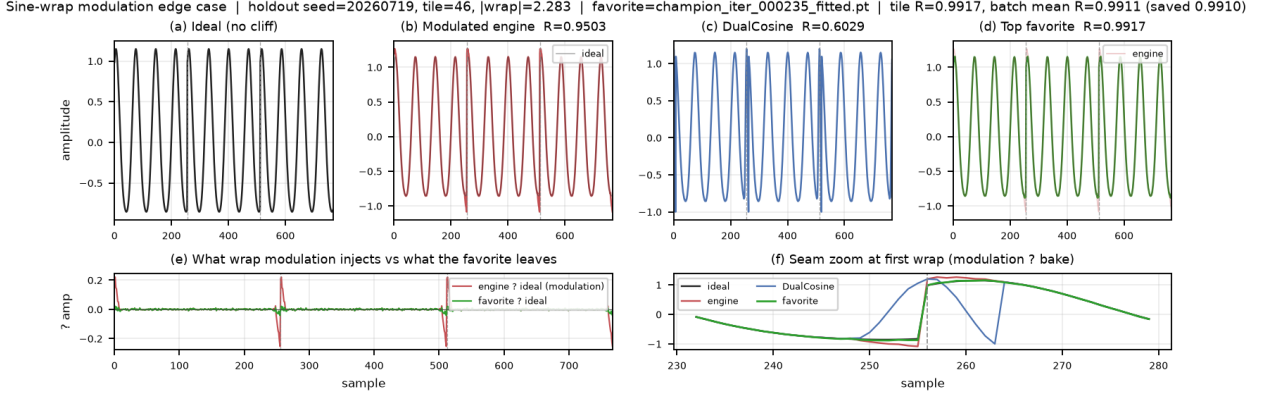


Figure 2: Hard sine-wrap holdout tile (seed 20260719). (a) Ideal sibling  $r^*$ . (b) No-bake cracked engine. (c) Dual Cosine fade. (d) Ours (searched bake). (e)–(f) Residual and seam zoom. Printed scores use whole-curve prolonged  $R$  for this figure; primary selection uses  $R_{\text{blend}}$  (Table 4).

**Search and hybrids.** NAS taxonomies, RL controllers, progressive and latency-aware NAS, aging evolution, PBT, CMA-ES, and evolution-guided policy gradients motivate the hybrid outer loop [16–19, 21–24, 27, 28]. MoE soft gates motivate routing among small heterogeneous operators under one residual score [25]. Matched outer-loop bake-offs (Random, CMA-ES, REINFORCE, aging evolution, TPE vs hybrid) sit in Appendix B.

**Used vs screened (short).** Used: VA discontinuity [1–3]; unsupervised restoration [4, 5, 29]; DDSP [6]; compact waveform operators as above; NAS/RL/PPO/PBT/CMA-ES/ERL/MoE as above. Screened as contrast only: MAML [32], DARTS [33], Demucs-scale enhancers [34, 36], DiffWave [37], SEGAN-style full GAN loops [38]. Claims stay inside cycle-local seam restoration under a declared compute budget.

### 3 Methods

#### 3.1 Notation

Throughout,  $x \in \mathbb{R}^L$  is the cracked single-period wavetable (engine input with open-wrap cliff). Let  $\mathcal{H}$  be the space of repair-operator configurations (discrete operator graph plus continuous bake parameters). The repair operator (bake operator  $\Theta$ ) is

$$\Theta : \mathbb{R}^L \times \mathcal{H} \rightarrow \mathbb{R}^L, \quad y = \Theta(x; h), \quad h \in \mathcal{H}. \quad (1)$$

When continuous parameters alone are emphasized we write  $\theta$  for the continuous slice of  $h$  and  $y = \Theta(x; \theta)$ .  $r^* \in \mathbb{R}^L$  is the procedural ideal sibling defined below. Tiling length  $N$  (typically  $N=16$ ) forms  $y_{\text{tiled}} = \text{Tile}(y, N)$  and  $r^*_{\text{tiled}} = \text{Tile}(r^*, N)$ . Seam width  $W$  (code: SEAM\_W, typically 8) is the neighborhood edited by classical fade and polish ops.  $R \in [0, 1]$  is the prolonged residual score (1 = best). These symbols follow a different convention from Noise2Noise clean/noisy pairs.

Table 1: Core symbols used in Methods.

| Symbol              | Meaning                                                                                    |
|---------------------|--------------------------------------------------------------------------------------------|
| $L$                 | Cycle length (samples per period)                                                          |
| $x$                 | Cracked engine wavetable period (cliff on)                                                 |
| $y = \Theta(x; h)$  | Baked cycle after seam ops / residual operator                                             |
| $\Theta$            | Repair operator (bake operator) $\mathbb{R}^L \times \mathcal{H} \rightarrow \mathbb{R}^L$ |
| $h \in \mathcal{H}$ | Repair-operator configuration (ops + continuous $\theta$ )                                 |
| $r^*$               | Ideal sibling (same seed; cliff withheld)                                                  |
| $G$                 | Procedural period generator (cliff on/off)                                                 |
| $N$                 | Prolong tiling count                                                                       |
| $W$                 | Seam neighborhood width                                                                    |
| $R$                 | Prolonged residual score in $[0, 1]$ (1 = best)                                            |

#### 3.2 Problem setup: cracked period and ideal sibling

**Problem.** Given a cracked period  $x$ , choose a bake configuration  $h$  so that the repaired cycle  $y = \Theta(x; h)$  matches a no-cliff ideal under prolonged tiling.

**Ideal sibling.** Let  $G(\text{seed}, \text{cliff})$  denote the procedural generator used by the CUDA FitCell batch maker (`make_batch` in the CUDA search runner): one draw of frequency, phase, and mid-cycle content, with an optional open-wrap cliff of width  $W$  at both ends. For any seed,

$$r^* = G(\text{seed}, \text{cliff}=\text{off}), \quad x = G(\text{seed}, \text{cliff}=\text{on}). \quad (2)$$

Engine and ideal therefore share the mid-cycle content of one draw and differ by the seam cliff (plus any seam-boosted noise applied only on the engine path). The ideal is *not* a latent studio ground truth and is *not* a method output. For an arbitrary cracked period from this family, the sibling is obtained by replaying the same seed with the cliff withheld. That is exactly the pair returned by `make_batch`. This sibling relationship makes unsupervised ranking possible without paired studio recordings [4, 5].

#### 3.3 Blended residual score and latency-aware objective

**Primary metric.** After tiling length  $N$ , define unit residual scores on index masks.  $R_{\text{seam}}$  compares  $y$  to  $r^*$  on wrap neigh-

borhoods of width  $W$  at each period head/tail.  $R_{\text{body}}$  compares  $y$  to the cracked engine  $x$  on the complementary mid-cycle body (identity prior: do not morph content away from the engine). The primary score is

$$R_{\text{blend}} = \alpha R_{\text{seam}}(r^*, y) + (1 - \alpha) R_{\text{body}}(x, y), \quad (3)$$

$$\alpha = 0.7.$$

with each component in the same clamp form  $\text{clamp}(1 - \text{rms}/\text{rms}_{\text{ref}}, 0, 1)$ . Whole-curve prolonged  $R$  remains a debug key only.

**Search objective.** Candidates maximize latency-aware

$$J = R_{\text{blend}} - \lambda \cdot \text{latency\_norm}, \quad (4)$$

$$\text{latency\_norm} = \frac{\log(1 + t_{\text{ms}})}{\log(1 + 50)}, \quad \lambda = 0.02.$$

FitCell minimizes  $1 - R_{\text{blend}}$ ; selection and champion updates use  $J$ . A champion must also strictly beat the frozen corrupt $\rightarrow$ corrupt Noise2Noise holdout  $R_{\text{blend}}$  (primary baseline).

**Every** scored row applies some  $\Theta$  to  $x$  and is evaluated under (3). The ideal sibling is the seam scoring target; body identity uses the engine. We do not claim convergence guarantees for the hybrid outer loop, nor a general wrap-closure theorem for arbitrary repair operators.

*Remark 1* (Noise2Noise primary baseline). *SeamN2N* ( $\approx 53.5\text{k}$ ) is the primary neural comparator and champ gate. Search may discover *n2n\_unet* operators at the same scale; *TinyUNet1D unet* is a different, smaller block [4, 5].

### 3.4 Seam bake operator and classical baselines

A **repair operator**  $\Theta(\cdot; h)$  composes classical seam ops (DualCosine, polish, soft seam, FIR blends) with optional tiny residual operators (MLP/FIR/U-Net-lite/attention-lite/LSTM-lite) and optional MoE soft gates over experts (Appendix A, Algorithms 2–4). Bake parameters live in a bounded box; architecture strings are discrete graphs over those ops. Separate classical controls apply cycle-local BLIT/BLEP, PolyBLEP, and BLAMP residual corrections at the wrap on the cracked engine tile (same interface as DualCosine / FIR; not a full oscillator rewrite). Plain-language roles: BLIT/BLEP and PolyBLEP correct a *value* step at wrap; BLAMP corrects a *slope*/corner jump; DualCosine fades endpoints without a BLEP residual. They are scored in Section 5.12.

#### Four roles (keep separate).

- **Ideal sibling**  $r^*$ : cliff withheld; scoring target only (panel (a) in Figure 2).
- **No-bake** (passthrough):  $\Theta_{\text{no-bake}}(x) = x$ ; unrepaired cracked engine scored vs  $r^*$  (panel (b)). Scores the cracked engine unchanged. Distinct from  $r^*$ , residual-net skips, and learned identity maps.
- **DualCosine**: classical raised-cosine end fade on  $x$  (panel (c)); one classical board row and, separately, a PPO advantage baseline (Remark 2).

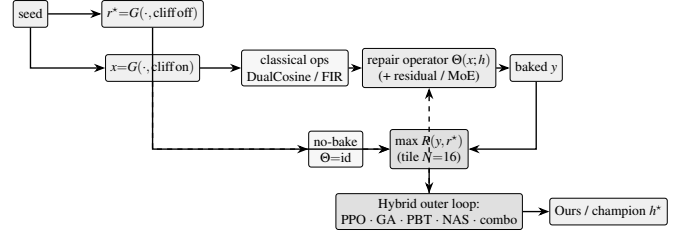


Figure 3: DenoiseOpt overview (before component deep-dives). Same-seed generator  $G$  yields ideal sibling  $r^*$  (cliff off) and cracked engine  $x$  (cliff on). Repair operator  $\Theta(x; h)$  may include DualCosine/FIR and optional residual/MoE experts. No-bake is the identity control  $x \mapsto x$ . Outer objective is maximize absolute prolonged  $R(y, r^*)$ . DualCosine centering (not shown) is PPO advantage shaping only. Dashed feedback: architecture proposals update the operator. Pseudocode in Appendix A.

- **Ours**: searched bake  $y = \Theta(x; h^*)$  from the hybrid outer loop (panel (d)).

On mild cliffs residual mass  $\ll$  ideal RMS under the unit clamp form of (3), so no-bake  $R_{\text{blend}}$  can sit high while the wrap click remains audible. It is a do-nothing passthrough reference, not a perceptual wrap-quality score. Released JSON may still use the legacy key *identity* for no-bake; manuscript prose uses *no-bake*.

**Classical (non-AI) comparison board.** Learned / searched methods are always ranked against the full classical board on absolute  $R$  (same  $r^*$ ): no-bake, DualCosine / cosine fade, *seam\_fir3*, classic quadratic, hann/crossfade/soft fades, detrend/ensemble, poly seam, and cycle-local BLIT/BLEP / PolyBLEP / BLAMP where scored. When tables show  $\Delta R$  vs DualCosine, that is a reporting gap vs one classical bake, not the definition of reward.

*Remark 2* (DualCosine centering is PPO advantage only). The outer objective remains (4): maximize absolute  $R(y, r^*)$ . In the PPO branch only, we optionally form a centered advantage

$$\rho = R - R_{\text{DualCosine}}, \quad (5)$$

so early-search advantages are roughly zero-mean. This does *not* change selection, FitCell loss, champion ranking, or the matched 5k meta-approach objective. All of those still maximize absolute  $R$ . DualCosine centering is soft relative shaping for the actor–critic, not a hard absolute ranking target.

### 3.5 Search pipeline

Figure 3 summarizes the residual-scored hybrid loop. Each outer iteration proposes a bake configuration  $h$ , runs FitCell (Appendix A, Algorithm 5) to fit continuous parameters under loss  $1 - R$ , evaluates prolonged  $R$  vs  $r^*$ , and updates the population / PPO policy. Pseudocode for GA, PPO, PBT, and the full hybrid rotation is in Algorithms 6–9.



### 3.6 Search space and inner fit

Each genome encodes: ordered op list (fade, polish, FIR, pin, residual write), depth, residual operator type (none, MLP, FIR, U-Net-lite, attn-lite, LSTM-lite), optional MoE expert count  $K \in \{2, 3, 4\}$ , and continuous  $\theta$  in the CUDA runner box bounds. The searchable bake vocabulary includes a width-capped 1–2 layer LSTM block over the seam window or full cycle (distinct from the fixed supervised seq-LSTM SOTA baseline). The live hybrid tag is PPO+GA+PBT+NAS+depth+MoE with LSTM enabled in the block graph.

FitCell draws sibling batches via  $G$ , applies  $\Theta(\cdot; h)$ , and steps Adam on  $1 - R$  with early stopping on plateau (Algorithm 5).

### 3.7 Hybrid outer loop

Each iteration rotates among branches: PPO, GA, PBT, NAS, and combo. Selection and FitCell are always by absolute residual  $R$  (maximize toward the ideal sibling; loss  $1 - R$ ).

**Near-ceiling scores need reward shaping.** On the sine+cliff generator, no-bake already sits near  $R \approx 0.97$ , and strong classical / searched bakes live in a narrow band toward 1 (often 0.99–0.991). Absolute gaps of order  $10^{-3}$ – $10^{-2}$  are real but tiny as raw PPO/GA signals. Without shaping, advantages collapse. Hyperparameters (clip, entropy, mutation rate, population size, fit steps, learning rate) then decide whether the outer loop can climb the last percent. We therefore treat reward shaping and search hyperparameters as first-class tunables alongside bake architecture. In the present hybrid, PPO uses a searchable shaping mode among  $\{\text{abs\_r}, \text{vs\_dualcosine}, \text{vs\_nobake}, \text{neglog\_gap}\}$  (PBT-mutated; default  $\rho = R - R_{\text{DualCosine}}$  per Remark 2). PBT mutates fit / PPO hyperparameters and reward mode in-population; plateau adaptation retunes branch mix and depth/MoE bias when champions stall. The matched 5k meta-approach comparison (Section 3.8) is the sole GPU experimentation vehicle for outer-loop family, HP, and reward-shaping sweeps under a shared FitCell budget.

### 3.8 Meta-learning approach comparison

Beyond the hybrid outer loop, we compare five additional outer-loop families under a matched 5,000-evaluation budget, shared search seed 1902771841, and the same FitCell / prolonged- $R$  protocol (LSTM and xLSTM included in the searchable bake vocabulary). Table and figure legends use the short display names below (artifact folders keep stable code keys; see the [nomenclature](#)):

- **Random NAS** (`random`): independent uniform draws over bake graphs and fit hyperparameters (control).
- **Cont. CMA-ES** (`cmaes`): diagonal covariance-matrix adaptation over a continuous encoding of depth, width, operator kind, block logits, and fit hyperparameters [24].

- **Arch REINFORCE** (`reinforce`): vanilla policy gradient over discrete architecture-edit actions (no clipped surrogate; contrast to PPO [17, 19]).
- **Aging evolution** (`aging_evo`): regularized evolution with oldest-member replacement after tournament parent selection [20, 21], distinct from the hybrid’s non-aging tournament GA branch.
- **TPE Bayes NAS** (`tpe`): lightweight tree-structured Parzen estimator over discrete bake categoricals in the spirit of practical Bayesian optimization [26].

We also run **Ours (hybrid GA-PPO)** (`hybrid_lstm`): the multi-branch hybrid loop for 5,000 evaluations with LSTM/xLSTM in the block vocabulary and online reward-mode / fit-PPO hyperparameter co-tuning, as the proposed matched-budget arm. Results appear in Appendix B (Table 15, Figures 20–21); healed-sample overlays in Figure 7.

*Remark 3* (Trial complexity). Per outer iteration the dominant cost is  $O(T_{\text{fit}} \cdot C_{\text{fwd}})$  for fit steps times one forward bake. Bake-width caps (tiny residual operators) keep  $C_{\text{fwd}}$  far below full-band Demucs/DiffWave forwards screened in Related Work.

### 3.9 Hyperparameters

Table 2 lists the CUDA search defaults used for the 5k-gate freeze reported in Results. Under the near-ceiling residual regime (Section 3.7), these outer-loop and fit hyperparameters are co-tuned with architecture; PBT and plateau adaptation continue to mutate several of them online. Companion listings: Algorithms 1–9 (Appendix A) and the [pseudocode notes](#).

## 4 Experiments

**Locked evaluation protocol.** Evaluation follows the [v10.1 evaluation protocol](#). Primary metric:  $R_{\text{blend}}$  ( $\alpha=0.7$ ). Search objective:  $J$  as in (4) ( $\lambda=0.02$ ). Champ gate: strictly beat frozen Noise2Noise corrupt→corrupt holdout  $R_{\text{blend}}$ . Secondary: SNR, SDR, wrap-jump, seam-local edge RMSE; debug keys include pure  $R_{\text{seam}}$  and whole-curve  $R$ . Holdout seed 20260719. Search seed 1902771841. N2N train seed 424242. We report the `hybrid_lstm` freeze plus holdout / multi-family / Factory+FX / AKWF / transfer benches. PESQ/STOI stay out of scope on non-speech cycles. LibriSpeech and MUSDB are not used. Venue: DSP / synthesis artifact repair (DAFx / AES / arXiv cs.SD).

### 4.1 Dataset

**Creation.** The paper-facing evaluation corpus is a frozen draw from the same synthetic generator used by the CUDA search runner (`make_batch`). Each cycle has length  $L=256$ . A two-harmonic sine is drawn with frequency  $\sim \mathcal{U}(1, 4)$  and phase  $\sim \mathcal{U}(0, 2\pi)$ . An open-wrap seam cliff of amplitude  $\pm \mathcal{U}(0.08, 0.43)$  is applied over  $\text{SEAM\_W}=8$  samples at both ends. Seam-boosted Gaussian noise (scale 0.02 at the ends,  $0.15\times$  in the mid-cycle) is added to form the engine input. The

Table 2: Hybrid search hyperparameters (RTX 3090 DenoiseOpt CUDA search-runner defaults). Co-tuned with reward shaping under near-ceiling  $R$  (Section 3.7).

| Parameter                               | Value                                              |
|-----------------------------------------|----------------------------------------------------|
| Population size $n$                     | 12                                                 |
| GA tournament $k$                       | 3                                                  |
| GA crossover fraction $p_c$             | 0.5 (else clone elite parent)                      |
| GA mutation                             | $\geq 1$ mutate after inherit (+50% second mutate) |
| PPO clip $\epsilon$                     | 0.2 (default; searchable {0.1, 0.2, 0.25, 0.3})    |
| Adam learning rate (fit)                | $3 \times 10^{-3}$ (default; PBT-searchable)       |
| Adam learning rate (policy)             | $3 \times 10^{-4}$                                 |
| Entropy coefficient (PPO)               | 0.02 (default; searchable $\approx 0.005$ –0.06)   |
| PBT exploit / mutate                    | elite fraction 0.25; multi-step arch+hp mutate     |
| MoE routing                             | sequential or moe_parallel when enabled            |
| Plateau boredom threshold               | 1000 iters without champ improve                   |
| Cycle length $L$ / tiles $N$ / seam $W$ | 256 / 16 / 8                                       |
| Fit steps / batch (default)             | 24 / 48                                            |
| Algo tag                                | PPO+GA+PBT+NAS+depth+MoE                           |

ideal withholds the cliff and is used only as the scoring target  $r^*$  (never as a method output). No-bake leaves the cracked engine unchanged and scores that unrepaired  $x$  against the same  $r^*$ . Prolonged residual  $R$  tiles each cycle  $N=16$  times before the RMS ratio. The holdout seed is 20260719 (distinct from the hybrid search seed 1902771841). The search campaign draws fresh i.i.d. batches from this generator and does not train on the frozen holdout tensors. There is no supervised clean/noisy training split of studio audio.

**Multi-family diversity ( $\geq 20$  waveforms).** Beyond the single sine+cliff holdout, Phase 3a scores methods on 20 generative draws: ten family variants (sine\_cliff, harmonic\_fft, am\_fm, nonlinear, combo, triple\_mix, extreme\_overlay, open\_wrap\_bias, soft\_noise, wide\_seam)  $\times$  two seeds (20260719 and 20260720), batch 64 each (128 cycles per family; 1,280 total). These Python generative variants stress harmonic / AM-FM / nonlinear / overlay / open-wrap behavior of make\_batch and remain the primary SOTA matrix. Separately, export\_sound\_bench\_tiles exports 20 Rust sound\_bench engine/ideal pairs (10 families  $\times$  2 seeds,  $L=256$ , byte-aligned with generate\_sound / generate\_sound\_ideal) scored under the same residual geometry as a secondary transfer block (Table 12). Every method sees the same tensors per waveform. **Primary classical comparison** is absolute prolonged  $R$  against the non-AI board (no-bake, DualCosine, seam\_fir3, poly, fades, VA residuals; Section 3.4). The search objective is

Table 3: Dataset statistics (evaluation boards).  $L=256$  unless noted. Hours are raw source duration on disk where measurable, not tiled period count. Plot 4 compares  $\approx 1,280$ -height boards only (multi-family / Factory+FX / AKWF / transfer).

| Board             | Size          | Notes                                    |
|-------------------|---------------|------------------------------------------|
| Holdout metrics   | 4,096 cycles  | seed 20260719; $N=16$ tiles              |
| Score batch       | 64 cycles     | classical / favorite tables              |
| Multi-family SOTA | 1,280 cycles  | 10 families $\times$ 2 seeds $\times$ 64 |
| Factory+FX export | 1,280 periods | 640 dry + 640 FX mid-tile extracts       |
| AKWF OA           | 1,280 periods | CC0 single-cycle WAVs                    |
| Meta hybrid_lstm  | 1,200 iters   | $R_{\text{blend}}+J$ ; seed 1902771841   |
| CWRU              | 256 periods   | 4 MAT files; DE @12 kHz                  |
| MFPT              | 256 periods   | shaft-rate windows                       |
| MIT-BIH           | 256 periods   | 10 records @360 Hz                       |
| PTB-XL subset     | 256 periods   | 94 *_hr @500 Hz                          |
| synth CNC / PMU   | 256+256       | procedural pilots                        |

maximize  $R$  toward the ideal sibling (best  $R=1$ ). DualCosine is one classical comparator and a PPO centering constant. It is not the reward target.

**Dataset statistics.** Table 3 and Figures 4–5 inventory every evaluation board used in this paper. The primary procedural holdout is a frozen 4,096-cycle metrics draw ( $L=256$ ,  $N=16$  tiles, seed 20260719) plus a matched score batch of 64 cycles (five consecutive seeds for classical mean $\pm$ std). Multi-family SOTA scores 20 waveforms (10 families  $\times$  2 seeds, batch 64; 1,280 cycles). Wavetable-native boards use Reel-Synth Factory+FX exports ( $n=1,280$ : 640 dry + 640 FX) and AKWF CC0 cycles ( $n=1,280$ ) so Plot 4 corpus bars are comparable to multi-family (1,280). Sci/eng transfer tiles 1,536 periods across CWRU, MFPT ( $n=256$ ), MIT-BIH, PTB-XL subset, and synthetic CNC/PMU. Search never trains on the frozen holdout; N2N/seq baselines use disjoint train seeds 424242/424243. Artifacts: [dataset artifacts](#).

**Dataset metrics.** A metrics draw of 4,096 cycles under the holdout seed yields mean ideal RMS  $0.721 \pm 0.016$ , mean engine residual RMS  $0.021 \pm 0.013$ , and mean absolute wrap jump  $|x_0 - x_{L-1}|$  of  $0.913 \pm 0.634$ . No-bake (passthrough) on that draw scores mean  $R \approx 0.971$ . Method tables use a matched score batch of 64 cycles from the same seed (the [canonical evaluation tensors](#)), five consecutive seeds for mean $\pm$ std on the classical table, and the 20-waveform matrix for SOTA secondary metrics. Figure 6 summarizes the 4,096-cycle metrics draw: ideal RMS clusters near 0.72, wrap jumps span nearly three orders of magnitude (median  $\approx 0.83$ ), and no-bake  $R$  is high on easy tiles but falls below 0.91 on the hardest decile of wrap jumps. Figure 2 is the documented sine-wrap edge case: a high- $|wrap|$  holdout tile where cliff mod-

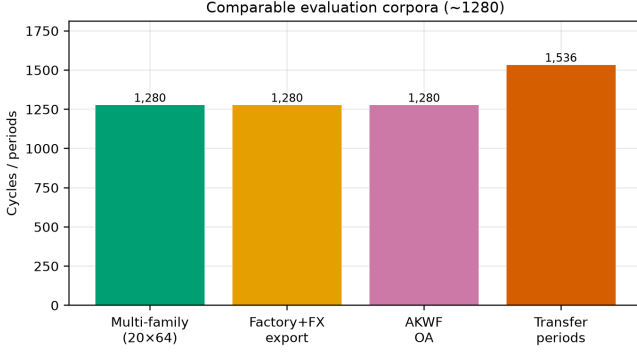


Figure 4: Corpus sizes across evaluation boards (cycles or periods). Holdout metrics draw, matched score batch, multi-family SOTA, factory/AKWF wavetable-native sets, and summed transfer periods.

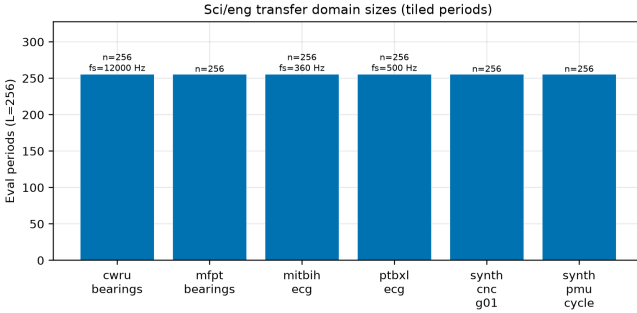


Figure 5: Sci/eng transfer domain sizes: tiled eval periods at  $L=256$  (with source  $f_s$  where applicable).

ulation is visible, scored with DualCosine and the top neural favorite under the same residual  $R$  (tile  $R \approx 0.9917$ , favorite batch mean  $R \approx 0.991$ ).

**Hybrid search campaign (5,000-iteration freeze).** A CUDA search tagged PPO+GA+PBT+NAS+depth+MoE runs with a large declared iteration budget (order  $10^5$ ). At the reported freeze (run `gpu-rl-arch-20260719T083019Z`,  $\approx 6,922$  clean iters /  $\approx 7.9$ h on RTX 3090) the champion residual is  $R \approx 0.99093$  against DualCosine baseline  $\approx 0.81658$  ( $\Delta R \approx +0.174$ ). Branch-best residuals at the freeze: GA  $\approx 0.99016$ , PBT  $\approx 0.99012$ , PPO  $\approx 0.98924$ , combo  $\approx 0.98854$ , NAS  $\approx 0.98677$ . Isolated short-budget re-runs (GA-only, PPO-only, GA+PPO, full, 150 iters, same search seed, plateau adapt off) are reported beside those freezes in Table 16. Figures in Section 5 regenerate from the archived [search results](#).

**Inference, classical, and learned baselines.** High- $R$  fitted operators ( $R \geq 0.98$ ) are timed on CUDA (batch 64, prolonged residual). Ten non-learnable bake denoisers share the frozen canonical holdout against the neural favorite (Table 6). Cycle-local BLIT/BLEP, PolyBLEP, and BLAMP seam repairs are scored on the same holdout / cliff / multi-family protocol (Table 11; [VA results](#)) and illustrated on the

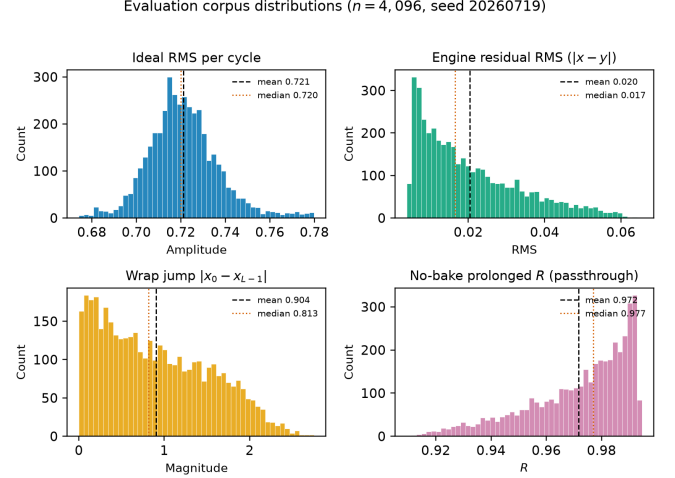


Figure 6: Holdout distribution statistics (seed 20260719,  $n=4,096$  cycles). Distinguish: ideal sibling  $r^*$  (cliff withheld); no-bake = unrepaired cracked engine (not  $r^*$ ); DualCosine = one classical bake. Top left: ideal RMS per cycle. Top right: engine residual RMS before any bake. Bottom left: wrap jump magnitude  $|x_0 - x_{L-1}|$  (cliff hardness proxy). Bottom right: no-bake prolonged  $R$  (passthrough,  $x \mapsto x$ ). Dashed and dotted vertical lines mark mean and median. Hard-cliff reporting (Section 5) uses the top 10% wrap-jump stratum where no-bake  $R$  drops.

intro high-wrap tile (Figure 11). Fixed-arch MLP-on- $R$  and CNN/U-Net-lite-on- $R$  baselines (no outer NAS) are trained on  $1-R$  with the same generator and scored in the SOTA matrix. Phase B adds a primary corrupt $\rightarrow$ corrupt Noise2Noise seam CNN (train seed 424242, disjoint from holdout), a secondary sibling-supervised ceiling on the same architecture, and lightweight LSTM / depthwise 1D-CNN seq restorers (train seed 424243). No search-champion weights initialize those baselines. Family-conditional hardness uses the separate Rust procedural 100,000-cycle bench reported in Results.

**Cliff strata and wavetable-native realism.** A 4,096-tile holdout draw (seed 20260719) is stratified by engine wrap-jump percentiles (top 25% / top 10%; cutoffs in the [cliff-strata data](#)). Hard-cliff is the operative regime for claims about DualCosine collapse vs favorite retention. Edge RMSE is the locked required seam-local secondary; click energy is optional. Wavetable-native transfer (Phase F1) scores true ReelSynth-exported factory periods (primary) and external AKWF CC0 WAVs (secondary) under the same close-seam $\rightarrow$ open-wrap protocol. Procedural stand-ins are tertiary smoke only. Speech/music LibriSpeech/MUSDB corpora remain off.

**Audible demos and vibrato spectrograms.** Downloadable clips (no-bake / DualCosine / Ours; 44.1 kHz mono, A4, 3s): [hear-sample WAVs](#). Rebuild script: [export\\_meta\\_hear\\_samples.py](#). Slow-vibrato spectrogram protocol ([bench\\_vibrato\\_spectrogram.py](#);

artifacts: [vibrato folder](#)) scores the same bake operators under modulated-pitch playback; figures in Section 5.15. These assets support informal audition only. Formal MOS/MUSHRA scores were not collected; the planned listening protocol is in Section 5.19.

## 4.2 Cross-domain wrap transfer protocol

The primary claim of this paper is wavetable seam repair. As a stress test, we ask whether the *same* cycle-local wrap geometry and DenoiseOpt search still help on short periodic signals from other fields (not as domain diagnosis SOTA, but as “does a wrap cliff + ideal sibling still make sense?”

**Shared transfer recipe.** For each domain we cut fixed-length periods ( $L=256$ ), build an ideal sibling (smooth / template / cubic path) and a cracked engine (same content with an open-wrap cliff, sometimes with a deliberately worse interpolant), then run the same prolonged residual  $R$  FitCell objective and `hybrid_lstm` outer loop used in the historical wavetable search freezes (150–250 outer iterations per dataset, `fit_steps` = 40). (This transfer pilot predates the v10.1  $R_{\text{blend}}+J$  lock; do not read Table 13 as  $R_{\text{blend}}$ .) Classical baselines (no-bake, DualCosine, FIR, endpoint pin, ...) share that board. Domain-trained Noise2Noise (corrupt→corrupt, 4000 Adam steps) is scored on the same seven boards and reported beside classical rows in Table 13. Artifacts: [sig-nal\\_heal\\_transfer](#).

**What each dataset is.**

**CWRU bearings.** Public vibration recordings from the Case Western Reserve University Bearing Data Center (drive-end accelerometer, typically 12 kHz). One shaft revolution is treated as one “period”: the ideal uses cubic resampling of the revolution; the engine uses a coarser linear path plus a wrap cliff (bad change-of-time proxy). Real data;  $n=256$  periods.

**MFPT bearings.** Fault-bearing vibration from the Society for Machinery Failure Prevention Technology Fault Data Sets (fixed 25 Hz shaft rate in our windows). Same cubic-ideal / linear+cliff-engine construction as CWRU. Real data;  $n=256$  periods.

**Paderborn KAt (K001).** Paderborn Bearing Data Center healthy bearing K001 vibration (Lessmeier et al., PHME 2016; CC BY-NC 4.0). Equal-angle shaft revolutions when speed is available; cubic ideal vs linear+cliff engine (same classical board construction as CWRU/MFPT). Real data;  $n=256$  periods. Separately, AI Firdausi CNN\_1D\_2L is trained from scratch on K001/KA04/KI04/KB23 as a 4-class fault classifier; an optional arch-reuse wrap bake is labeled separately (Table 14).

**MIT-BIH ECG.** Classic PhysioNet arrhythmia ECG corpus. We take normal R–R beat windows as periods: the ideal

DenoiseOpt wrap heal | max absolute  $R$  toward ideal sibling (holdout Ours  $R=0.9914$ , DualCosine=0.8249; seeds 20260719/1902771841)

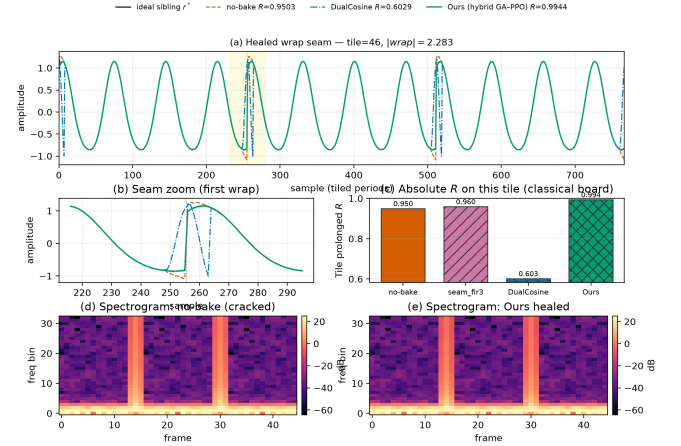


Figure 7: Holdout wrap-seam heal for the hybrid champion vs no-bake, Dual Cosine, and ideal sibling  $r^*$  (seed 20260719).

is a local mean beat template with mild endpoint equalization; the engine is the beat plus an artificial wrap cliff. Real data;  $n=256$  periods.

**PTB-XL ECG (subset).** Large PhysioNet clinical ECG collection. We use the 500 Hz records500 / \*\_hr lead-I beat windows only (a subset pilot) ( $n=256$  periods from 94 records), not the full PTB-XL corpus. Same beat-template ideal / cliffed engine idea as MIT-BIH.

**Synthetic CNC G01.** Stand-in for closed machine-tool contours (sharp corners vs a wide blend). Real KIT CNC downloads are login-walled, so this row is a procedural pilot with the same wrap protocol;  $n=256$ . Not a claim on industrial toolpaths.

**Synthetic PMU / AC cycle.** Stand-in for one power-system AC / PMU voltage cycle with a wrap cliff. Real IEEE DataPort PMU streams need an account, so this row is synthetic;  $n=256$ . Not a claim on live grid telemetry.

**Scope note.** Transfer tables compare classical rows, domain-trained Noise2Noise, and Ours under this residual protocol. Author ECG Cycle-GAN and BeatDiff have OOD wrap- $R$  probes; Paderborn AI Firdausi is a trained fault classifier (plus labeled arch-reuse wrap bake); formal listening remain out of scope (Section 9; Table 14). Results appear in Section 5.18.

## 5 Results

**Reading guide.** Primary numbers use locked  $R_{\text{blend}}$  (Sections 5.1–5.2). Hard-cliff classical collapse and multi-family ranking follow. Matched outer-loop bake-offs, HP probes, branch freezes, and transfer latency sit in Appendix B. Honesty notes are collected in Section 9.



Table 4: Ours vs Noise2Noise and Dual Cosine under  $R_{\text{blend}}$  ( $\alpha=0.7$ ).  $\Delta$  columns are Ours minus that baseline. Gate: Ours exceeds N2N.

| Board               | Ours   | N2N    | DualCosine | $\Delta_{\text{N2N}}$ | $\Delta_{\text{DC}}$ | Gate  |
|---------------------|--------|--------|------------|-----------------------|----------------------|-------|
| Holdout             | 0.9697 | 0.9750 | 0.5409     | -0.0053               | +0.4289              | no    |
| Multi-family (mean) | 0.9311 | 0.9249 | 0.5144     | +0.0062               | +0.4167              | 13/20 |
| Factory+FX          | 0.6990 | 0.7714 | 0.5887     | -0.0724               | +0.1104              | no    |
| AKWF OA             | 0.6794 | 0.7305 | 0.4244     | -0.0511               | +0.2551              | no    |

### 5.1 Hybrid search under the blended score

Does hybrid GA+PPO beat the frozen Noise2Noise gate under  $R_{\text{blend}}$  and  $J$ ? A 1,200-iteration search (seed 1902771841,  $\approx 1.65$  h wall) selects on  $J$  (4) ( $\lambda=0.02$ ). Champion:  $R_{\text{blend}} \approx 0.9695$ ,  $J \approx 0.9603$ ,  $t \approx 5.08$  ms. Search-monitor Dual Cosine on the same runner:  $R_{\text{blend}} \approx 0.504$ . Frozen Noise2Noise holdout gate:  $R_{\text{blend}} \approx 0.9750$ . The search champ does *not* clear that gate, while clearly clearing Dual Cosine. Artifacts: [hybrid search data](#).

### 5.2 Noise2Noise vs Ours on four boards

Table 4 summarizes the four evaluation boards under  $R_{\text{blend}}$ , with Dual Cosine as the classical fade row on every board. On the frozen sine+cliff holdout (seed 20260719), Noise2Noise leads Ours (0.9750 vs 0.9697;  $\Delta \approx -0.0053$ ), while Dual Cosine collapses to 0.5409 (Ours-DualCosine  $\Delta \approx +0.429$ ). On the 20-waveform multi-family board, Ours mean 0.9311 exceeds N2N 0.9249 (13/20 wins;  $\Delta$  mean  $\approx +0.0062$ ) and both dominate Dual Cosine (mean  $\approx 0.514$ ). On balanced wavetable-native corpora ( $n=1,280$  each), N2N leads Factory+FX (0.771 vs Ours 0.699; Dual Cosine 0.589) and AKWF (0.731 vs Ours 0.679; Dual Cosine 0.424). Latency: holdout Ours  $\approx 4.57$  ms vs N2N  $\approx 0.65$  ms ( $J$  still favors N2N on holdout).

**Earlier whole-curve scores (context only).** Earlier whole-curve prolonged- $R$  freezes ( $R \approx 0.991$  vs DualCosine  $\approx 0.825$ ) are historical context only; v10.1 selection uses  $R_{\text{blend}}+J$  and Noise2Noise as the primary neural baseline.

### 5.3 Which families stay hard

On the fitted DenoiseOpt 100,000-cycle bench, denoise score  $D$  is lowest for nonlinear ( $D \approx 0.39$ ) and combo ( $D \approx 0.40$ ), then triple\_mix / extreme\_overlay ( $D \approx 0.51$ – $0.52$ ), while harmonic\_fft and am\_fm sit near  $D \approx 0.69$ – $0.70$ . Lit-combo champion family stress (prolonged residual) similarly ranks open\_wrap\_bias ( $R \approx 0.83$ ) and extreme\_overlay / combo ( $R \approx 0.88$ – $0.89$ ) below harmonic\_fft ( $R \approx 0.95$ ). Hard sounds recur.

**Earlier whole-curve search freeze.** At the reported 5k-gate search freeze ( $\approx 6,922$  clean iterations,  $\approx 7.9$  h on RTX 3090) the champion residual was  $R \approx 0.99093$  with DualCosine  $\approx 0.81658$  on the CUDA search runner ( $\Delta R \approx +0.174$ ). That freeze used whole-curve prolonged  $R$  (superseded by  $R_{\text{blend}}$  for v10.1 selection). Monitoring plots below are regenerated from that freeze.

Table 5: Top-5 distinct fitted architectures on the CUDA inference bench (batch 64, prolonged  $R$ , seed geometry matching the search campaign). Favorite is latency-best inside the near-max- $R$  band ( $R \geq R_{\text{max}} - 5 \cdot 10^{-4}$ ).

| Tag          | $R_{\text{saved}}$ | $R_{\text{live}}$ | ms/batch | params  |
|--------------|--------------------|-------------------|----------|---------|
| iter_000157  | 0.9914             | 0.9913            | 7.18     | 104 484 |
| iter_000205  | 0.9911             | 0.9907            | 7.29     | 70 562  |
| iter_000235* | 0.9910             | 0.9915            | 3.15     | 37 489  |
| iter_000397  | 0.9910             | 0.9907            | 6.80     | 97 262  |
| iter_000229  | 0.9909             | 0.9902            | 6.67     | 100 500 |

\*Favorite (fastest in  $R \geq R_{\text{max}} - 5 \cdot 10^{-4}$  band).

### 5.4 Inference latency at matched score

Across diverse high- $R$  fitted operators ( $R \geq 0.98$ ), we timed CUDA forward passes (batch 64, prolonged residual). Within a tight band of the best residual ( $R \geq R_{\text{max}} - 5 \cdot 10^{-4}$ ), the **favorite** is the lowest-latency model: champion\_iter\_000235 with  $R \approx 0.9910$ ,  $\approx 3.15$  ms/batch,  $\approx 37$ k parameters (versus a higher-capacity max- $R$  operator at  $R \approx 0.9914$  but  $\approx 7.18$  ms/batch /  $\approx 104$ k params). Selection rule: maximize  $R$ , then minimize latency inside the band.

### 5.5 Top-5 architectures

Table 5 ranks five distinct fitted bake graphs from the CUDA inference bench ([inference data](#), batch 64), preferring residual  $R$  first and latency on ties, and skipping near-duplicate copies of the same topology signature.

### 5.6 Classical methods vs neural favorite

Table 6 scores the classical (non-AI) bake set (no-bake, DualCosine, and seam\_fir3) plus the neural favorite on the frozen corpus of Section 4.1 (CUDA, batch 64, seed 20260719). Every row uses the same ideal sibling  $r^*$ ; higher  $R$  means closer to that sibling. DualCosine reaches  $R \approx 0.825$  ( $\approx 1.35$  ms/batch), near the search-monitor DualCosine  $\approx 0.817$  on live draws from the same generator. The best *active* classical repair is seam-local 3-tap FIR (seam\_fir3) at  $R \approx 0.961$  /  $\approx 0.67$  ms/batch ( $0.962 \pm 0.002$  over five seeds). No-bake (passthrough; unrepaired engine vs  $r^*$ ) scores  $R \approx 0.972$ . It scores unrepaired passthrough, not the ideal sibling. The neural favorite reaches  $R \approx 0.991$  ( $0.991 \pm 0.0002$  over five seeds) at  $\approx 2.56$  ms/batch ( $\approx 37$ k params):  $\Delta R \approx +0.019$  vs no-bake,  $\Delta R \approx +0.030$  vs seam\_fir3, and  $\Delta R \approx +0.166$  vs DualCosine. This table is a classical-board snapshot under prolonged  $R$ ; Noise2Noise appears on the multi-family matrix (Table 7: favorite 0.977 vs N2N corrupt $\rightarrow$ corrupt 0.970 vs DualCosine 0.814) and on the  $R_{\text{blend}}$  four-board (Table 4).

### 5.7 Multi-family comparison

Does the meta favorite beat the classical non-AI board (no-bake, DualCosine, FIR, poly, fades), fixed MLP/CNN base-lines, *and* Noise2Noise across twenty generative families? Table 7 reports mean $\pm$ std over the 20-waveform multi-family

Table 6: Canonical holdout under historical prolonged  $R$  (seed 20260719). Mean $\pm$ std over five seeds vs the same  $r^*$ . No-bake = unrepaired engine.

| Method                  | $R$    | $R$ (5-seed)        | ms/batch |
|-------------------------|--------|---------------------|----------|
| neural favorite         | 0.9911 | $0.9912 \pm 0.0002$ | 2.56     |
| no-bake (passthrough)   | 0.9718 | $0.9726 \pm 0.0021$ | 0.31     |
| seam_fir3               | 0.9610 | $0.9616 \pm 0.0019$ | 0.67     |
| classic quadratic       | 0.8449 | $0.8453 \pm 0.0117$ | 1.59     |
| DualCosine              | 0.8249 | $0.8258 \pm 0.0137$ | 1.35     |
| cosine fade             | 0.8249 | $0.8258 \pm 0.0137$ | 1.59     |
| crossfade               | 0.8116 | $0.8130 \pm 0.0145$ | 1.50     |
| hann blend              | 0.8048 | $0.8060 \pm 0.0156$ | 0.54     |
| soft wide fade          | 0.7432 | $0.7378 \pm 0.0171$ | 2.64     |
| detrend                 | 0.4079 | $0.4091 \pm 0.0386$ | 0.36     |
| ensemble detrend+DC+FIR | 0.4024 | $0.4027 \pm 0.0387$ | 1.56     |

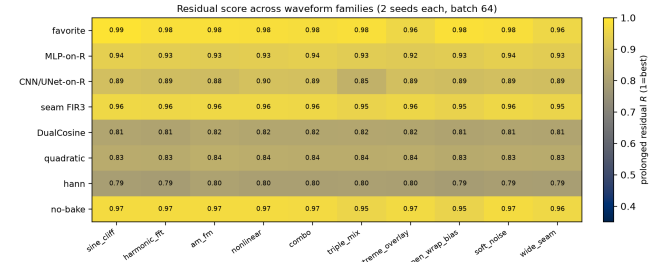


Figure 8: Colorblind-safe (cividis) heatmap of mean prolonged  $R$  for selected methods  $\times$  generative families (2 seeds each). Higher is better.

set (Section 4.1), with canonical-holdout SNR/SDR/wrap-jump for the same method set from the **SOTA matrix**. Figures 8–9 plot the same ranking. Primary reading is absolute prolonged- $R$  rank (historical board; see Limitations): neural favorite 0.977, corrupt $\rightarrow$ corrupt N2N 0.970, no-bake 0.965, poly 0.966, seam\_fir3 0.955, DualCosine 0.814 (historical whole-curve board; not the v10.1  $R_{\text{blend}}$  four-board in Table 4). Fixed MLP-on- $R$  and CNN/U-Net-lite-on- $R$  (no outer NAS) sit between DualCosine and the meta favorite. Paired Wilcoxon signed-rank (normal approx.) of favorite vs DualCosine on the 20 waveforms:  $W=0$ ,  $p \approx 8.9 \times 10^{-5}$ , mean  $\Delta R = +0.162$  (bootstrap 95% CI [0.155, 0.170]); vs no-bake the multifamily mean gap is smaller ( $\approx +0.012$ ) but still favors the searched bake on this generator. Vs corrupt $\rightarrow$ corrupt N2N the mean gap is smaller still ( $\approx +0.007$  on this prolonged- $R$  board).

### 5.8 Hard cliffs expose classical fade failure

Does high no-bake  $R$  hide DualCosine failure on large wrap-jumps? Table 8 stratifies a 4,096-tile holdout draw (seed 20260719) by engine wrap-jump percentiles (p75 $\approx$  1.387, p90 $\approx$  1.832; frozen in the cliff-strata data). This board uses whole-curve prolonged  $R$  (historical; not  $R_{\text{blend}}$ ). No-bake  $R$  can stay high on mild cliffs because residual mass re-

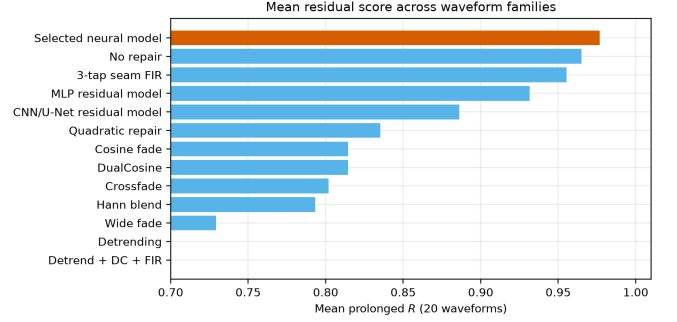


Figure 9: Multi-family mean prolonged  $R$  by method (same 20-waveform board as Table 7).

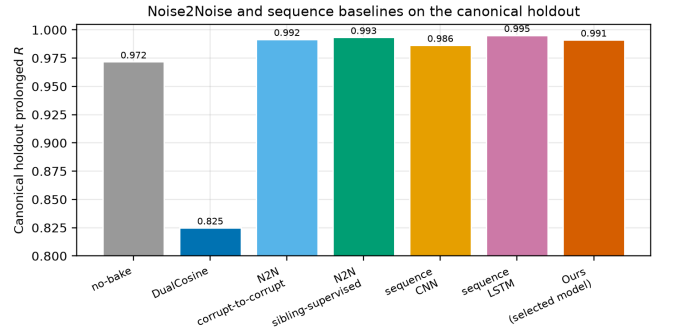


Figure 10: Canonical holdout prolonged  $R$ : N2N and seq baselines vs Ours (neural favorite). Train seeds 424242/424243 are disjoint from holdout 20260719.

mains small relative to ideal RMS. DualCosine collapses on hard cliffs ( $0.819 \rightarrow 0.657$ ), while the meta favorite holds ( $R \approx 0.9915$ ) and corrupt $\rightarrow$ corrupt N2N stays slightly ahead ( $R \approx 0.9922$  on all / top-10%). Favorite wrap-jump on the top-10% subset stays  $\approx 1.83$  (vs no-bake 2.09). The claim is tiled residual repair, not endpoint-zeroing. **Edge RMSE** is the locked required seam-local secondary (EVAL\_PROTOCOL): on the top-10% subset it drops from no-bake 0.095 to favorite 0.021 (N2N corrupt $\rightarrow$ corrupt also 0.021; DualCosine 0.990). Click energy remains an optional diagnostic.

### 5.9 Noise2Noise and sequence baselines

How does DenoiseOpt compare to true Noise2Noise-style and lightweight seq restorers on the same generator? Primary corrupt $\rightarrow$ corrupt N2N (20k Adam steps, 53k params, train seed 424242) reaches canonical  $R \approx 0.9917$ , matching the meta favorite within  $\approx 0.001$ . Secondary sibling-supervised N2N reaches  $R \approx 0.9933$ . A bidirectional LSTM (76k params, 15k steps, train seed 424243) is the supervised ceiling at  $R \approx 0.9952$ . A tiny depthwise 1D CNN (3.2k params) reaches  $R \approx 0.9864$ . Holdout tiles never enter training. Classical DualCosine / seam\_fir3 remain in Table 8. Figure 10 plots these canonical holdout scores beside no-bake, DualCosine, and the neural favorite.

Table 7: Multi-family board (20 waveforms; historical prolonged  $R$ ).  $\Delta R^*$  and  $ms^*$  vs Dual Cosine only. N2N/seq use train seeds 424242/424243.

| Method              | $R$ (20-wave)     | SNR (dB)       | SDR (dB)       | wrap-jump       | $ms^*$ | params | $\Delta R^*$ |
|---------------------|-------------------|----------------|----------------|-----------------|--------|--------|--------------|
| neural favorite     | $0.977 \pm 0.010$ | $35.0 \pm 3.2$ | $35.1 \pm 3.2$ | $0.90 \pm 0.14$ | 2.44   | 37 489 | +0.166       |
| N2N corrupt→corrupt | $0.970 \pm 0.021$ | $33.9 \pm 4.1$ | $34.0 \pm 4.1$ | $0.90 \pm 0.15$ | –      | 53 506 | +0.167       |
| seq CNN1D           | $0.969 \pm 0.016$ | $32.2 \pm 3.5$ | $32.4 \pm 3.5$ | $0.92 \pm 0.15$ | –      | 3 242  | +0.162       |
| N2N sibling-sup.    | $0.969 \pm 0.022$ | $33.7 \pm 4.3$ | $33.8 \pm 4.3$ | $0.91 \pm 0.15$ | –      | 53 506 | +0.168       |
| poly seam ( $d=3$ ) | $0.966 \pm 0.008$ | $31.2 \pm 2.1$ | $31.3 \pm 2.1$ | $0.91 \pm 0.15$ | 1.47   | 0      | +0.148       |
| no-bake             | $0.965 \pm 0.008$ | $30.9 \pm 1.9$ | $31.0 \pm 1.9$ | $0.91 \pm 0.15$ | 0.00   | 0      | +0.147       |
| seq LSTM            | $0.956 \pm 0.037$ | $32.2 \pm 5.8$ | $32.3 \pm 5.8$ | $0.86 \pm 0.15$ | –      | 75 746 | +0.170       |
| seam_fir3           | $0.955 \pm 0.005$ | $28.1 \pm 1.2$ | $28.1 \pm 1.2$ | $0.46 \pm 0.08$ | 0.59   | 0      | +0.136       |
| MLP-on- $R$         | $0.932 \pm 0.006$ | $24.6 \pm 0.9$ | $24.6 \pm 0.9$ | $0.64 \pm 0.07$ | 2.76   | 8 604  | +0.113       |
| CNN/U-Net-on- $R$   | $0.886 \pm 0.012$ | $19.5 \pm 0.9$ | $19.5 \pm 0.9$ | $0.48 \pm 0.06$ | 5.01   | 11 752 | +0.069       |
| classic quadratic   | $0.835 \pm 0.012$ | $17.9 \pm 1.1$ | $17.7 \pm 1.2$ | $0.32 \pm 0.05$ | 1.78   | 0      | +0.020       |
| DualCosine          | $0.814 \pm 0.013$ | $16.9 \pm 1.2$ | $16.8 \pm 1.2$ | $0.32 \pm 0.05$ | 1.48   | 0      | 0            |
| cosine fade         | $0.814 \pm 0.013$ | $16.9 \pm 1.2$ | $16.8 \pm 1.2$ | $0.32 \pm 0.05$ | 2.64   | 0      | 0            |
| crossfade           | $0.802 \pm 0.013$ | $16.7 \pm 1.2$ | $16.4 \pm 1.2$ | $0.91 \pm 0.15$ | 1.70   | 0      | −0.013       |
| hann blend          | $0.793 \pm 0.015$ | $16.1 \pm 1.2$ | $15.8 \pm 1.2$ | $0.32 \pm 0.05$ | 0.57   | 0      | −0.020       |
| soft wide fade      | $0.729 \pm 0.016$ | $14.0 \pm 1.1$ | $13.6 \pm 1.1$ | $0.63 \pm 0.08$ | 3.69   | 0      | −0.082       |
| detrend             | $0.375 \pm 0.040$ | $5.5 \pm 1.0$  | $5.4 \pm 1.0$  | $0.00 \pm 0.00$ | 0.12   | 0      | −0.417       |
| ensemble DC+FIR     | $0.368 \pm 0.040$ | $5.1 \pm 1.0$  | $5.0 \pm 1.0$  | $0.12 \pm 0.02$ | 1.99   | 0      | −0.422       |

Table 8: Cliff strata on 4,096 holdout tiles (historical prolonged  $R$ ). Strata by engine wrap-jump.

| Method              | all $R$ | all jump | top25 $R$ | top25 jump | top10 $R$ | top10 jump |
|---------------------|---------|----------|-----------|------------|-----------|------------|
| seq LSTM (ceiling)  | 0.9953  | 0.865    | 0.9955    | 1.637      | 0.9955    | 1.810      |
| N2N sibling-sup.    | 0.9936  | 0.879    | 0.9936    | 1.668      | 0.9934    | 1.842      |
| N2N corrupt→corrupt | 0.9922  | 0.870    | 0.9924    | 1.647      | 0.9922    | 1.821      |
| neural favorite     | 0.9911  | 0.869    | 0.9915    | 1.645      | 0.9915    | 1.825      |
| seq CNN1D           | 0.9863  | 0.881    | 0.9869    | 1.684      | 0.9867    | 1.871      |
| no-bake             | 0.9715  | 0.913    | 0.9713    | 1.797      | 0.9667    | 2.094      |
| seam_fir3           | 0.9611  | 0.456    | 0.9461    | 0.893      | 0.9429    | 1.034      |
| DualCosine          | 0.8193  | 0.335    | 0.6864    | 0.290      | 0.6574    | 0.335      |

$n$ : all 4096, top25 1024, top10 410.

Table 9: Required seam-local secondary on top-10% wrap-jump tiles ( $n=410$ ): edge RMSE (lower better). Frozen in the [cliff-strata data](#).

| Method              | top10 edge RMSE |
|---------------------|-----------------|
| seq LSTM            | 0.011           |
| N2N sibling-sup.    | 0.018           |
| neural favorite     | 0.021           |
| N2N corrupt→corrupt | 0.021           |
| seq CNN1D           | 0.035           |
| no-bake             | 0.095           |
| seam_fir3           | 0.164           |
| DualCosine          | 0.990           |

### 5.10 Factory exports and AKWF cycles

Does the wrap protocol transfer beyond synthetic sine cliffs onto true exports and third-party OA cycles? Table 10 scores ReelSynth-exported factory periods (primary realism,  $n=25$ ;

byte-true factory frames resampled to  $L=256$ ) and Adventure Kid Waveforms (AKWF) CC0 single-cycle WAVs (secondary,  $n=24$ ) after close-seam idealization and the same open-wrap cliff. Procedural stand-ins are demoted to tertiary smoke and no longer carry the primary realism claim. On exported factory periods the favorite ( $R \approx 0.911$ ) trails no-bake / seam\_fir3 / poly while still beating Dual Cosine (0.883). On AKWF OA cycles the favorite ( $R \approx 0.970$ ) matches no-bake and beats Dual Cosine (0.936). Export gaps are listed in Section 9.

### 5.11 Polynomial baseline and endpoint pinning

Does a cheap classical poly fitter close the residual, and does endpoint pinning show the wrap-jump vs  $R$  tradeoff? A seam-local degree-3 polynomial fitter (no learning) reaches canonical  $R \approx 0.972$  ( $\approx$  no-bake) with wrap-jump essentially unchanged ([polynomial results](#)). SSM seq models are deferred; the LSTM remains the supervised seq ceiling. An endpoint-pin control ([pinning results](#)) drives wrap-jump to 0 on all /

Table 10: Wavetable-native wrap protocol. Close-seam ideal  $\rightarrow$  open-wrap cliff (seed 20260719). Mean prolonged  $R$ . Primary = ReelSynth export; secondary = AKWF CC0 files.

| Method                            | Export ( $n=25$ ) | AKWF OA ( $n=24$ ) |
|-----------------------------------|-------------------|--------------------|
| endpoint-pin (mean)               | 0.939             | 0.978              |
| seam_fir3                         | 0.971             | 0.975              |
| poly seam ( $d=3$ )               | 0.967             | 0.970              |
| no-bake                           | 0.967             | 0.969              |
| neural favorite                   | 0.911             | 0.970              |
| DualCosine                        | 0.883             | 0.936              |
| N2N corrupt $\rightarrow$ corrupt | 0.869             | 0.974              |
| seq CNN1D                         | 0.839             | 0.962              |
| seq LSTM                          | 0.769             | 0.948              |

hard subsets while dropping  $R$  (all 0.906; hard 0.822). Methods that zero wrap-jump are not the same objective as prolonged  $R$  (Limitations).

### 5.12 Classical virtual-analog seam repairs

Do the cited VA antialias tools [1–3] beat DualCosine on prolonged  $R$  when applied as cycle-local seam residuals?

**What each operator changes.** Figure 11 shows the family on one high-wrap sine+cliff tile (same seed and tile as Figure 2). **BLIT/BLEP** (Stilson/Smith lineage) treats the wrap as a value step. It subtracts a band-limited step residual (here a raised-cosine BLEP-family lobe scaled by the measured wrap jump) so the tiled click spectrum is softened near the seam. **PolyBLEP** (Nam et al.) is a cheap polynomial surrogate of that step residual with fractional-delay support near phase wrap. It edits only a few samples on each side of the discontinuity. **BLAMP** (Esqueda et al.) corrects a slope or corner jump (discontinuity in the first derivative), which matters for triangles, rectification, and hard clipping. On a pure value cliff the slope jump is small, so BLAMP is nearly a no-bake passthrough. **DualCosine** (our classical bake baseline) fades both ends of the stored period with raised-cosine windows. It does not insert a BLEP-style residual. It trades wrap energy for a wide end-fade distortion that prolonged  $R$  penalizes on hard cliffs.

**Scores.** Table 11 reports batch means from the [VA results](#) (seed 20260719, batch 64). Implementation is released in the [ReelSynth repository](#) (PolyBLEP matches `osc::va::poly_blep`; BLIT/BLEP uses a raised-cosine step residual; BLAMP applies a polyBLAMP lobe to the wrap slope jump). PolyBLEP reaches mean  $R \approx 0.929$  ( $\Delta R \approx +0.104$  vs DualCosine) but trails no-bake / `seam_fir3` / the meta favorite. BLIT/BLEP nearly zeros wrap-jump (0.004) while dropping mean  $R$  to 0.868 and collapsing on hard cliffs ( $R \approx 0.712$ ). BLAMP is near-no-bake on this value-cliff geometry (mean  $R \approx 0.972$ ). On the annotated severe tile in Figure 11, tile  $R$  is lower still (PolyBLEP  $\approx 0.869$ , BLIT/BLEP  $\approx 0.703$ , DualCosine  $\approx 0.603$ , BLAMP  $\approx$  engine), which matches the hard-cliff strata. These classical tools are scored

here, not only cited. They beat DualCosine on mean  $R$  in places. None matches the favorite on prolonged  $R$ .

### 5.13 When search helps vs classical methods

Per-cycle  $\Delta R$  on export, AKWF, Rust `sound_bench`, and sine+cliff holdout ([transfer results](#)): favorite win-rate vs Dual Cosine is high on sine cliffs (1.00) and AKWF (0.88), and moderate on export (0.64) / Rust (0.75); win-rate vs no-bake is high only on sine cliffs (0.92) and collapses on export (0.24) / Rust (0.20). Search value is highest on hard cliffs and when compact bake graphs are needed without engine $\rightarrow$ ideal labels at search time. Export / Rust gaps vs no-bake are listed in Section 9.

### 5.14 Transfer to Rust engine tiles

Table 12 scores the Python-trained favorite on 20 Rust-exported tiles. The favorite beats Dual Cosine (mean  $\Delta R + 0.063$ , Wilcoxon  $p \approx 0.009$ ) but trails no-bake and `seam_fir3` on absolute  $R$ . The primary SOTA claim remains the Python multi-family matrix.

### 5.15 Vibrato spectrograms

Do wrap-seam differences stay visible under slow vibrato, beyond static tiled periods? Figure 16 renders the same hold-out cracked period, DualCosine bake, and refit **Ours (hybrid GA-PPO)** champion under shared sinusoidal vibrato ( $\pm 3\%$  depth at 5 Hz around 220 Hz). Panels (a–c) show magnitude spectrograms; (d–e) show DualCosine–no-bake and Ours–no-bake differences; (g) reports cycle-local prolonged  $R$  alongside a modulated-playback residual under the same pitch envelope. On the annotated high-wrap tile, Ours retains high cycle  $R$  and high modulated  $R$ , while DualCosine remains the weakest classical comparator. This is objective spectrogram / residual evidence only. It is not a formal listening study. Protocol: [bench\\_vibrato\\_spectrogram.py](#); artifacts: [vibrato folder](#).

### 5.16 Downloadable audio samples

As an audible companion to Figure 7, we release five fixed-pitch (A4, 3 s, 44.1 kHz mono) wavetable clips for no-bake, DualCosine, and Ours-healed periods from the matched-suite holdout ([hear-sample WAVs](#); rebuild: [export\\_meta\\_hear\\_samples.py](#)). Figure 17 shows short waveform excerpts from those WAVs with per-clip absolute  $R$ . Readers can download and listen; we do *not* report formal MOS/MUSHRA or claimed A/B listening scores.

### 5.17 Factory and Adventure Kid waveform examples

Beyond the synthetic sine+cliff narrative, Figure 18 shows a compact gallery of true ReelSynth-exported factory periods (one mid-morph frame per bank) and Adventure Kid Waveforms (AKWF) CC0 single-cycle files already used by the wrap protocol. Scored means remain in Table 10 / [wavetable results](#); this panel is diversity evidence only. No new NAS was run for the gallery.



Classical VA seam techniques | seed=20260719, tile=46, |wrap|=2.283, L=256, periods=3

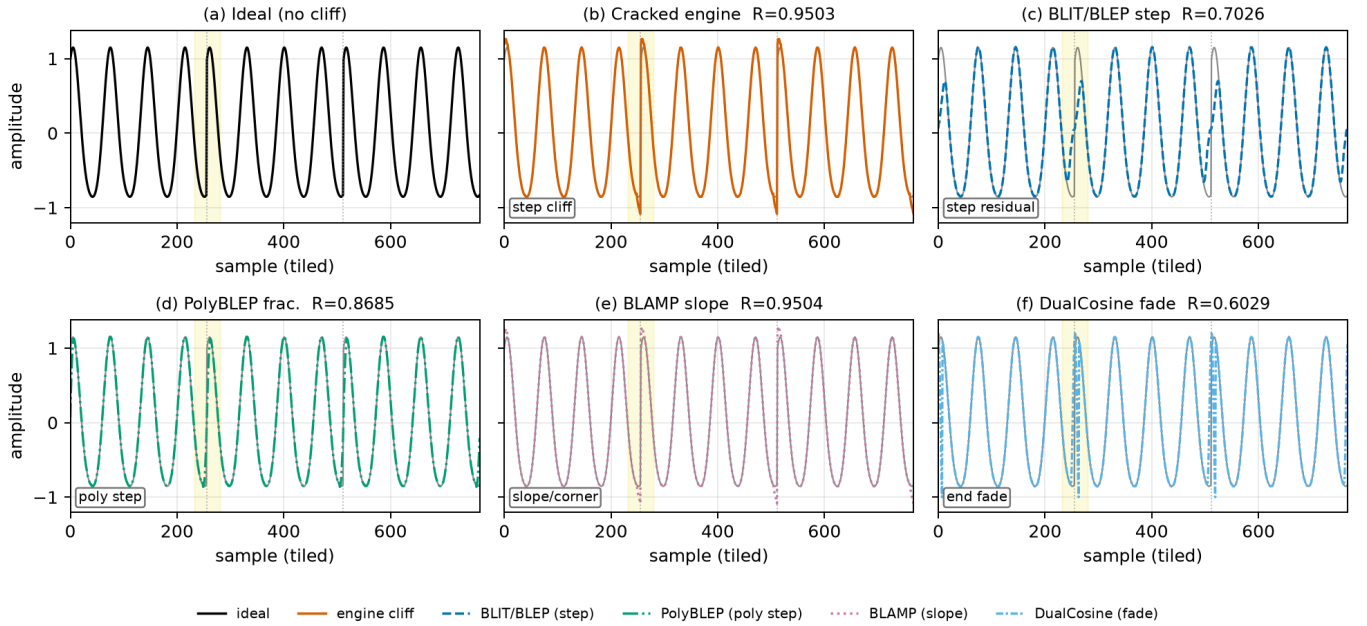


Figure 11: Classical VA seam techniques on one cracked sine+cliff tile (seed 20260719, tile 46, |wrap|=2.283,  $L=256$ , three tiled periods). Yellow band marks the first seam neighborhood. Panel tile  $R$  (1 = best): (a) ideal (unscored sibling). (b) cracked engine  $R=0.9503$ . (c) BLIT/BLEP step residual  $R=0.7026$ . (d) PolyBLEP fractional-delay residual  $R=0.8685$ . (e) BLAMP slope/corner residual  $R=0.9504$  (near no-bake on value cliffs). (f) DualCosine end fade  $R=0.6029$ . Colorblind-safe hues with distinct linestyles for B&W print. Batch means appear in Table 11. Accessibility: six-panel comparison of ideal, cracked, BLIT/BLEP, PolyBLEP, BLAMP, and DualCosine.

Table 11: Classical VA seam repairs on the residual protocol (seed 20260719). Canonical holdout:  $R$ , SNR/SDR, wrap-jump, edge RMSE. Cliff top-10%:  $R$  ( $n=410$ ). Multi: mean  $R$  over 20 generative waveforms.

| Method     | $R$    | SNR  | SDR  | jump  | edge  | top10 $R$ | multi $R$ |
|------------|--------|------|------|-------|-------|-----------|-----------|
| BLAMP      | 0.9718 | 32.6 | 32.7 | 0.873 | 0.080 | 0.9667    | 0.965     |
| no-bake    | 0.9718 | 32.6 | 32.7 | 0.873 | 0.080 | 0.9667    | 0.965     |
| seam_fir3  | 0.9610 | 29.6 | 29.6 | 0.438 | 0.112 | 0.9429    | 0.955     |
| PolyBLEP   | 0.9288 | 25.9 | 25.8 | 0.102 | 0.205 | 0.8641    | 0.924     |
| BLIT/BLEP  | 0.8680 | 20.4 | 20.3 | 0.004 | 0.365 | 0.7116    | 0.860     |
| DualCosine | 0.8249 | 18.0 | 17.8 | 0.292 | 0.506 | 0.6574    | 0.814     |

Latency (canonical, CUDA): PolyBLEP  $\approx 1.43$  ms/batch; DualCosine  $\approx 1.06$ ; BLIT/BLEP  $\approx 123$ ; BLAMP  $\approx 54$ . Frozen in the VA results.

Table 12: Rust sound\_bench transfer ( $n=20$ ). Prolonged  $R$ ;  $\Delta R$  vs Dual Cosine.

| Method                    | $R$ (20 Rust tiles) | $\Delta R$ vs Dual Cosine |
|---------------------------|---------------------|---------------------------|
| no-bake                   | $0.928 \pm 0.084$   | +0.166                    |
| seam_fir3                 | $0.896 \pm 0.077$   | +0.134                    |
| neural favorite           | $0.825 \pm 0.121$   | +0.063                    |
| classic quadratic         | $0.788 \pm 0.110$   | +0.026                    |
| Dual Cosine / cosine fade | $0.762 \pm 0.118$   | 0                         |

## 5.18 Transfer to bearings, ECG, and synthetic cycles

**Setup reminder.** Table 13 reports whole-curve prolonged residual  $R$  after training/searching DenoiseOpt (hybrid\_lstm, 250 outer iterations, seed 1902771841) on each transfer board from Section 4.2 ( $n=256$  periods,  $L=256$ ). Columns are: CWRU/MFPT/Paderborn bearing revolutions, MIT-BIH/PTB-XL ECG beats, and synthetic CNC/PMU pilots. This pilot uses the historical prolonged- $R$  FitCell objective (frozen results\_table.json); it is *not* a v10.1  $R_{\text{blend}}$  retag. Domain-trained Noise2Noise-style SeamN2N (corrupt $\rightarrow$ corrupt, 4000 Adam steps, train seed 424242, holdout seed 20260719; our stack, not Lehtinen’s reference

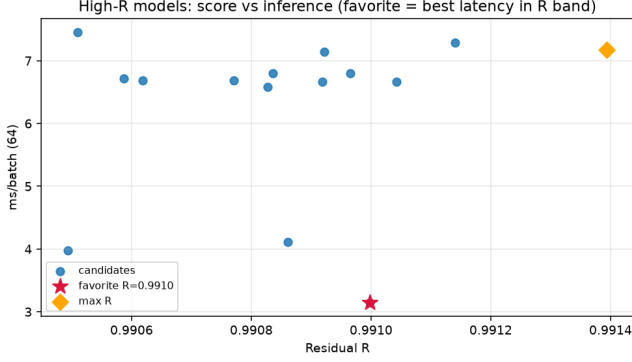


Figure 12: High- $R$  fitted operators: residual vs CUDA latency. Star: favorite.

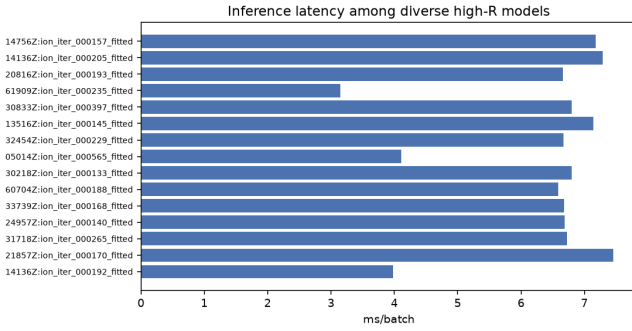


Figure 13: Inference latency for high- $R$  fitted models (CUDA, batch 64).

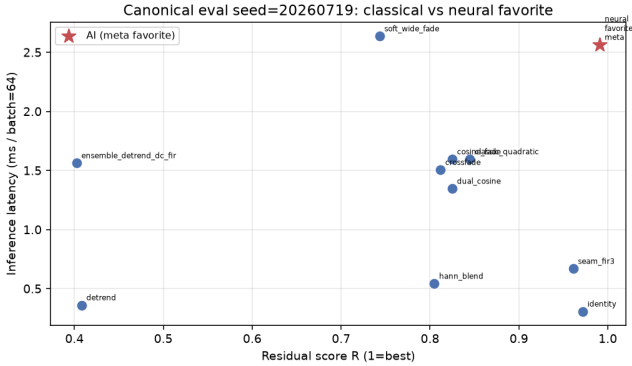


Figure 14: Canonical holdout: classical methods and favorite in the  $R$  vs ms/batch plane.

code) is scored on the same seven boards and appears as a row in Table 13 (debug  $R_{\text{blend}}$  lives in the artifact JSON). Author ECG Cycle-GAN and BeatDiff are included on MIT-BIH/PTB-XL as OOD wrap- $R$  probes (clinical restore  $\neq$  wrap- $R$ ; Table 14). Artifacts: [signal\\_heal\\_transfer](#).

**Takeaways.** Under prolonged  $R$ , Ours leads every classical-board column in Table 13, including Dual Cosine and SeamN2N on every domain. SeamN2N beats Dual Cosine everywhere and sits near no-bake on CWRU/MFPT/Paderborn,

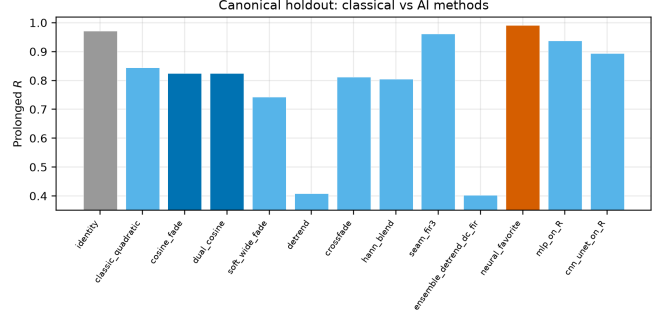


Figure 15: Canonical holdout ranking on prolonged  $R$  (left) and latency (right).

but trails Ours by a wide margin on ECG and synth CNC ( $R \approx 0.56$ – $0.65$  and  $0.48$  vs Ours  $> 0.93$ ). On MIT-BIH and PTB-XL, endpoint-pin remains a strong classical ECG row above SeamN2N; Ours still leads both. Author Operational Cycle-GAN on the same ECG wrap boards collapses under OOD wrap- $R$  ( $R \approx 0.07$ – $0.16$ ). Clinical ECG restore differs from the wrap residual objective, yet the author stack is now a Table 13 row rather than a deferred claim. Author BeatDiff (Drive Orbax prior, step 9360) as a one-step OOD wrap probe reaches  $R \approx 0.33$ – $0.37$ , above Cycle-GAN but still far below Ours/SeamN2N/no-bake on ECG. We do not treat Be-din native morph metrics as wrap- $R$ . Synthetic CNC shows the largest classical collapse with Ours near 0.992; SeamN2N only recovers to 0.4833. Synth PMU is the strongest SeamN2N row ( $R = 0.9789$ ) but still below Ours (0.9915). Paderborn wrap board shows Ours  $R = 0.9270$  vs SeamN2N 0.8387 and DualCosine 0.4710; an architecture-reuse residual bake on the AI Firdausi CNN\_1D\_2L conv backbone reaches  $R = 0.8390$  (near SeamN2N; not the published method). Separately, we train that CNN from scratch as a 4-class fault classifier on K001/KA04/KI04/KB23 (holdout acc 0.8590) and do not rename classification as wrap- $R$  (Table 14). Latency timings in Appendix B remain wavetable-checkpoint zero-shot; primary claim remains cycle-local wavetable seam restoration.

### 5.19 Listening protocol (no formal listening study)

Downloadable WAVs ([hear-sample WAVs](#)) and vibrato spectrograms support informal A/B inspection (Sections 5.15–5.16). Formal MOS / MUSHRA scores were not collected. Until a formal study runs, perceptual claims remain qualitative and secondary to residual scores. See Section 9.

## 6 Discussion

**Main story under  $R_{\text{blend}}$ .** The locked protocol does not crown the hybrid champion over Noise2Noise on the holdout (0.9697 vs 0.9750). Dual Cosine on that board sits near 0.541. The operative claim is narrower. Compact searchable repair operators outperform classical fades, stay competitive with Noise2Noise on multi-family means (13/20 wins), and hold on hard cliffs where Dual Cosine collapses (Table 4, Sec-

DenoiseOpt under slow vibrato playback | holdout seed=20260719, tile=46, |wrap|=2.283 | search seed=1902771841

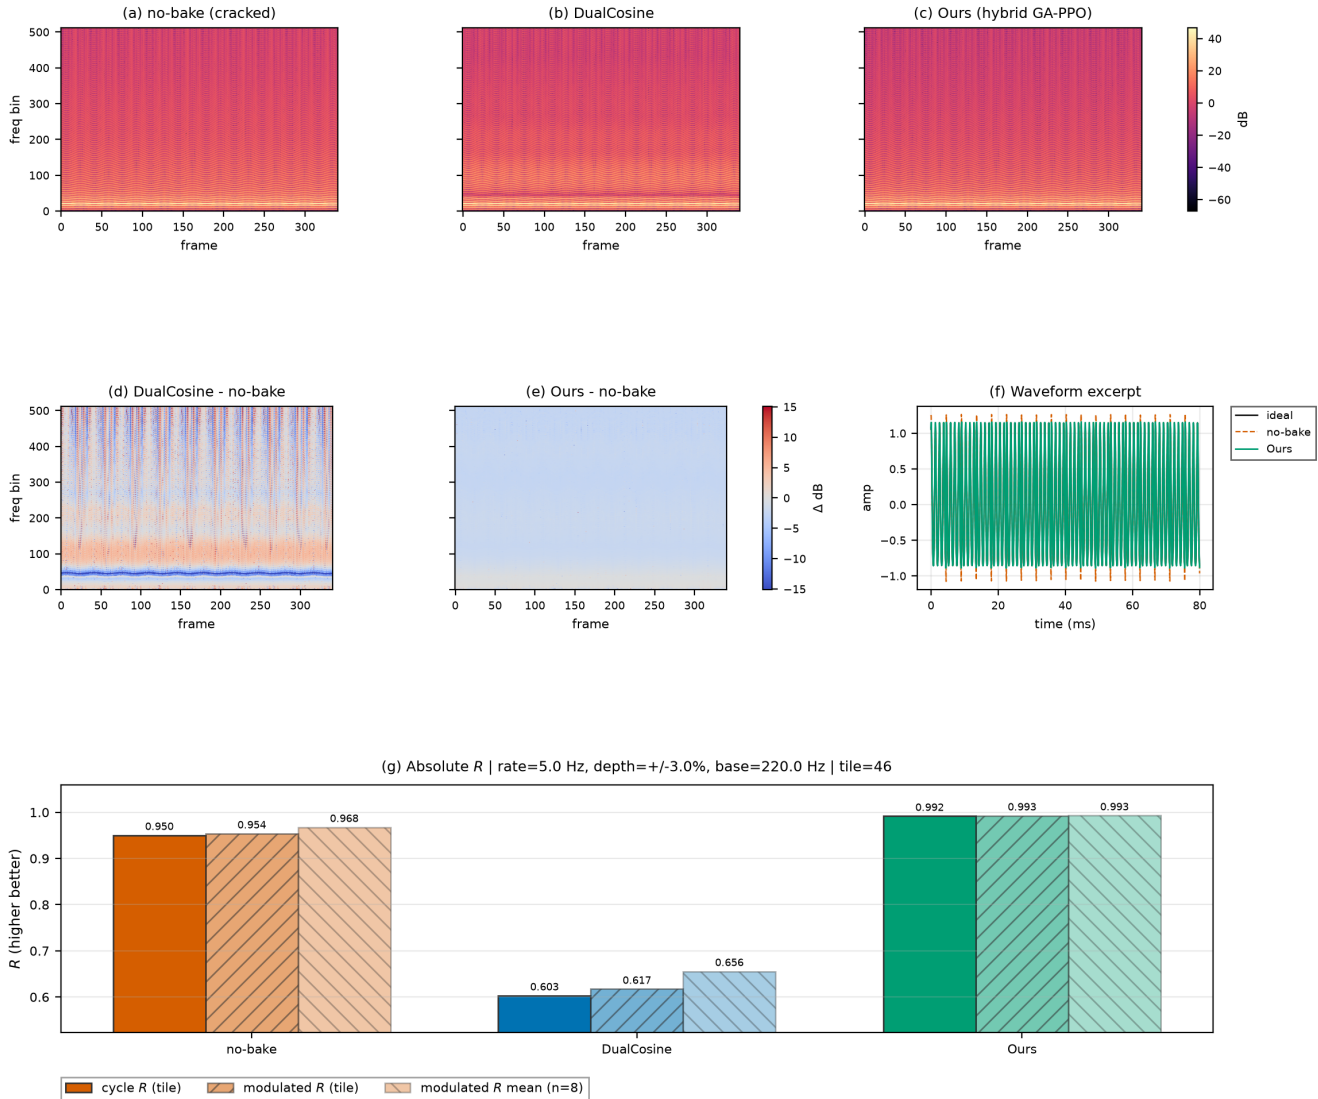


Figure 16: Slow-vibrato spectrogram eval on a high-wrap holdout tile (seed 20260719). (a–c) Magnitude spectrograms for no-bake, DualCosine, and Ours. (d–e) Spectrogram differences vs no-bake. (f) Short waveform excerpt. (g) Absolute  $R$ : cycle-local prolonged residual, modulated-playback residual on the same tile, and mean modulated  $R$  over top-wrap tiles. Accessibility: Okabe–Ito hues; difference maps use diverging coolwarm. Formal human A/B scores are out of scope.

tion 5.8). Older whole-curve numbers near  $R \approx 0.991$  belong in the historical boards only (Limitations).

**Which families stay hard.** Across large procedural benches, wrap error is uneven. Families such as `nonlinear`, `combo`, `triple_mix`, and `extreme_overlay` dominate the residual budget. `harmonic_fft` and `am_fm` are easier. Mean scores hide that structure.

**Search near the ceiling.** Under near-ceiling residuals, further gains are small in absolute units and sensitive to reward shaping and branch weights. Plateau adaptation (deeper oper-

ators, denser MoE graphs, higher GA/PBT weight) is the operational response inside one campaign. Matched outer-loop bake-offs and HP probes sit in Appendix B.

**Evidence beyond static tiles.** Vibrato spectrograms and downloadable hear WAVs support informal inspection (Sections 5.15–5.16). Sci/eng wrap transfer is a classical-board stress test (Section 5.18). Perceptual and scope limits are collected in Section 9.

Audible wrap-seam demos (fixed A4 playback) — downloadable WAVs under `reelsynth/brand/artifacts/meta_approach_compare/hear_samples/`

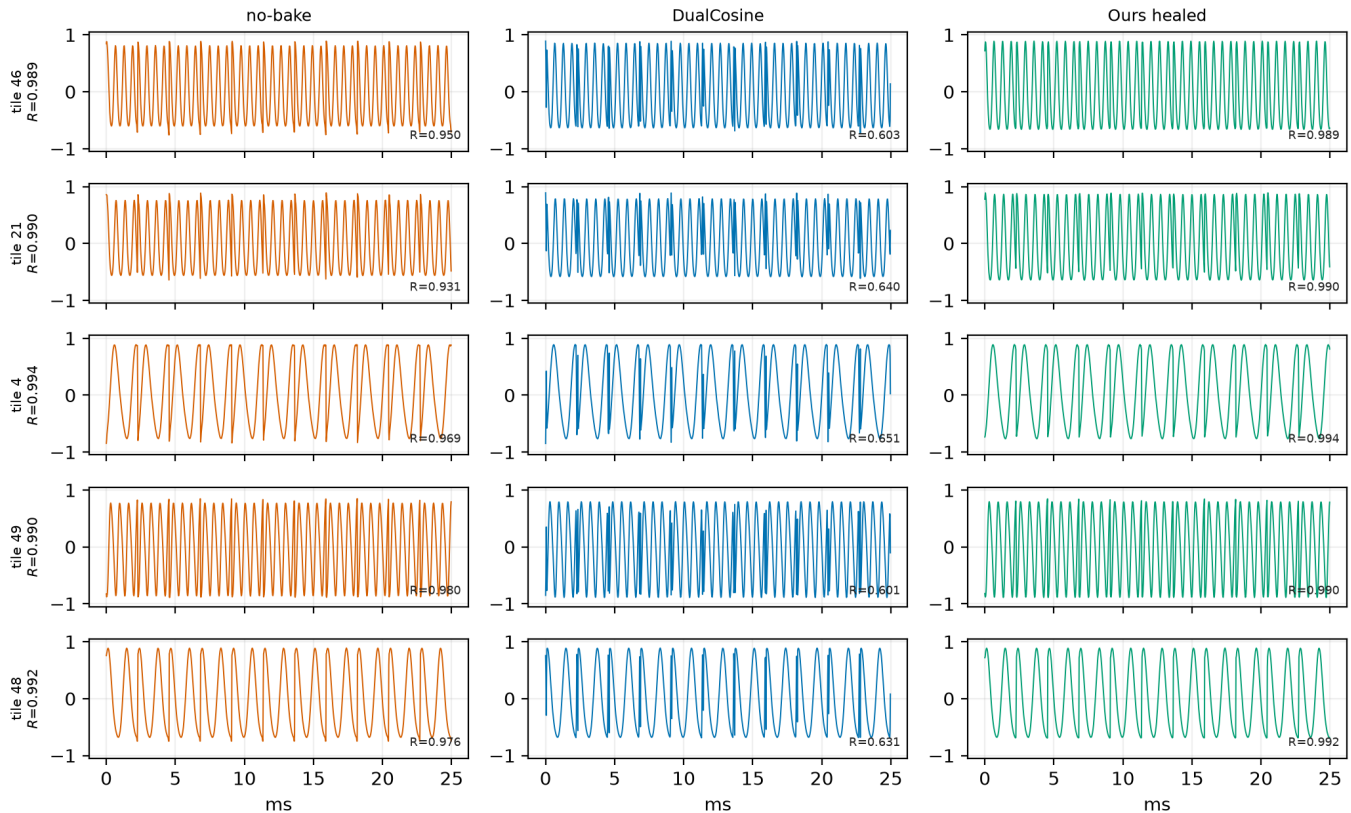


Figure 17: Hear-sample panel from the online WAV pack ([hear-sample WAVs](#); five holdout tiles; no-bake / DualCosine / Ours). Waveforms show the first  $\approx 25$  ms of each clip;  $R$  annotations are cycle-local prolonged residuals vs the ideal sibling. Not a formal listening study.

## 7 Tooling and AI use

**AI-assisted workflow.** The following tools assisted preparation; the authors verified all claims, numbers, and citations against code and frozen JSON artifacts.

- **Cursor** assisted software development (search runners, baselines, transfer benches, and figure scripts in the Reel-Synth repository).
- **SciSpace** assisted literature discovery and paper triage.
- **NotebookLM** assisted citation checks (bibliography entries cross-checked against open-access sources and the manuscript text).

AI did not invent experimental numbers. Fitting, residual scoring, baselines, and hybrid GPU search are conventional Rust / PyTorch with deterministic logs.

**Literature and reproducibility artifacts.** Open literature was also gathered with local OpenAlex / Crossref / arXiv providers; every bibliography entry has a downloadable OA PDF ([literature PDFs](#)). Audible demos: [hear-sample WAVs](#).

## 8 Broader impact and reproducibility

**Broader impact.** This work targets cycle-local wavetable seam repair for virtual-analog / software-instrument workflows. Misuse potential is low. The method does not enhance speech for surveillance, does not remove watermarks from protected media, and operates only on short synthetic periods. Training and search use procedural sine+cliff generators. No private studio stems are required for the reported tables. The main resource cost is GPU time on a consumer RTX 3090 (order of hours for the 5k-gate freeze, Table 17). Authors should not over-claim speech enhancement or production mastering quality from these metrics.

**Reproducibility.** Holdout seed 20260719. Hybrid search seed 1902771841. Primary code: <https://github.com/reeldemo/reelsynth> (search runner: [overnight\\_gpu\\_rl\\_arch.py](#); SOTA bench: [bench\\_sota\\_matrix.py](#); VA seam: [va\\_seam\\_blep.py](#)). Paper companion: <https://github.com/reeldemo/denoise-opt-meta>. Dependencies for the CUDA benches: Python 3.12, PyTorch 2.6+CUDA 12.4, NumPy/matplotlib. Rust/cargo



Compact wavetable diversity gallery (existing exports only; no new NAS)

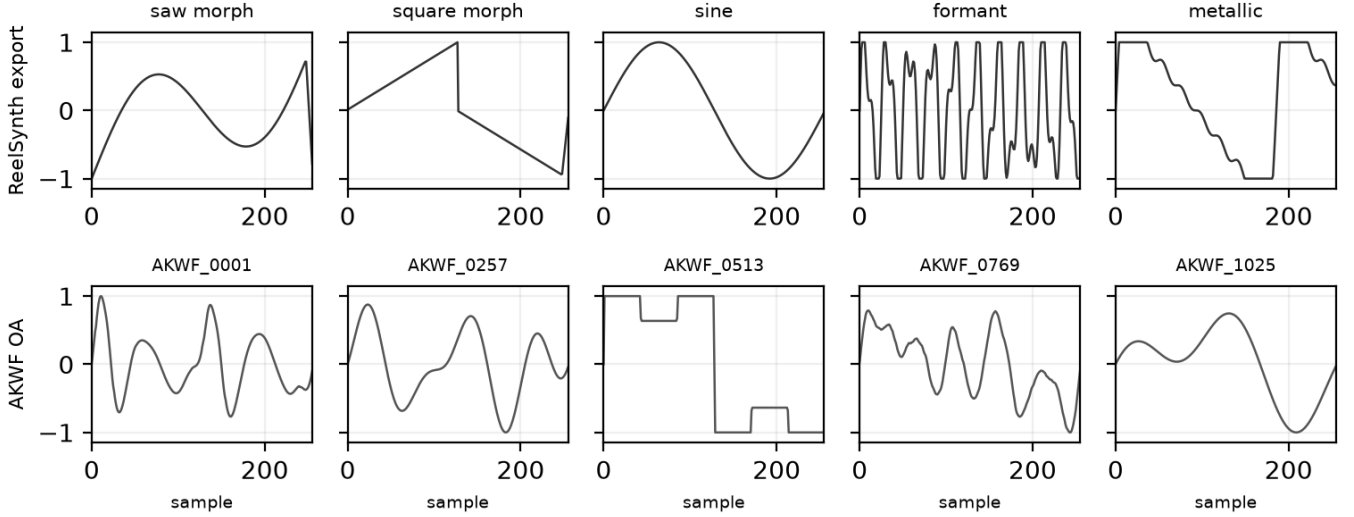


Figure 18: Compact wavetable diversity gallery from existing exports (one mid-morph dry frame per unique ReelSynth factory bank, top; matched AKWF CC0 cycles, bottom). No new NAS for this panel. Quantitative wrap scores: Table 10.

Table 13: Wrap-heal transfer under prolonged residual  $R$  (higher better; historical whole-curve score). DenoiseOpt trains/searches `hybrid_lstm` for 250 iterations per domain (seed 1902771841). Boards: CWRU/MFPT/Paderborn K001 bearing revolutions, MIT-BIH/PTB-XL ECG beats, synthetic CNC/PMU pilots ( $n=256$  periods each). SeamN2N: corrupt $\rightarrow$ corrupt holdout  $R$  (4000 steps, seed 424242). Cycle-GAN / BeatDiff: author weights, OOD wrap- $R$  on ECG only (— elsewhere; clinical  $\neq$  wrap- $R$ ).

| Method                                        | CWRU   | MFPT   | Paderborn | MIT-BIH | PTB-XL | synth CNC | synth PMU |
|-----------------------------------------------|--------|--------|-----------|---------|--------|-----------|-----------|
| Ours ( <code>hybrid_lstm</code> )             | 0.9623 | 0.9411 | 0.9270    | 0.9565  | 0.9379 | 0.9918    | 0.9915    |
| SeamN2N (ours, N2N-style)                     | 0.8686 | 0.8817 | 0.8387    | 0.6530  | 0.5702 | 0.4833    | 0.9789    |
| no-bake                                       | 0.8451 | 0.8657 | 0.8376    | 0.7495  | 0.7617 | 0.4499    | 0.9356    |
| endpoint-pin                                  | 0.5054 | 0.5446 | 0.5670    | 0.8650  | 0.8696 | 0.4096    | 0.9442    |
| <code>seam_fir3</code>                        | 0.4483 | 0.5726 | 0.5601    | 0.7662  | 0.7604 | 0.5344    | 0.9119    |
| DualCosine                                    | 0.4608 | 0.4830 | 0.4710    | 0.4137  | 0.5118 | 0.4943    | 0.8272    |
| BeatDiff (author, OOD) <sup>‡</sup>           | —      | —      | —         | 0.3693  | 0.3259 | —         | —         |
| Cycle-GAN (author, OOD)                       | —      | —      | —         | 0.0700  | 0.1555 | —         | —         |
| Al Firdausi backbone (wrap bake) <sup>†</sup> | —      | —      | 0.8390    | —       | —      | —         | —         |

<sup>†</sup>Architecture-reuse residual bake on author CNN\_1D\_2L conv blocks (not the published fault classifier; Paderborn only). <sup>‡</sup>Drive Orbax prior (step 9360), one-step denoise at  $\sigma=0.5$  after mono $\rightarrow$ 9-lead tile; not Bedin native metrics.

builds the separate engine hardness probe. Frozen numbers live under [brand/artifacts](#) (e.g. [sota\\_matrix.json](#), [va\\_seam\\_blep.json](#)). PESQ/STOI are omitted for non-speech cycles (domain mismatch). MUSHRA was not run.

### 8.1 Funding

This research received no external funding.

### 8.2 Author contributions (CRediT)

Julian M. Kleber: Conceptualization, Methodology, Software, Investigation, Formal analysis, Data curation, Writing (original draft), Writing (review and editing), Visualization.

### 8.3 Data availability

Frozen evaluation artifacts (JSON matrices, search history, fitted champions) are published with the companion repositories: <https://github.com/reeldemo/reelsynth> ([brand/artifacts](#)) and <https://github.com/reeldemo/denoise-opt-meta> ([artifacts](#) and this paper folder’s figures). All reported tables regenerate from those files plus the scripts named above. No private studio recordings were used.

### 8.4 Competing interests

None declared.

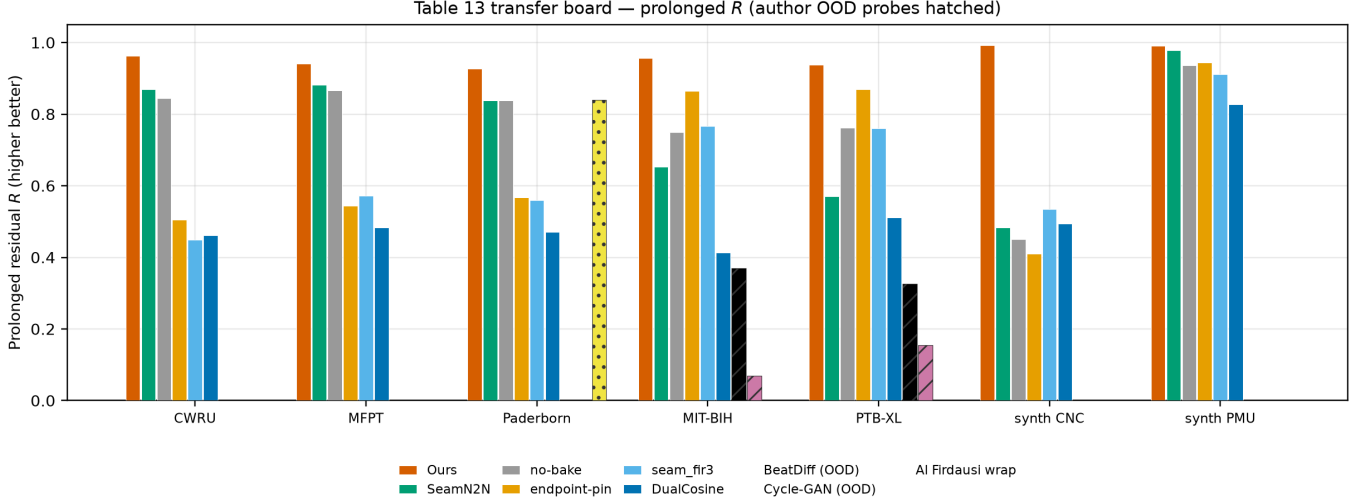


Figure 19: Grouped bars for Table 13: prolonged residual  $R$  by board and method (higher better; JSON-only). Core rows (Ours, SeamN2N, no-bake, endpoint-pin, `seam_fir3`, DualCosine) appear on all seven boards. Hatched bars are author OOD wrap- $R$  probes on ECG (BeatDiff, Cycle-GAN; clinical restore  $\neq$  wrap- $R$ ) and the Paderborn AI Firdausi architecture-reuse wrap bake (not the published fault classifier; see Table 14). Missing cells are omitted rather than zero-filled.

## 9 Limitations

We collect honesty notes here rather than repeating them through Results and Discussion.

- **Not a perceptual score.**  $R_{\text{blend}}$  and  $J$  use a procedural no-cliff sibling for seams and an engine-identity prior for the mid-cycle body. They do not measure listening quality. No formal MOS or MUSHRA was run. Downloadable WAVs and vibrato spectrograms support informal A/B only (Section 5.19). PESQ and STOI are excluded: primary cycles are non-speech wavetable tiles.
- **Locked story vs older whole-curve  $R$ .** Primary claims use  $R_{\text{blend}}$  under the v10.1 lock (Table 4). Many secondary tables and figures still report historical whole-curve prolonged  $R$  (canonical board, cliff strata, matched outer loops, VA board). Those boards are labeled as such; they must not overwrite the holdout gate reading ( $R_{\text{blend}} \approx 0.9697$  for Ours vs 0.9750 for Noise2Noise).
- **Domain Noise2Noise vs transfer depth.** Domain-trained Noise2Noise quality *was* run on the seven sci/eng transfer boards (Table 13); it trails Ours on every column under prolonged  $R$ . Latency timings in Appendix B still use the wavetable checkpoint zero-shot. Cycle-GAN / BeatDiff / real KIT-PMU / MOS remain incomplete where noted (Table 14): Cycle-GAN and BeatDiff have OOD wrap- $R$  probes only (clinical  $\neq$  wrap- $R$ ); Paderborn AI Firdausi CNN is trained from scratch as a native 4-class fault classifier (plus an optional arch-reuse wrap bake, labeled separately); PTB-XL is expanded lead-I (not multi-lead). Rust `sound_bench` scores classical rows and the favorite only.

- **Domain shift on exports.** On Factory+FX / Rust tiles the meta favorite can trail no-bake or FIR while still beating Dual Cosine. We do not claim universal factory superiority.
- **Search geometry.** Search scores Python generator draws. The Python multi-family matrix is primary; Rust export is secondary. Per-trial width is capped; Demucs-/diffusion-scale stacks were screened out.
- **No wrap-closure theorems.** Endpoint-pin can zero wrap-jump while residual falls. We claim tiled residual repair toward  $r^*$ , not endpoint closure or search convergence.
- **Transfer scope.** Sci/eng wrap transfer is a classical-board pilot, not deep CWRU/ECG SOTA (Table 14).
- **Hyperparameter probe.** The  $\pm 50\%$  one-at-a-time probe (Appendix B) is not a full re-search of Table 2.

### 9.1 Future work

A follow-up can treat which sounds fail as the primary object: stratified residual heatmaps over procedural families, cliff-size conditioning, and family-specialist operators under the same outer loop. That paper would cite the present hybrid protocol as baseline and ask whether further gains are mainly architecture or coverage over hard families. Formal listening (even a small author-plus-colleague preference note on high-wrap tiles) remains the clearest missing perceptual check.

## 10 Conclusion

DenoiseOpt casts wavetable wrap discontinuity as cycle-local seam repair under blended residual  $R_{\text{blend}}$  and latency-aware

Table 14: Author-method and data-cut status under this residual protocol (no invented scores).

| Scope                                | Note                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SeamN2N (ours, N2N-style)            | Scored on all seven Table 13 boards (holdout prolonged $R$ ; expanded PTB-XL $R=0.5702$ ; not Lehtinen code)                                                                                                                                                                                                                                                              |
| Cycle-GAN (ECG, author)              | OOD wrap- $R$ in Table 13 (MIT-BIH $R=0.0700$ ; PTB-XL $R=0.1555$ ); clinical restore $\neq$ wrap- $R$                                                                                                                                                                                                                                                                    |
| BeatDiff (Bedin NeurIPS 2024)        | OOD wrap- $R$ in Table 13 (MIT-BIH $R=0.3693$ ; PTB-XL $R=0.3259$ ); Drive prior (not HF); clinical morph prior $\neq$ wrap- $R$                                                                                                                                                                                                                                          |
| Paderborn KAt deep (Al Firdausi CNN) | Trained CNN_1D_2L from scratch (not frozen model.pth); bearings K001/KA04/KI04/KB23; file-holdout seed 20260726, train seed 42, 20 epochs; 4-class holdout acc 0.8590 ( $n=2560$ segs; NOR-MAL/IR/OR/OR+IR). Classifier wrap- $R$ N/A. Arch-reuse wrap bake $R=0.8390$ (4000 steps; Table 13 <sup>†</sup> ). Wrap board: Ours 0.9270 / SeamN2N 0.8387 / DualCosine 0.4710 |
| Expanded PTB-XL                      | records500 lead-I expanded ( $\sim 2k + \_hr$ records; board $n=256$ ; Ours $R=0.9379$ ; multi-lead still out of scope)                                                                                                                                                                                                                                                   |
| Real KIT CNC / IEEE PMU              | Synthetic pilots only (download walls)                                                                                                                                                                                                                                                                                                                                    |
| Formal MOS / MUSHRA                  | Not collected                                                                                                                                                                                                                                                                                                                                                             |

objective  $J$ . A hybrid GA+PPO(+PBT) outer loop searches compact repair operators without paired clean targets at search time. Under the locked protocol, Noise2Noise is the neural gate and Dual Cosine is the classical fade baseline. The hybrid freeze reaches  $R_{\text{blend}} \approx 0.970$  on holdout but does not clear Noise2Noise ( $\approx 0.975$ ). Dual Cosine sits near 0.541. On multi-family boards Ours edges Noise2Noise on mean score. On hard cliffs classical fades collapse while searched operators hold. The contribution is searchable repair operators for cycle-local DSP and synthesis seam restoration. Code: <https://github.com/reeldemo/reelsynth>, <https://github.com/reeldemo/denoise-opt-meta>.

## Acknowledgments

Compute for the CUDA hybrid search campaign used a local NVIDIA GeForce RTX 3090 workstation. Open literature was retrieved via the Klaut Research Gateway under open-access PDF constraints. No external collaborators contributed text, code, or experimental numbers for this preprint.

## Algorithm 1 ResidualScore

**Require:** Ideal cycle  $r^*$ , baked cycle  $y$ , periods  $N$

- 1:  $I \leftarrow \text{Tile}(r^*, N)$
- 2:  $Y \leftarrow \text{Tile}(y, N)$
- 3:  $r_{\text{rms}} \leftarrow \text{RMS}(Y - I)$
- 4:  $i_{\text{rms}} \leftarrow \max(\text{RMS}(I), \epsilon)$
- 5: **return**  $\text{clamp}(1 - r_{\text{rms}}/i_{\text{rms}}, 0, 1)$

## Algorithm 2 DualCosine baseline

**Require:** Engine cycle  $x$

- 1: Fade both ends of  $x$  with raised-cosine windows of width  $W$
- 2: **return**  $\text{ResidualScore}(r^*, x_{\text{faded}}, N)$

## Algorithm 3 No-bake (passthrough) control

**Require:** Engine cycle  $x$  (open-wrap cliff present)

- 1: **return**  $\text{ResidualScore}(r^*, x, N)$   $\triangleright$  no operator:  $x \mapsto x$

## A Algorithms

Companion pseudocode for the residual score, classical controls, FitCell, and hybrid outer-loop branches. Canonical narrative lives in Section 3; these listings mirror the [pseudocode notes](#) and the CUDA search runner.

## B Supplementary tables and figures

Material moved here for the conference-length reading path: matched outer-loop bake-off, branch/compute freezes, hyperparameter probe, transfer latency, and search-monitor plots. Primary claims remain in Sections 5–5.18.

### B.1 Matched-budget outer-loop comparison

Under a matched 5,000-evaluation budget with LSTM and xLSTM in the searchable bake vocabulary, how do Random NAS, Cont. CMA-ES, Arch REINFORCE, Aging evolution, and TPE Bayes NAS compare to Ours (hybrid GA+PPO)? Table 15 reports champion prolonged  $R$ ,  $\Delta R$  vs Dual Cosine, wall hours, and whether the champion graph used an LSTM or xLSTM block. This is an outer-loop bake-off under historical whole-curve prolonged  $R$ . Noise2Noise is not an outer-loop method here (see Tables 4 and 7). At the completed gate, Ours leads on absolute champion  $R$  ( $R \approx 0.99146$ ,  $\Delta R \approx +0.17488$  vs Dual Cosine  $\approx 0.81658$ ;  $\approx 8.46$  h), with Aging evolution second ( $R \approx 0.99079$ ). Neither Ours nor Aging evolution selected an LSTM block in the champion graph. Source: [matched-budget results](#) (search seed 1902771841).

### B.2 Ablations and compute

Table 16 reports branch-best freezes at the 5k gate from one hybrid history, plus isolated 150-iteration re-runs on the same search seed. Table 17 summarizes campaign compute.

### B.3 Hyperparameter sensitivity

One-at-a-time  $\pm 50\%$  probe of Table 2 knobs at 500 outer iterations (seed 1902771841). Not a full 5k re-search. Default champion  $R \approx 0.9888$ ; largest  $|\Delta R|$  among completed arms

**Algorithm 4** MoE soft gating over bake experts

---

**Require:** Cycle  $x$ , expert operators  $\{E_k\}_{k=1}^K$ , gate logits  $g \in \mathbb{R}^K$

- 1:  $w \leftarrow \text{softmax}(g)$
- 2:  $y \leftarrow \sum_{k=1}^K w_k E_k(x)$
- 3: **return**  $y$

---

**Algorithm 5** FitCell (inner loop)

---

**Require:** Architecture cfg, fit steps  $T$ , batch size  $B$

- 1: cell  $\leftarrow$  SeamCell(cfg); opt  $\leftarrow$  Adam(cell.params)
- 2: prev  $\leftarrow$  null; patience  $\leftarrow 0$
- 3: **for**  $t = 1, \dots, T$  **do**
- 4:   ideal, eng  $\leftarrow$  MakeBatch( $B$ )
- 5:   out  $\leftarrow$  ApplyOps(eng, cell, cfg.ops)
- 6:    $R \leftarrow$  mean ResidualScore(ideal, out)
- 7:   loss  $\leftarrow 1 - R$
- 8:   **if** finite(loss) **then** AdamStep(opt, loss)
- 9:   **end if**
- 10:   **if** prev  $\neq$  null and  $|\text{prev} - R| / \max(|\text{prev}|, \epsilon) < 10^{-4}$  **then**
- 11:     patience  $\leftarrow$  patience + 1; **if** patience  $\geq 3$  **then**
- 12:       **break**
- 13:     **else**
- 14:       patience  $\leftarrow 0$
- 15:     **end if**
- 16:   prev  $\leftarrow R$
- 17: **end for**
- 18: **return** cell,  $R$

---

**Algorithm 6** GA tournament step

---

**Require:** Population  $P$ , tournament size  $k$ , crossover rate  $p_c$ , mutation rate  $p_m$

- 1: Sample  $k$  genomes; parents  $\leftarrow$  top-2 by  $R$
- 2: child  $\leftarrow$  Crossover(parents) with prob.  $p_c$ , else clone elite
- 3: Mutate(child) with rate  $p_m$  (ops, depth, operator type,  $\theta$ )
- 4: Fit and evaluate child; insert into  $P$  (replace worst if full)
- 5: **return** updated  $P$

---

$\approx 0.0123$  (50% lower learning rate). All 11/11 arms completed.

**B.4 Transfer inference latency**

Table 19 and Figure 23 pair with the prolonged- $R$  transfer board (Table 13). N2N latency uses the wavetable checkpoint zero-shot; domain-trained N2N quality scores are in Table 13.

**B.5 Search-monitor figures****C Transfer artifact locations**

Full cross-domain wrap-heal transfer protocol, classical-board tables, and deep-model status rows are in Sections 4.2–5.18 of the main text. Algorithms for the residual score and hybrid loop remain in Appendix A. Raw JSON and figures: [sig-nal\\_heal\\_transfer](#).

**Algorithm 7** PPO architecture update

---

**Require:** Actor-critic  $\pi_\phi$ , clip  $\epsilon$ , experience buffer of mutate actions

- 1: Sample action  $a$  editing ops / hyperparameters from  $\pi_\phi$
- 2: Fit proposed cfg; observe centered advantage  $\rho = R - R_{\text{DualCosine}} \triangleright$  objective remains maximize  $R$
- 3: Advantage  $\hat{A}$  from critic; ratio  $r_\phi = \pi_\phi(a) / \pi_{\phi_{\text{old}}}(a)$
- 4: Update  $\phi$  with clipped surrogate  $\min(r_\phi \hat{A}, \text{clip}(r_\phi, 1 - \epsilon, 1 + \epsilon) \hat{A})$
- 5: **return** updated  $\pi_\phi$

---

**Algorithm 8** PBT exploit–mutate

---

**Require:** Population  $P$ , exploit quantile  $q$ , mutate scale  $\sigma$

- 1: Rank  $P$  by  $R$ ; for each bottom member, copy hyperparameters from a top- $q$  elite
- 2: Perturb copied hyperparameters by multiplicative noise of scale  $\sigma$
- 3: Refit briefly; write back into  $P$
- 4: **return** updated  $P$

---

**Algorithm 9** HybridMetaSearch

---

**Require:** Iteration budget  $T_{\text{out}}$ , population size  $n$

- 1:  $P \leftarrow$  InitPopulation( $n$ );  $\pi \leftarrow$  ActorCritic(); champ  $\leftarrow$  null; boredom  $\leftarrow 0$
- 2: **for**  $it = 1, \dots, T_{\text{out}}$  **do**
- 3:   branch  $\leftarrow$  Rotate(ppo, ga, pbt, nas, combo)
- 4:   cfg, hp  $\leftarrow$  Propose(branch,  $P$ ,  $\pi$ )
- 5:   cell,  $R_{\text{fit}} \leftarrow$  FitCell(cfg, hp.fit\_steps)
- 6:    $R_{\text{eval}} \leftarrow$  EvalCell(cell)
- 7:    $R \leftarrow \frac{1}{2} R_{\text{fit}} + \frac{1}{2} R_{\text{eval}}$  (+ optional depth/MoE bonus)
- 8:   UpdatePopulation( $P$ , cfg,  $R$ ); PPOUpdate( $\pi$ , centered  $\rho = R - R_{\text{DualCosine}}$ )
- 9:   **if**  $R > \text{champ}.R$  **then** champ  $\leftarrow$  (cfg, cell,  $R$ ); boredom  $\leftarrow 0$
- 10:   **else** boredom  $\leftarrow$  boredom + 1
- 11:   **end if**
- 12:   **if** boredom  $\geq 1000$  **then** PlateauAdapt; boredom  $\leftarrow 0$
- 13:   **end if**
- 14: **end for**
- 15: **return** champ

---



Table 15: Search methods at a matched 5,000-evaluation budget (search seed 1902771841; historical prolonged  $R$ ). Champion  $R$  is measured against the ideal sibling;  $\Delta R$  is reported relative to DualCosine (classical fade), not Noise2Noise. Wall time is per-method CUDA time. LSTM and xLSTM indicate whether the champion graph included that block.

| Method               | $R$ @ 5k | $\Delta R$ vs DC | h     | LSTM | xLSTM |
|----------------------|----------|------------------|-------|------|-------|
| Random NAS           | 0.97816  | +0.16157         | 5.72  | no   | no    |
| Cont. CMA-ES         | 0.98468  | +0.16810         | 2.28  | no   | no    |
| Arch REINFORCE       | 0.98247  | +0.16588         | 25.93 | no   | yes   |
| Aging evolution      | 0.99079  | +0.17421         | 15.02 | no   | yes   |
| TPE Bayes NAS        | 0.98106  | +0.16448         | 11.18 | yes  | no    |
| Ours (hybrid GA-PPO) | 0.99146  | +0.17488         | 8.46  | no   | no    |

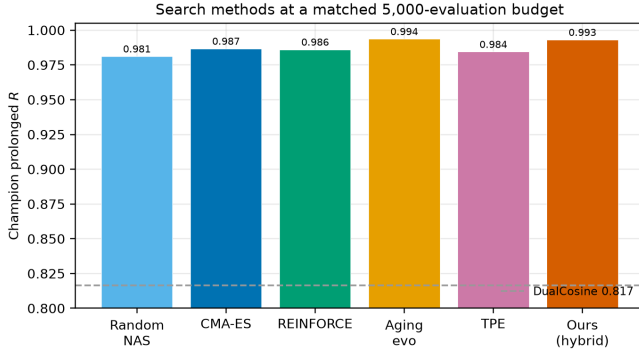


Figure 20: Matched 5,000-evaluation search methods (seed 1902771841). Champion prolonged  $R$ ; dashed line is Dual Cosine.

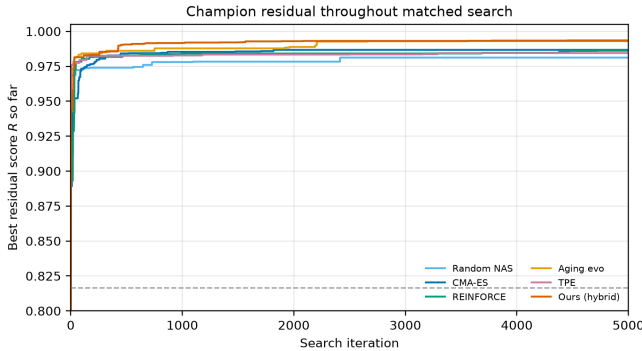


Figure 21: Champion residual  $R$  over a matched 5,000-evaluation budget. Dashed line: Dual Cosine.

Table 16: Ablations. Left: best score by branch in the recorded search run (final iteration  $\approx 6,922$ ). Right: isolated 150-iteration re-runs (seed 1902771841). Prolonged  $R$ .

| Config               | Search freeze $R$ | Isolated 150-it $R$ |
|----------------------|-------------------|---------------------|
| Full hybrid          | 0.99093           | 0.98113             |
| GA-only              | 0.99016           | 0.98062             |
| PBT (search branch)  | 0.99012           | n/a                 |
| PPO-only             | 0.98924           | 0.97932             |
| GA+PPO               | n/a               | 0.98007             |
| Combined branch      | 0.98854           | n/a                 |
| NAS branch           | 0.98677           | n/a                 |
| Dual Cosine (runner) | 0.81658           | 0.81658             |

Table 17: Compute budget for the reported 5,000-evaluation search run (RTX 3090, search seed 1902771841).

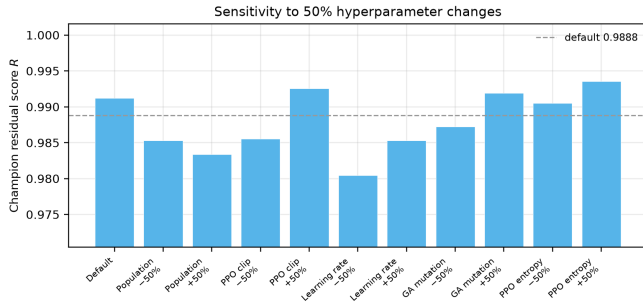
| Item                          | Value                   |
|-------------------------------|-------------------------|
| GPU                           | NVIDIA GeForce RTX 3090 |
| Elapsed wall time             | $\approx 7.92$ h        |
| Clean iterations / arch evals | $\approx 6,922$         |
| Population size               | 12                      |
| Final champion $R$            | 0.99093                 |
| Dual Cosine baseline (runner) | 0.81658                 |
| Peak VRAM (replay)            | $\approx 3.29$ GiB      |

Table 18: One-at-a-time  $\pm 50\%$  hyperparameter sensitivity probe (500 outer iterations, seed 1902771841, sine+cliff FitCell). Champion absolute  $R$  is compared with the Table 2 default. This is sensitivity evidence only, not a full 5,000-iteration re-search for each parameter.

| Parameter change         | Champ. $R$ | $\Delta R$ | Iter. |
|--------------------------|------------|------------|-------|
| Default                  | 0.98882    | +0.00000   | 500   |
| Population size $-50\%$  | 0.98136    | -0.00746   | 500   |
| Population size $+50\%$  | 0.98073    | -0.00809   | 500   |
| PPO clip $-50\%$         | 0.98159    | -0.00723   | 500   |
| PPO clip $+50\%$         | 0.99041    | +0.00159   | 500   |
| Learning rate $-50\%$    | 0.97654    | -0.01228   | 500   |
| Learning rate $+50\%$    | 0.98138    | -0.00744   | 500   |
| GA mutation rate $-50\%$ | 0.98334    | -0.00548   | 500   |
| GA mutation rate $+50\%$ | 0.99002    | +0.00120   | 500   |
| PPO entropy $-50\%$      | 0.98912    | +0.00030   | 500   |
| PPO entropy $+50\%$      | 0.99116    | +0.00234   | 500   |

Table 19: Transfer-domain inference latency (ms/batch). Batch=64; CUDA.

| Method             | CWRU | MFPT | MIT-BIH | PTB-XL | CNC  | PMU  |
|--------------------|------|------|---------|--------|------|------|
| no-bake            | 0.26 | 0.26 | 0.27    | 0.27   | 0.28 | 0.26 |
| Dual Cosine        | 1.10 | 1.11 | 1.12    | 1.14   | 1.15 | 1.14 |
| Ours (hybrid)      | 3.92 | 6.61 | 2.87    | 1.67   | 1.69 | 1.67 |
| N2N (WT to domain) | 0.95 | 0.99 | 0.98    | 0.97   | 0.98 | 0.97 |

Figure 22: One-at-a-time  $\pm 50\%$  HP sensitivity of hybrid champion  $R$  at 500 iterations. Blue bar: Table 2 default.

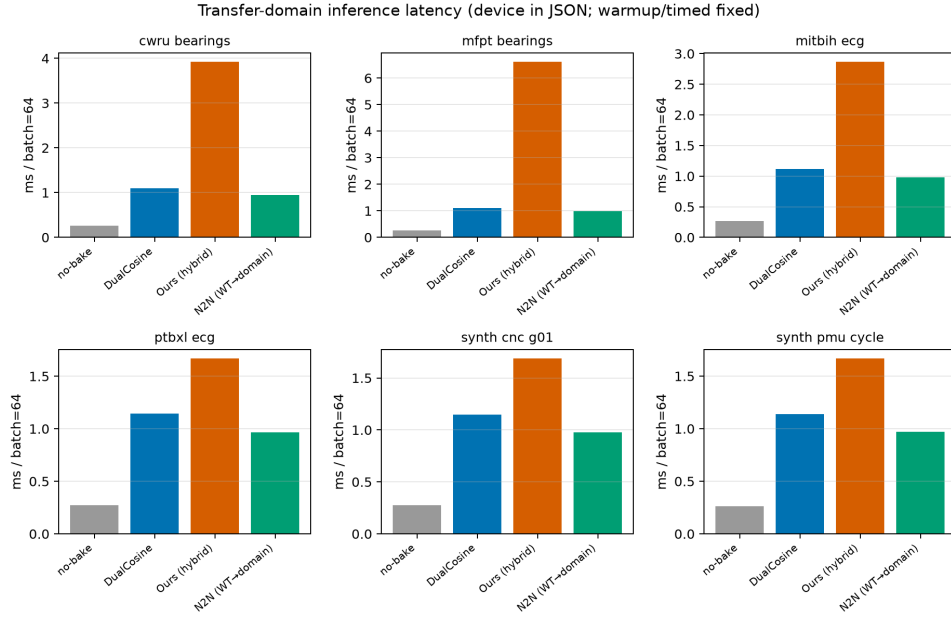


Figure 23: Transfer-domain inference latency (ms/batch). N2N is wavetable-trained zero-shot when available.

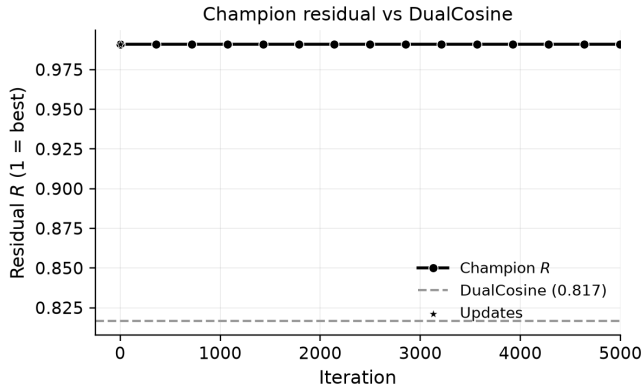


Figure 24: Champion residual  $R$  over the first 5,000 search iterations (Dual Cosine dashed).

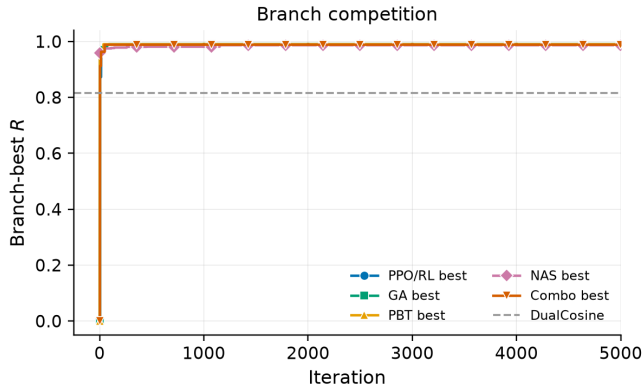


Figure 25: Best residual by search branch over the first 5,000 iterations.

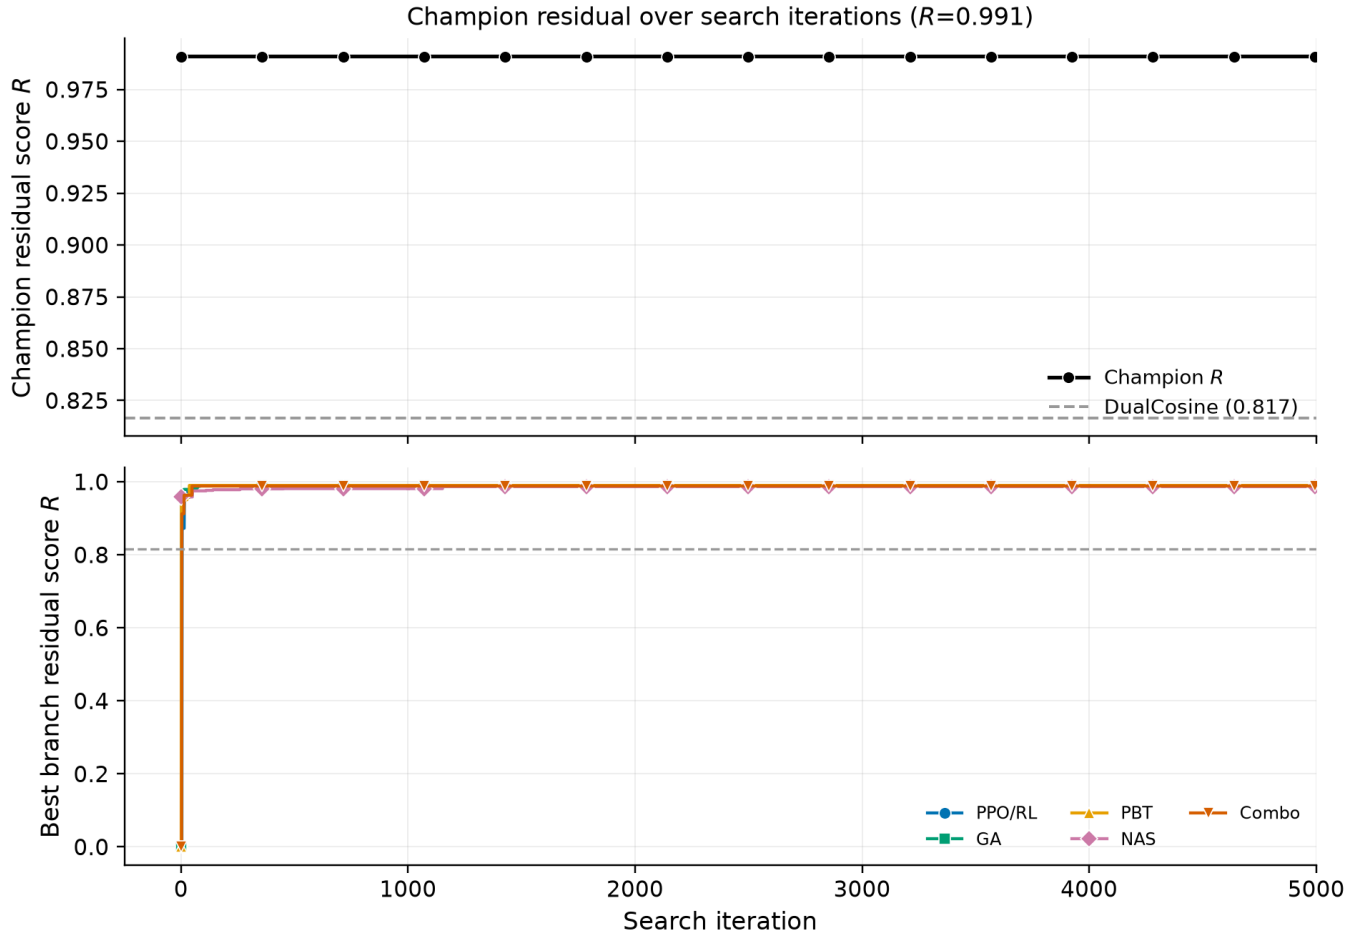
Figure 26: Search progress: champion  $R$  (top) and branch bests (bottom).

Figure 27: Per-trial residual by branch with champion trajectory overlaid.

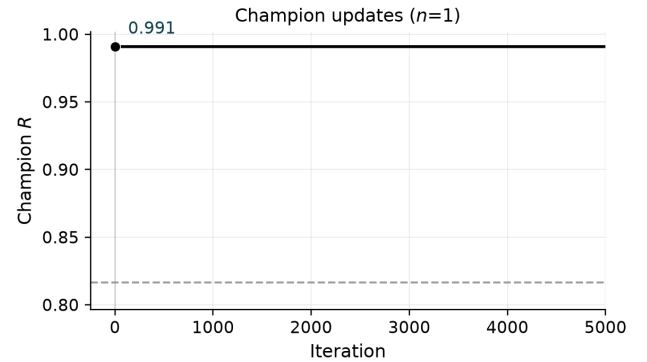


Figure 28: Champion updates over the first 5,000 iterations.



## References

- [1] T. Stilson and J. O. Smith. Alias-free digital synthesis of classic analog waveforms. In *Proc. ICMC*, 1996. <https://ccrma.stanford.edu/~stilti/papers/blit.pdf>.
- [2] F. Esqueda, V. Välimäki, and S. Bilbao. Rounding corners with BLAMP. In *Proc. DAFx*, 2016. [https://www.dafx.de/paper-archive/2016/dafxpapers/18-DAFx-16\\_paper\\_33-PN.pdf](https://www.dafx.de/paper-archive/2016/dafxpapers/18-DAFx-16_paper_33-PN.pdf).
- [3] J. Nam, V. Välimäki, J. S. Abel, and J. O. Smith. Efficient antialiasing oscillator algorithms using low-order fractional delay filters. In *Proc. DAFx*, 2009. <https://ccrma.stanford.edu/~juhan/pubs/jnam-dafx09.pdf>.
- [4] J. Lehtinen et al. Noise2Noise: Learning image restoration without clean data. In *ICML*, 2018. [arXiv:1803.04189](https://arxiv.org/abs/1803.04189).
- [5] M. M. Kashyap, A. Tambwekar, K. Manohara, and S. Natarajan. Speech denoising without clean training data: A Noise2Noise approach. In *INTERSPEECH*, 2021. [https://www.isca-archive.org/interspeech2021/kashyap21\\_interspeech.pdf](https://www.isca-archive.org/interspeech2021/kashyap21_interspeech.pdf).
- [6] J. Engel, L. Hantrakul, C. Gu, and A. Roberts. DDSF: Differentiable digital signal processing. In *ICLR*, 2020. [arXiv:2001.04643](https://arxiv.org/abs/2001.04643).
- [7] H. Purwins et al. Deep learning for audio signal processing. *IEEE J. Sel. Topics Signal Process.*, 2019. [arXiv:1905.00078](https://arxiv.org/abs/1905.00078).
- [8] D. Stoller, S. Ewert, and S. Dixon. Wave-U-Net: A multi-scale neural network for end-to-end audio source separation. In *ISMIR*, 2018. [arXiv:1806.03185](https://arxiv.org/abs/1806.03185).
- [9] C. Macartney and T. Weyde. Improved speech enhancement with the Wave-U-Net. [arXiv:1811.11307](https://arxiv.org/abs/1811.11307), 2018.
- [10] A. Jansson et al. Singing voice separation with deep U-Net convolutional networks. In *ISMIR*, 2017. <https://openaccess.city.ac.uk/id/eprint/19289/1/7bb8d1600fba70dd79408775cd0c37a4ff62.pdf>.
- [11] Y. Luo and N. Mesgarani. Conv-TasNet: Surpassing ideal time-frequency magnitude masking for speech separation. *IEEE/ACM TASLP*, 2019. [arXiv:1809.07454](https://arxiv.org/abs/1809.07454).
- [12] Y. Luo, Z. Chen, and T. Yoshioka. Dual-path RNN: Efficient long sequence modeling for time-domain speech separation. In *ICASSP*, 2020. [arXiv:1910.06379](https://arxiv.org/abs/1910.06379).
- [13] O. Ronneberger, P. Fischer, and T. Brox. U-Net: Convolutional networks for biomedical image segmentation. In *MICCAI*, 2015. [arXiv:1505.04597](https://arxiv.org/abs/1505.04597).
- [14] K. He, X. Zhang, S. Ren, and J. Sun. Deep residual learning for image recognition. In *CVPR*, 2016. [arXiv:1512.03385](https://arxiv.org/abs/1512.03385).
- [15] A. Vaswani et al. Attention is all you need. In *NeurIPS*, 2017. [arXiv:1706.03762](https://arxiv.org/abs/1706.03762).
- [16] T. Elsken, J. H. Metzen, and F. Hutter. Neural architecture search: A survey. *JMLR*, 2019. [arXiv:1808.05377](https://arxiv.org/abs/1808.05377).
- [17] B. Zoph and Q. V. Le. Neural architecture search with reinforcement learning. In *ICLR*, 2017. [arXiv:1611.01578](https://arxiv.org/abs/1611.01578).
- [18] H. Pham et al. Efficient neural architecture search via parameter sharing. In *ICML*, 2018. [arXiv:1802.03268](https://arxiv.org/abs/1802.03268).
- [19] J. Schulman et al. Proximal policy optimization algorithms. [arXiv:1707.06347](https://arxiv.org/abs/1707.06347), 2017.
- [20] E. Real et al. Large-scale evolution of image classifiers. In *ICML*, 2017. [arXiv:1703.01041](https://arxiv.org/abs/1703.01041).
- [21] E. Real, A. Aggarwal, Y. Huang, and Q. V. Le. Regularized evolution for image classifier architecture search. In *AAAI*, 2019. [arXiv:1802.01548](https://arxiv.org/abs/1802.01548).
- [22] M. Jaderberg et al. Population based training of neural networks. [arXiv:1711.09846](https://arxiv.org/abs/1711.09846), 2017.
- [23] S. Khadka and K. Tumer. Evolution-guided policy gradient in reinforcement learning. In *NeurIPS*, 2018. [arXiv:1805.07917](https://arxiv.org/abs/1805.07917).
- [24] N. Hansen. The CMA evolution strategy: A tutorial. [arXiv:1604.00772](https://arxiv.org/abs/1604.00772), 2016.
- [25] N. Shazeer et al. Outrageously large neural networks: The sparsely-gated mixture-of-experts layer. In *ICLR*, 2017. [arXiv:1701.06538](https://arxiv.org/abs/1701.06538).
- [26] J. Snoek, H. Larochelle, and R. P. Adams. Practical Bayesian optimization of machine learning algorithms. In *NeurIPS*, 2012. [arXiv:1206.2944](https://arxiv.org/abs/1206.2944).
- [27] M. Tan et al. MnasNet: Platform-aware neural architecture search for mobile. In *CVPR*, 2019. [arXiv:1807.11626](https://arxiv.org/abs/1807.11626).
- [28] C. Liu et al. Progressive neural architecture search. In *ECCV*, 2018. [arXiv:1712.00559](https://arxiv.org/abs/1712.00559).
- [29] S. Wisdom et al. Unsupervised sound separation using mixture invariant training. In *NeurIPS*, 2020. [arXiv:2006.12701](https://arxiv.org/abs/2006.12701).
- [30] C. Subakan, M. Ravanelli, S. Cornell, M. Bronzi, and J. Zhong. Attention is all you need in speech separation. In *ICASSP*, 2021. [arXiv:2010.13154](https://arxiv.org/abs/2010.13154).
- [31] Y. Gong, Y.-A. Chung, and J. Glass. AST: Audio spectrogram transformer. In *INTERSPEECH*, 2021. [arXiv:2104.01778](https://arxiv.org/abs/2104.01778).
- [32] C. Finn, P. Abbeel, and S. Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In *ICML*, 2017. [arXiv:1703.03400](https://arxiv.org/abs/1703.03400). (Screened.)
- [33] H. Liu, K. Simonyan, and Y. Yang. DARTS: Differentiable architecture search. In *ICLR*, 2019. [arXiv:1806.09055](https://arxiv.org/abs/1806.09055). (Screened.)
- [34] A. Défossez et al. Demucs: Deep extractor for music sources. [arXiv:1911.13254](https://arxiv.org/abs/1911.13254), 2019. (Screened.)
- [35] A. Défossez, G. Synnaeve, and Y. Adi. Real time speech enhancement in the waveform domain. In *INTERSPEECH*, 2020. (Screened.) [arXiv:2006.12847](https://arxiv.org/abs/2006.12847).
- [36] A. Défossez. Hybrid spectrogram and waveform source separation. [arXiv:2111.03600](https://arxiv.org/abs/2111.03600), 2021. (Screened.)
- [37] Z. Kong et al. DiffWave: A versatile diffusion model for audio synthesis. In *ICLR*, 2021. [arXiv:2009.00713](https://arxiv.org/abs/2009.00713). (Screened.)
- [38] S. Pascual, A. Bonafonte, and J. Serrà. SEGAN: Speech enhancement generative adversarial network. In *INTERSPEECH*, 2017. (Screened.) [arXiv:1703.09452](https://arxiv.org/abs/1703.09452).