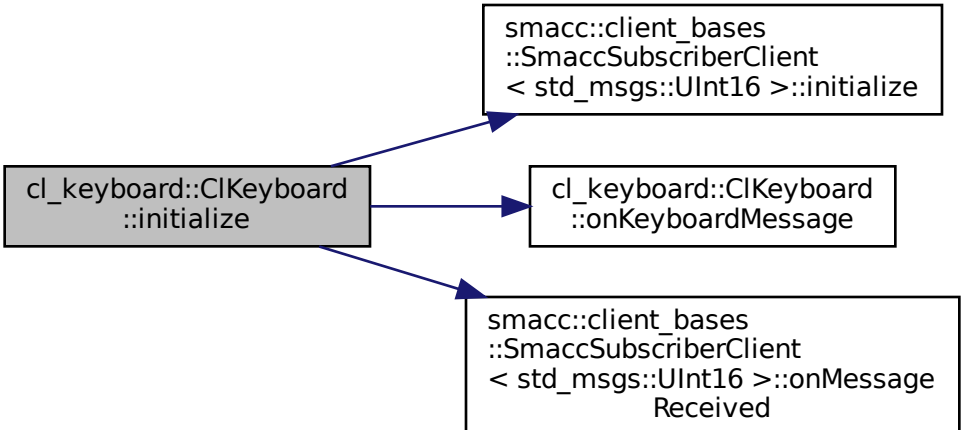
cl_keyboard::ClKeyboard
::initialize
smacc::client_bases
::SmaccSubscriberClient
< std_msgs::UInt16 >::initialize
cl_keyboard::ClKeyboard
::onKeyboardMessage
smacc::client_bases
::SmaccSubscriberClient
< std_msgs::UInt16 >::onMessage
Received