


sm\_fetch\_six\_table  
\_pick\_n\_sort\_1::pick  
\_states::StGraspRetreat  
::runtimeConfigure

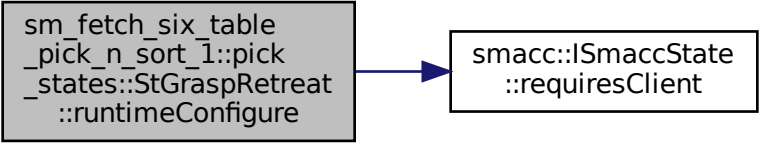

```
graph LR; A["sm_fetch_six_table  
_pick_n_sort_1::pick  
_states::StGraspRetreat  
::runtimeConfigure"] --> B["smacc::ISmaccState  
::requiresClient"]
```

A diagram showing a dependency. On the left, a gray rectangular box contains the text: `sm_fetch_six_table`, `_pick_n_sort_1::pick`, `_states::StGraspRetreat`, and `::runtimeConfigure`. A blue arrow points from the right side of this box to the left side of a white rectangular box on the right. The white box contains the text: `smacc::ISmaccState` and `::requiresClient`.

smacc::ISmaccState  
::requiresClient