


```
smacc::client_bases  
::SmaccSubscriberClient  
::initialize
```

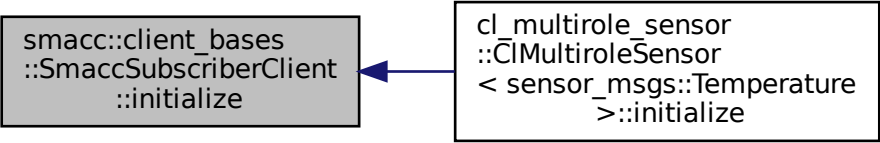

```
graph LR; A["cl_multirole_sensor  
::CIMultiroleSensor  
< sensor_msgs::Temperature  
>::initialize"] --> B["smacc::client_bases  
::SmaccSubscriberClient  
::initialize"]
```

The diagram illustrates a function call. On the right, a white box contains the code for `cl_multirole_sensor::CIMultiroleSensor` calling `< sensor_msgs::Temperature >::initialize`. A blue arrow points from this box to a gray box on the left, which contains the definition of `smacc::client_bases::SmaccSubscriberClient::initialize`.

```
cl_multirole_sensor  
::CIMultiroleSensor  
< sensor_msgs::Temperature  
>::initialize
```