


boost::statechart::
event< EvWaypoint192
< TSource, TOrthogonal > >

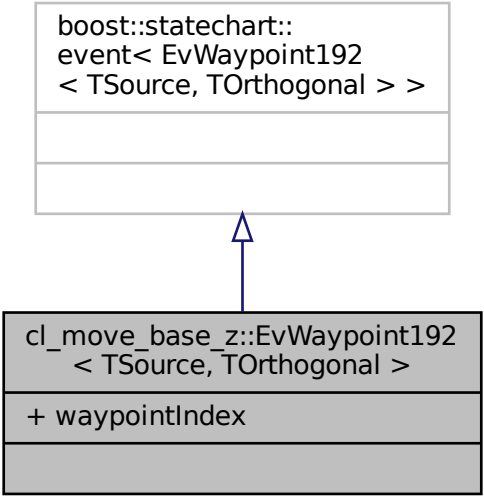

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvWaypoint192< TSource, TOrthogonal > >"]
    class cl_move_base_z_EvWaypoint192["cl_move_base_z::EvWaypoint192< TSource, TOrthogonal >"]
    cl_move_base_z_EvWaypoint192 --|> boost_statechart_event
```

The diagram shows a class hierarchy. The base class is `boost::statechart::event< EvWaypoint192 < TSource, TOrthogonal > >`, represented in a white box. The derived class is `cl_move_base_z::EvWaypoint192 < TSource, TOrthogonal >`, represented in a grey box. A blue arrow with an open triangular head points from the derived class to the base class. The derived class has a public attribute `+ waypointIndex`.

cl_move_base_z::EvWaypoint192
< TSource, TOrthogonal >

+ waypointIndex