


```
smacc::client_bases  
::SmaccSubscriberClient  
::initialize
```

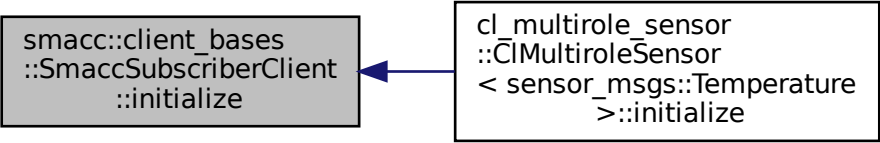

```
graph LR; A["cl_multirole_sensor  
::CIMultiroleSensor  
< sensor_msgs::Temperature  
>::initialize"] --> B["smacc::client_bases  
::SmaccSubscriberClient  
::initialize"]
```

A diagram showing a call from a sensor class to a client base class. On the right, a box contains the code: `cl_multirole_sensor`, `::CIMultiroleSensor`, `< sensor_msgs::Temperature`, and `>::initialize`. A blue arrow points from this box to a box on the left. The left box has a gray background and contains the code: `smacc::client_bases`, `::SmaccSubscriberClient`, and `::initialize`.

```
cl_multirole_sensor  
::CIMultiroleSensor  
< sensor_msgs::Temperature  
>::initialize
```