


smacc\_sm\_reference  
\_library/sm\_ferrari  
/include/sm\_ferrari/mode  
\_states/ms\_run.h

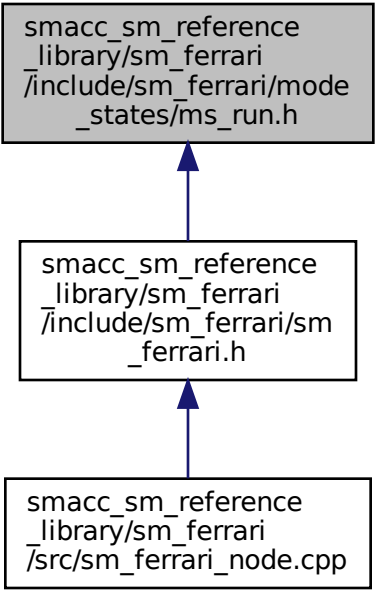

```
graph BT; A["smacc_sm_reference_library/sm_ferrari/src/sm_ferrari_node.cpp"] --> B["smacc_sm_reference_library/sm_ferrari/include/sm_ferrari/sm_ferrari.h"]; B --> C["smacc_sm_reference_library/sm_ferrari/include/sm_ferrari/mode_states/ms_run.h"];
```

smacc\_sm\_reference  
\_library/sm\_ferrari  
/include/sm\_ferrari/sm  
\_ferrari.h

smacc\_sm\_reference  
\_library/sm\_ferrari  
/src/sm\_ferrari\_node.cpp