


boost::statechart::  
event< EvWaypoint133  
< TSource, TOrthogonal > >

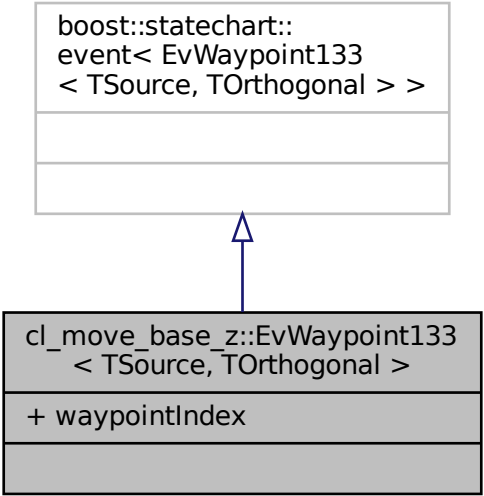

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvWaypoint133< TSource, TOrthogonal > >"]
    class cl_move_base_z_EvWaypoint133["cl_move_base_z::EvWaypoint133< TSource, TOrthogonal >"]
    cl_move_base_z_EvWaypoint133 --|> boost_statechart_event
```

The diagram shows a class hierarchy. The base class is `boost::statechart::event< EvWaypoint133 < TSource, TOrthogonal > >`, represented by a white box with a thin black border. The derived class is `cl_move_base_z::EvWaypoint133 < TSource, TOrthogonal >`, represented by a grey box with a thick black border. A blue arrow with an open triangular head points from the derived class to the base class. The derived class has a public attribute `+ waypointIndex` in its second compartment.

cl\_move\_base\_z::EvWaypoint133  
< TSource, TOrthogonal >

+ waypointIndex