


```
sm_fetch_two_table  
_whiskey_pour::recovery  
_screw::StRecoveryScrewThird  
::runtimeConfigure
```

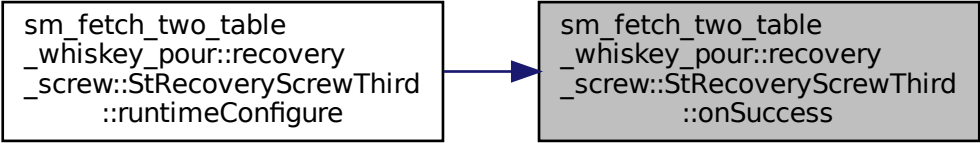

A diagram showing a transition from a configuration state to an execution state. On the left, a white box contains the text 'sm_fetch_two_table', '_whiskey_pour::recovery', '_screw::StRecoveryScrewThird', and '::runtimeConfigure'. A blue arrow points from this box to a gray box on the right. The gray box contains the text 'sm_fetch_two_table', '_whiskey_pour::recovery', '_screw::StRecoveryScrewThird', and '::onSuccess'.

```
sm_fetch_two_table  
_whiskey_pour::recovery  
_screw::StRecoveryScrewThird  
::onSuccess
```