


sm\_ridgeback\_floor  
\_coverage\_dynamic\_1  
::OrNavigation::loadWaypoints  
FromYaml

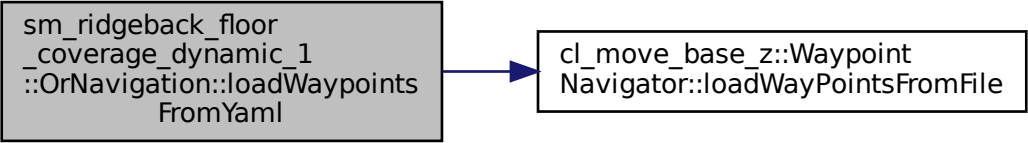

```
graph LR; A["sm_ridgeback_floor  
_coverage_dynamic_1  
::OrNavigation::loadWaypoints  
FromYaml"] --> B["cl_move_base_z::Waypoint  
Navigator::loadWayPointsFromFile"]
```

A diagram showing a call from a state machine to a class method. On the left, a gray box contains the text 'sm\_ridgeback\_floor', '\_coverage\_dynamic\_1', and '::OrNavigation::loadWaypoints FromYaml'. A blue arrow points from this box to a white box on the right. The white box contains the text 'cl\_move\_base\_z::Waypoint' and 'Navigator::loadWayPointsFromFile'.

cl\_move\_base\_z::Waypoint  
Navigator::loadWayPointsFromFile