


boost::statechart::
event< EvWaypoint129
< TSource, TOrthogonal > >

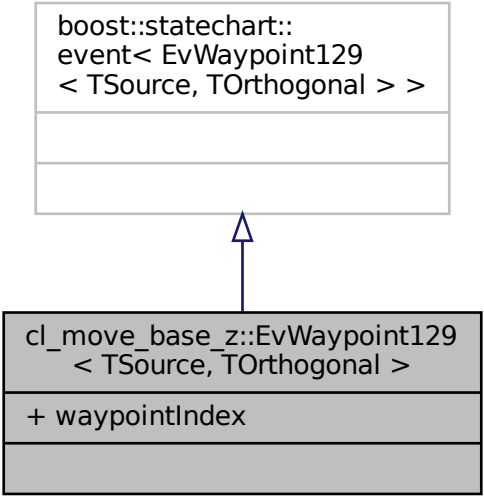

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvWaypoint129< TSource, TOrthogonal > >"]
    class cl_move_base_z_EvWaypoint129["cl_move_base_z::EvWaypoint129< TSource, TOrthogonal >"]
    cl_move_base_z_EvWaypoint129 --|> boost_statechart_event
```

The diagram shows two class boxes. The top box is white and represents the base class `boost::statechart::event< EvWaypoint129 < TSource, TOrthogonal > >`. The bottom box is gray and represents the derived class `cl_move_base_z::EvWaypoint129 < TSource, TOrthogonal >`. A blue arrow with an open triangular head points from the bottom box to the top box, indicating inheritance. The bottom box has a second compartment containing the attribute `+ waypointIndex`.

cl_move_base_z::EvWaypoint129
< TSource, TOrthogonal >

+ waypointIndex