


boost::statechart::  
event< EvWaypoint110  
< TSource, TOrthogonal > >

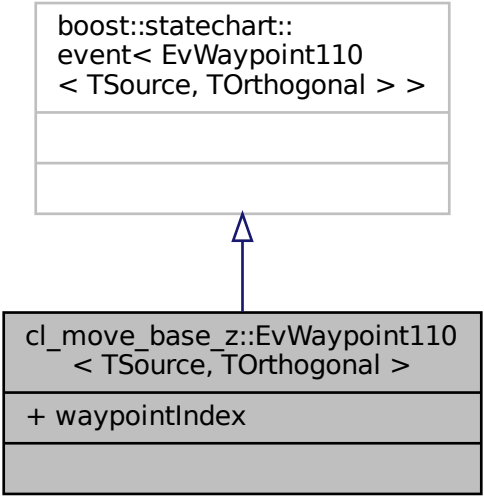

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvWaypoint110< TSource, TOrthogonal > >"]
    class cl_move_base_z_EvWaypoint110["cl_move_base_z::EvWaypoint110< TSource, TOrthogonal >"]
    cl_move_base_z_EvWaypoint110 --|> boost_statechart_event
```

The diagram illustrates an inheritance relationship. The base class, `boost::statechart::event< EvWaypoint110 < TSource, TOrthogonal > >`, is shown in a white box with a thin grey border. It has two empty compartments below the header. The derived class, `cl_move_base_z::EvWaypoint110 < TSource, TOrthogonal >`, is shown in a grey box with a thick black border. It has a header compartment, a compartment containing the public attribute `+ waypointIndex`, and an empty bottom compartment. A blue arrow with a hollow triangular head points from the top of the derived class box to the bottom of the base class box.

cl\_move\_base\_z::EvWaypoint110  
< TSource, TOrthogonal >

+ waypointIndex