


```
sm_fetch_two_table  
_whiskey_pour::recovery  
_screw::StRecoveryScrewThird  
::runtimeConfigure
```

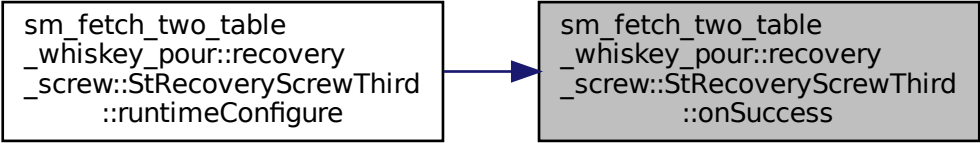

A diagram showing a transition from a configuration state to an execution state. On the left, a white box contains the code for setting up a recovery process. A blue arrow points from this box to a gray box on the right, which contains the code for the recovery process's success callback.

```
sm_fetch_two_table  
_whiskey_pour::recovery  
_screw::StRecoveryScrewThird  
::onSuccess
```