


```
move_base_z_client  
::backward_local_planner  
::BackwardLocalPlanner  
  ::initialize
```

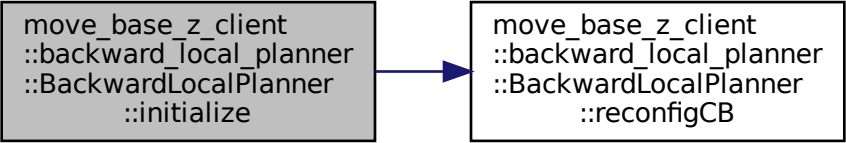

A diagram showing a transition between two states. On the left, a gray rectangular box contains the text: `move_base_z_client`, `::backward_local_planner`, `::BackwardLocalPlanner`, and `::initialize`. A blue arrow points from the right side of this box to the left side of a white rectangular box on the right. The white box contains the text: `move_base_z_client`, `::backward_local_planner`, `::BackwardLocalPlanner`, and `::reconfigCB`.

```
move_base_z_client  
::backward_local_planner  
::BackwardLocalPlanner  
  ::reconfigCB
```