


```
move_base_z_client  
::ClMoveBaseZ::initialize
```

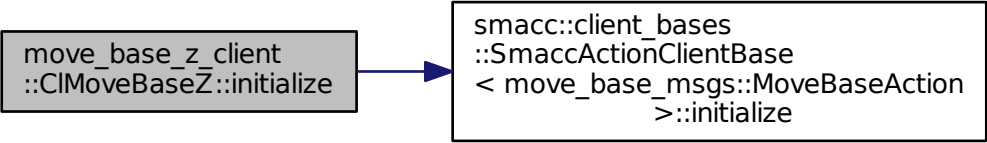

```
graph LR; A[move_base_z_client::ClMoveBaseZ::initialize] --> B[smacc::client_bases::SmaccActionClientBase<move_base_msgs::MoveBaseAction>::initialize];
```

A diagram showing a call from a client to a base class. On the left, a gray box contains the text 'move\_base\_z\_client::ClMoveBaseZ::initialize'. A blue arrow points from this box to a white box on the right. The white box contains the text 'smacc::client\_bases::SmaccActionClientBase<move\_base\_msgs::MoveBaseAction>::initialize'.

```
smacc::client_bases  
::SmaccActionClientBase  
< move_base_msgs::MoveBaseAction  
    >::initialize
```