


boost::statechart::  
event< EvWaypoint109  
< TSource, TOrthogonal > >

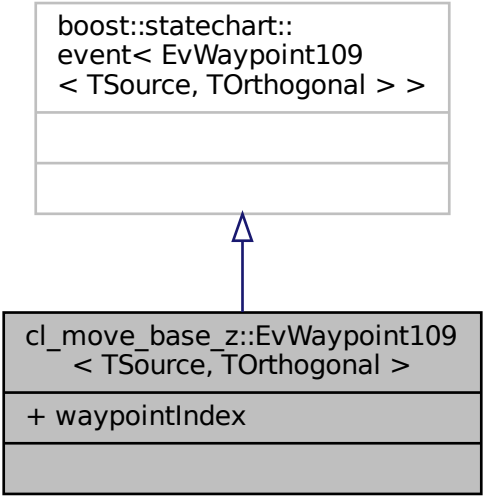

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvWaypoint109< TSource, TOrthogonal > >"]
    class cl_move_base_z_EvWaypoint109["cl_move_base_z::EvWaypoint109< TSource, TOrthogonal >"]
    cl_move_base_z_EvWaypoint109 --|> boost_statechart_event
```

The diagram shows a class hierarchy. The base class is `boost::statechart::event< EvWaypoint109 < TSource, TOrthogonal > >`. The derived class is `cl_move_base_z::EvWaypoint109 < TSource, TOrthogonal >`. The derived class has a public attribute `+ waypointIndex`.

cl\_move\_base\_z::EvWaypoint109  
< TSource, TOrthogonal >

+ waypointIndex