


boost::statechart::
event< EvWaypoint111
< TSource, TOrthogonal > >

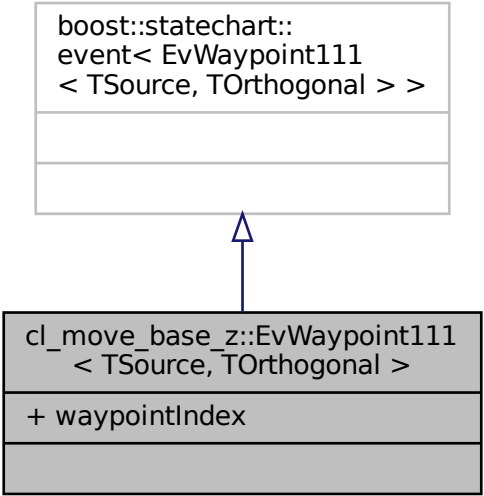

```
classDiagram
    class boost_statechart_event["boost::statechart::event< EvWaypoint111< TSource, TOrthogonal > >"]
    class cl_move_base_z_EvWaypoint111["cl_move_base_z::EvWaypoint111< TSource, TOrthogonal >"]
    cl_move_base_z_EvWaypoint111 --|> boost_statechart_event
```

The diagram illustrates an inheritance relationship. At the top is a base class box for `boost::statechart::event< EvWaypoint111 < TSource, TOrthogonal > >`. Below it is a derived class box for `cl_move_base_z::EvWaypoint111 < TSource, TOrthogonal >`. A blue arrow with an open triangular head points from the derived class to the base class. The derived class box has three sections: the top section contains the class name, the middle section contains the public attribute `+ waypointIndex`, and the bottom section is empty.

cl_move_base_z::EvWaypoint111
< TSource, TOrthogonal >

+ waypointIndex