

# CSCI 466: Networks

Lecture 3: OSI Model, Packet Forwarding

Reese Pearsall  
Fall 2023

# Announcements


- TA: **Shahnaj Mou**
  - Office Hours: Mondays 3:10 – 4:10 and 5:10 – 6:00 PM  
in Barnard Hall 259
  - Email: shahnajmou@gmail.com
- Groups + Partners

# Questionnaire Stuff

How comfortable are you with Python?

78 responses


Copy

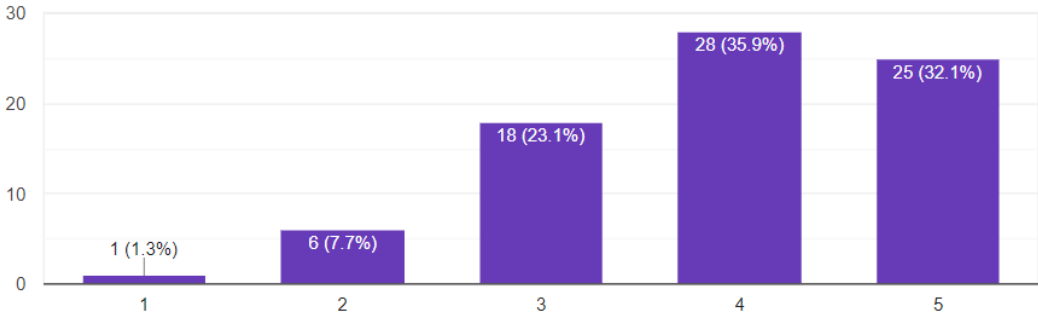

How comfortable are you with Git/Github

78 responses


Copy

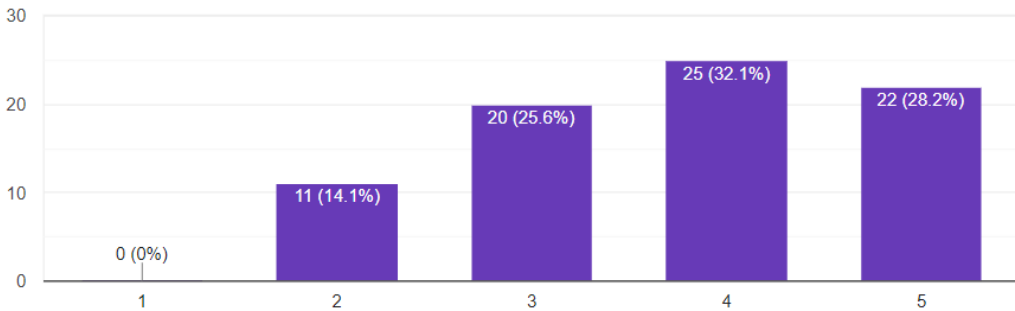


It makes my life much less stressful knowing people have used Git ☺

Have you taken CSCI 476- Computer Security?

78 responses



● Yes  
● No  
● I am currently enrolled in it!



● Freshman  
● Sophomore  
● Junior  
● Senior  
● Graduate Student  
● High School Student  
● Other

“This seems relevant for my career”  
“I hate group projects”,  
“I am a hardcore procrastinator”

Work

Presentation


Solo





Group



# Questionnaire Stuff

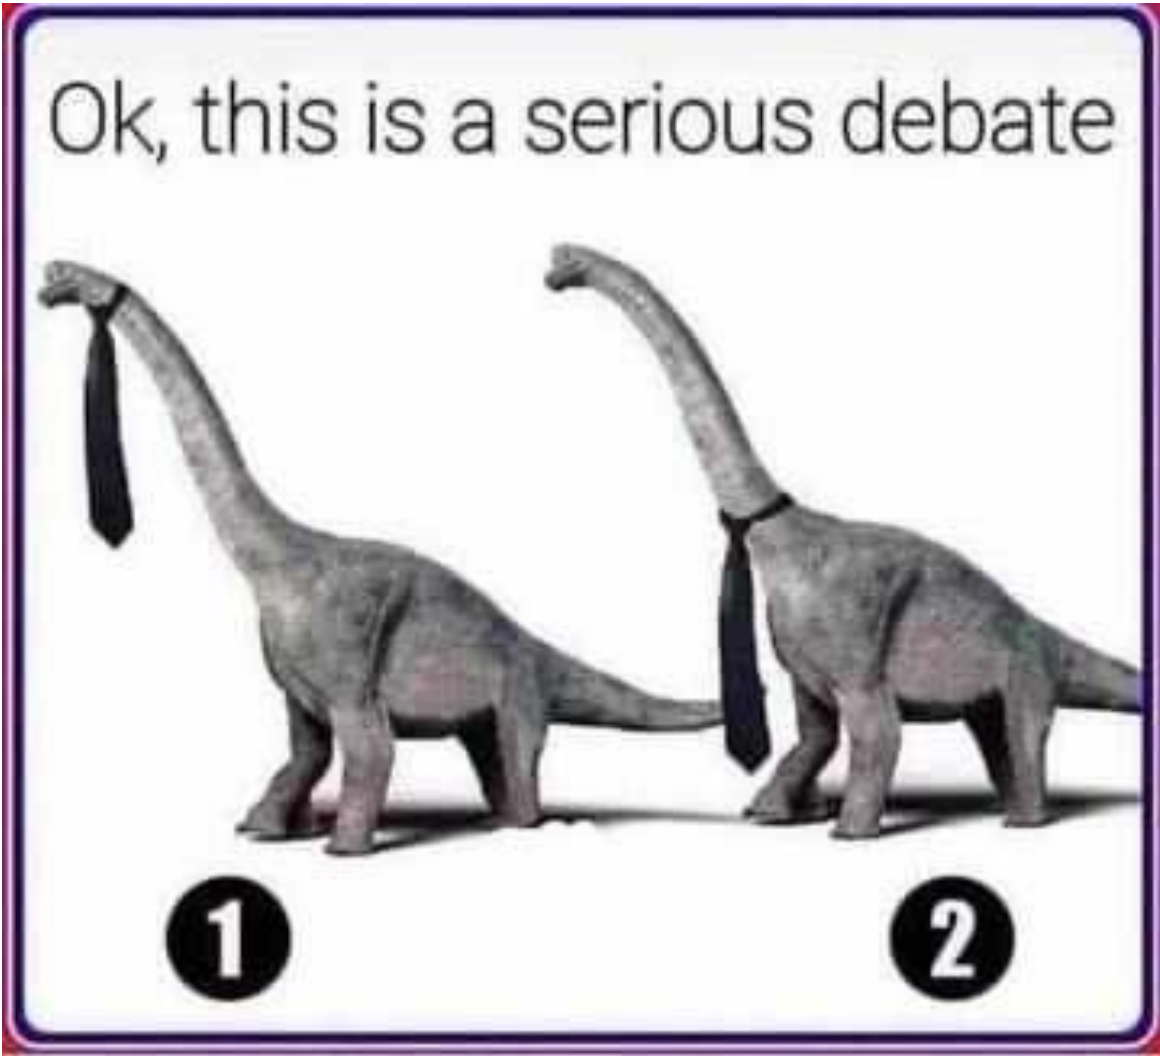

# Questionnaire Stuff

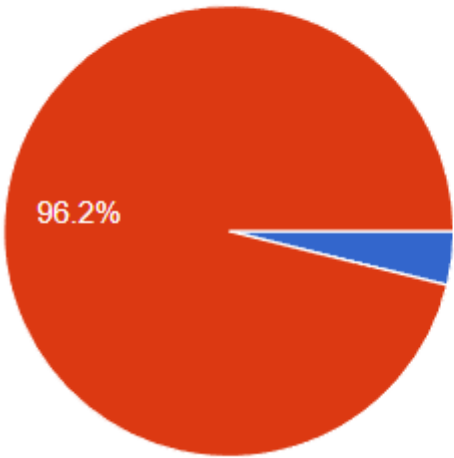
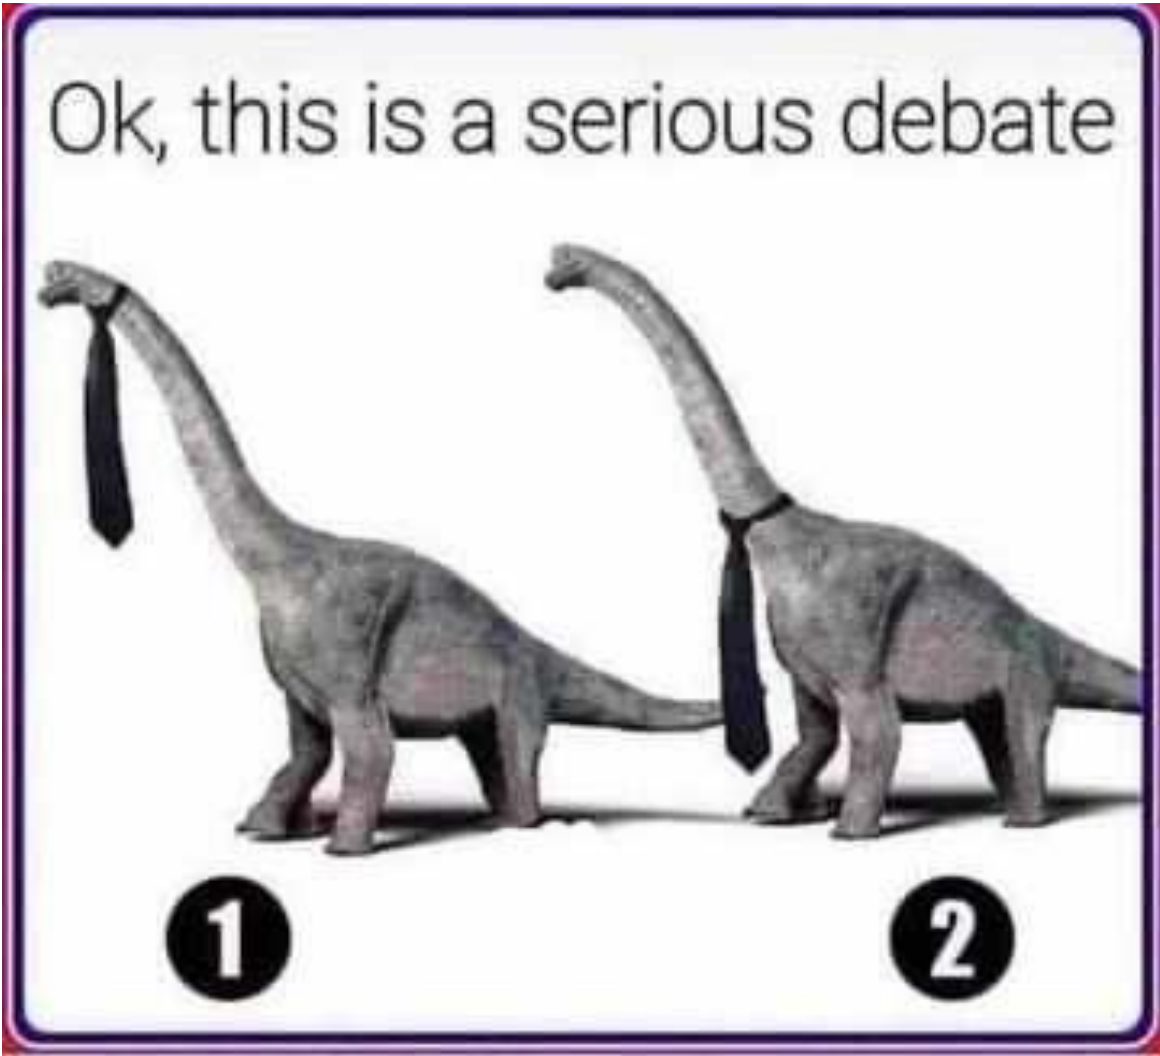


● 1  
● 2



# Submarine Cables

Submarine cables are set on the floors of the ocean

<https://www.youtube.com/watch?v=d0gs497KApU>

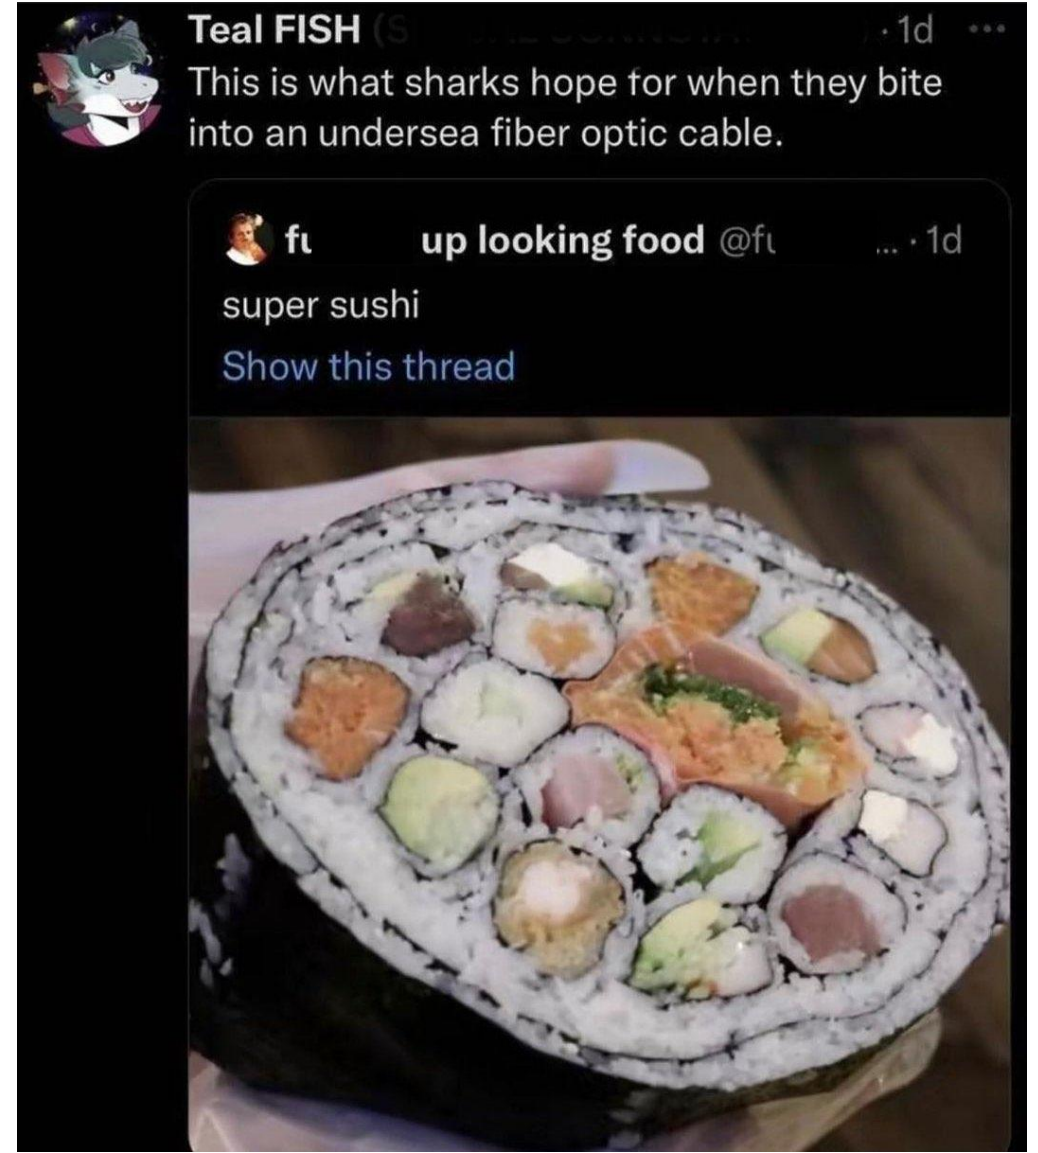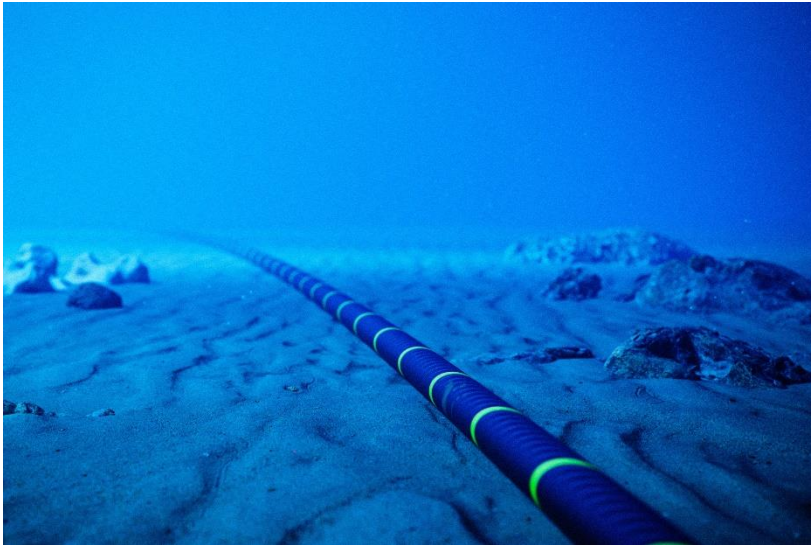


# OSI Model

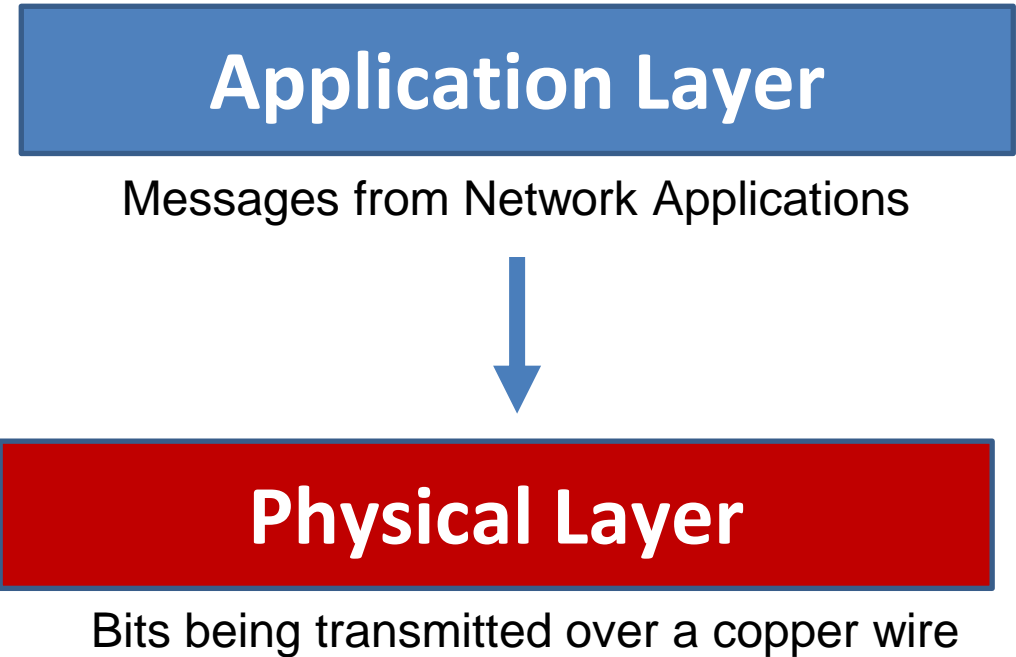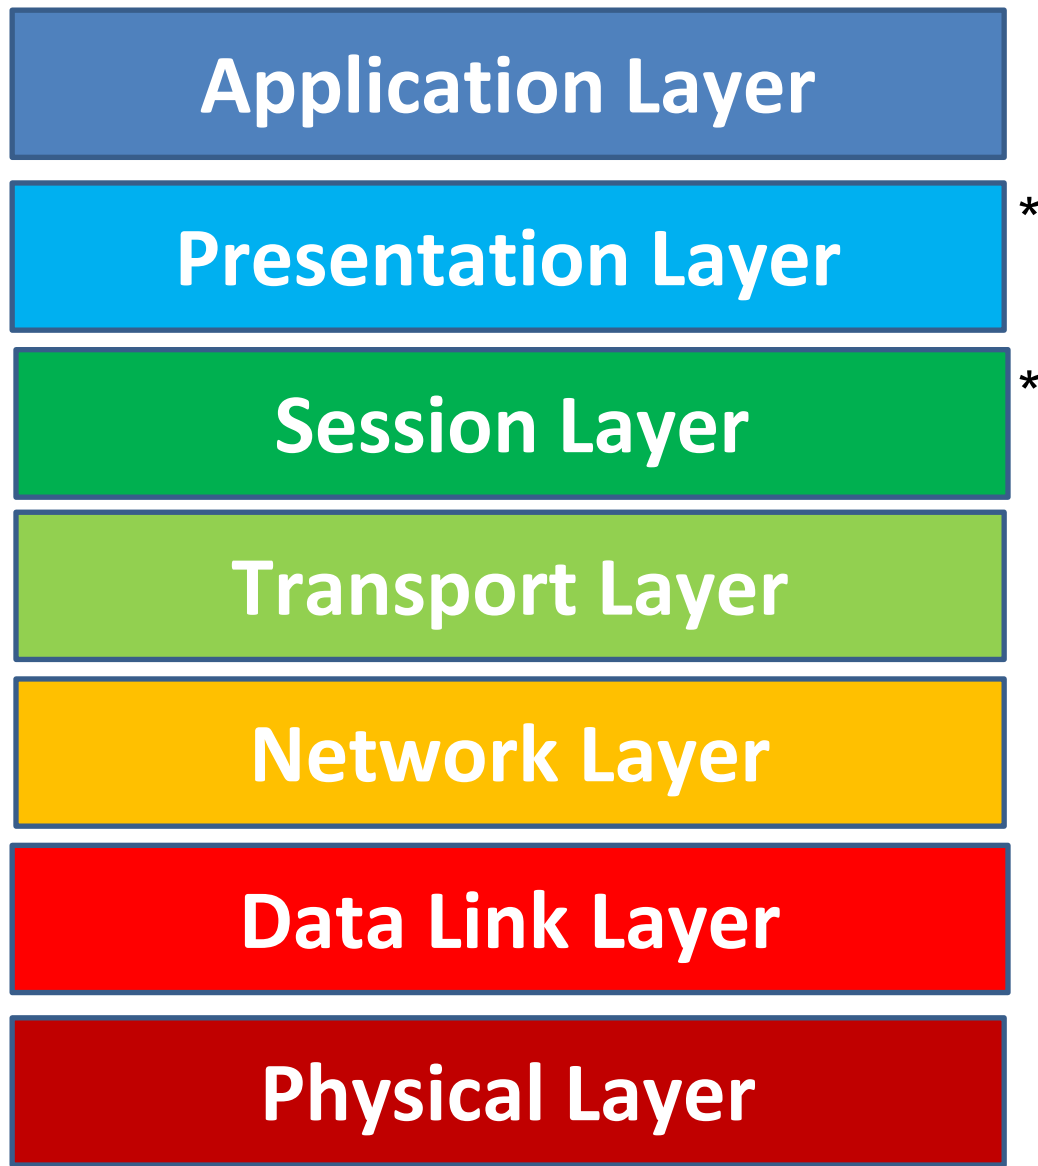



*\*In the textbook, they condense it to a 5-layer model, but 7 layers is what is most used*

# What is a protocol?


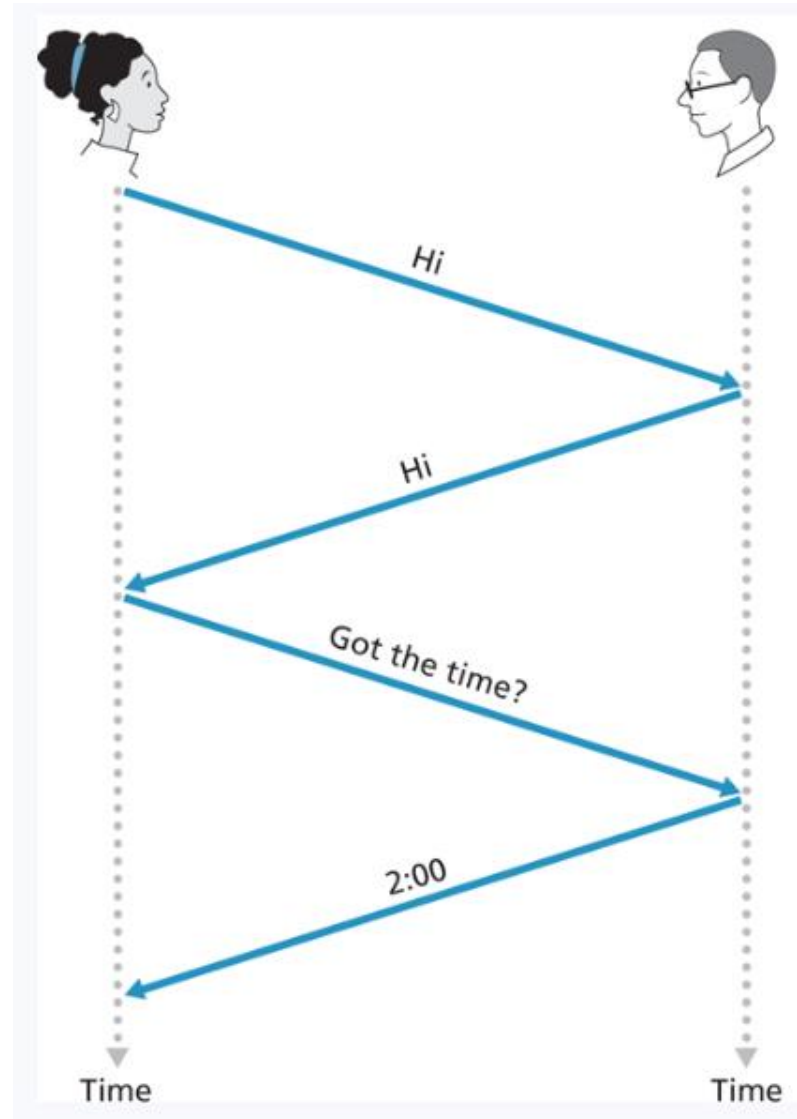




# What is a protocol?

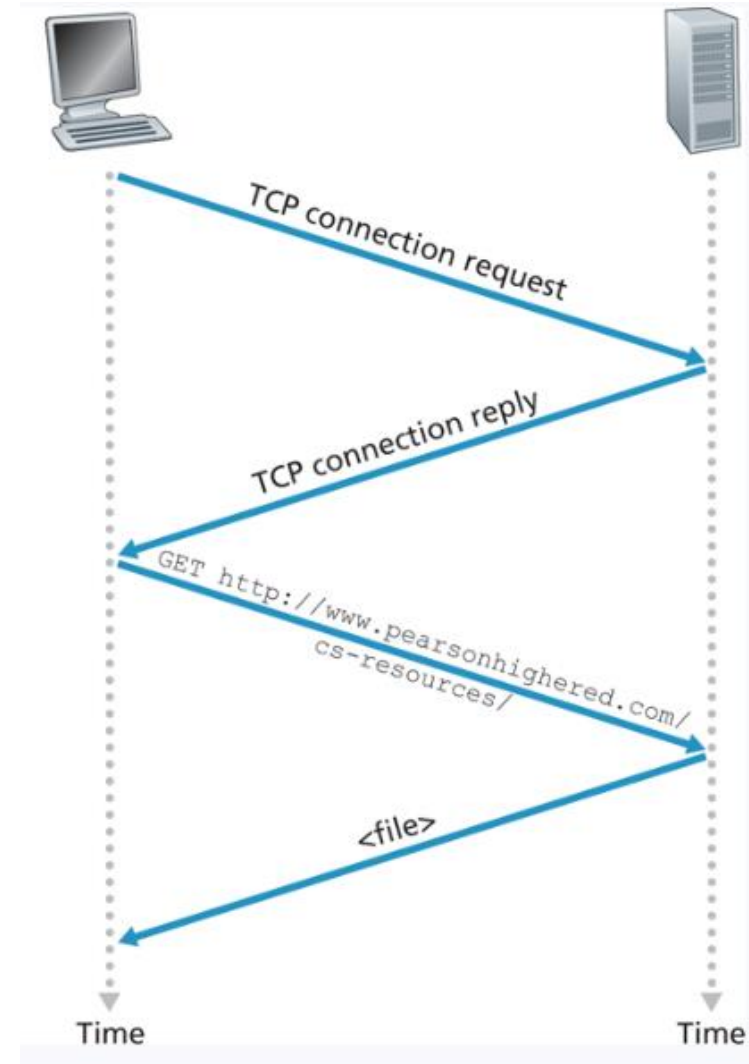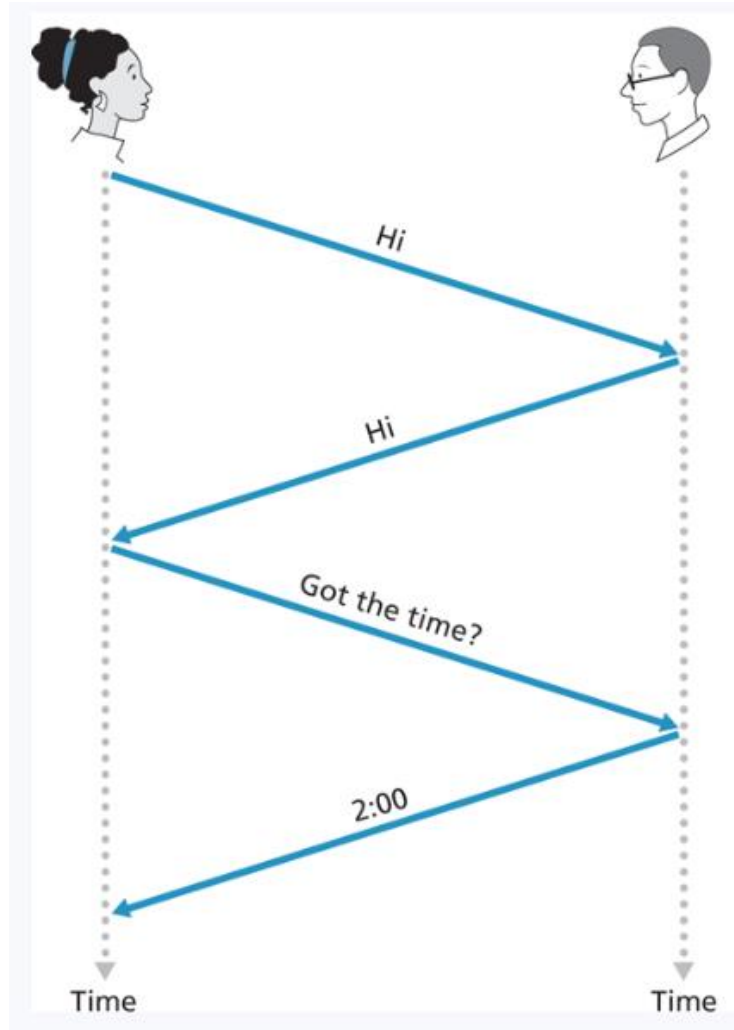

# What is a protocol?

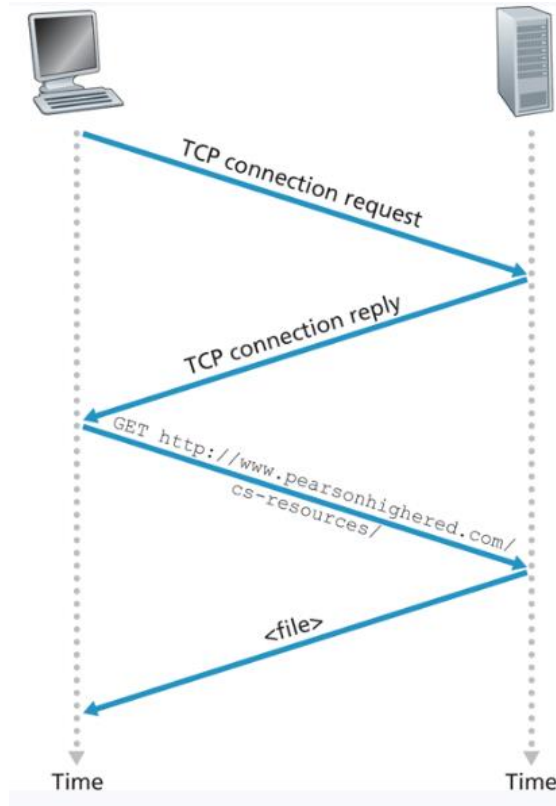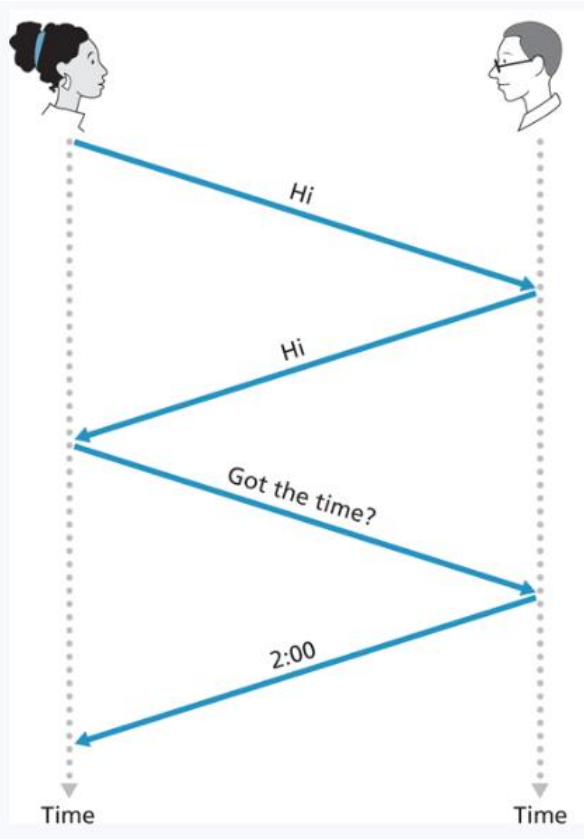

A **protocol** defines the format and the order of messages exchanges between two or more communicating entities, as well as the actions taken on the transmission and/or receipt of the message or event

# Application Layer

The layer which interacts directly with applications and provides necessary protocols and services for web applications

Humans interact with this layer

Data from user → Application Layer → Sent to next layer down

# Application Layer

The layer which interacts directly with applications and provides necessary protocols and services for web applications

Humans interact with this layer

Data from user → Application Layer → Sent to next layer down

Search query on website →

```
GET /index.html HTTP/1.1
Host: www.example.com
User-Agent: Mozilla/5.0
Accept: text/html
Accept-Language: en-US,en;q=0.5
Accept-Encoding: gzip, deflate
Connection: keep-alive
```

→ Sent to presentation layer

# Application Layer

The layer which interacts directly with applications and provides necessary protocols and services for web applications

Humans interact with this layer

Data from user → Application Layer → Sent to next layer down

Search query on website →

```
GET /index.html HTTP/1.1
Host: www.example.com
User-Agent: Mozilla/5.0
Accept: text/html
Accept-Language: en-US,en;q=0.5
Accept-Encoding: gzip, deflate
Connection: keep-alive
```


→ Sent to presentation layer

## OSI Model

Protocol defines the steps of getting data from application to application



- 1 FTP Client opens command channel to server; tells server second port number to use
- 2 FTP Server acknowledges
- 3 FTP Server opens data channel to clients second port as instructed
- 4 Client acknowledges and data flows

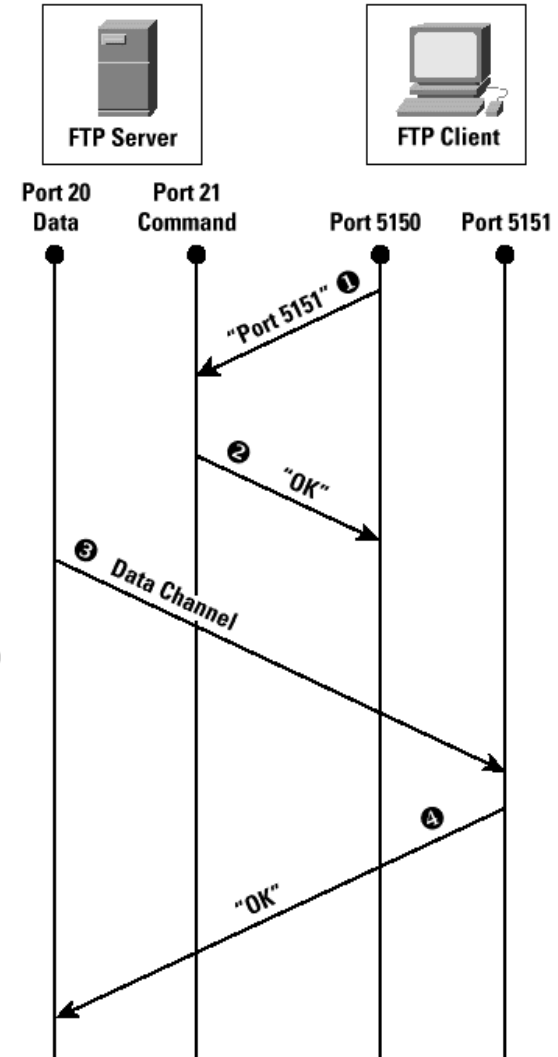

# Application Layer

The layer which interacts directly with applications and provides necessary protocols and services for web applications

Humans interact with this layer

Data from user → Application Layer → Sent to next layer down


Search query on website →

```
GET /index.html HTTP/1.1
Host: www.example.com
User-Agent: Mozilla/5.0
Accept: text/html
Accept-Language: en-US,en;q=0.5
Accept-Encoding: gzip, deflate
Connection: keep-alive
```

→ Sent to presentation layer

## OSI Model

Protocol defines the steps of getting data from application to application

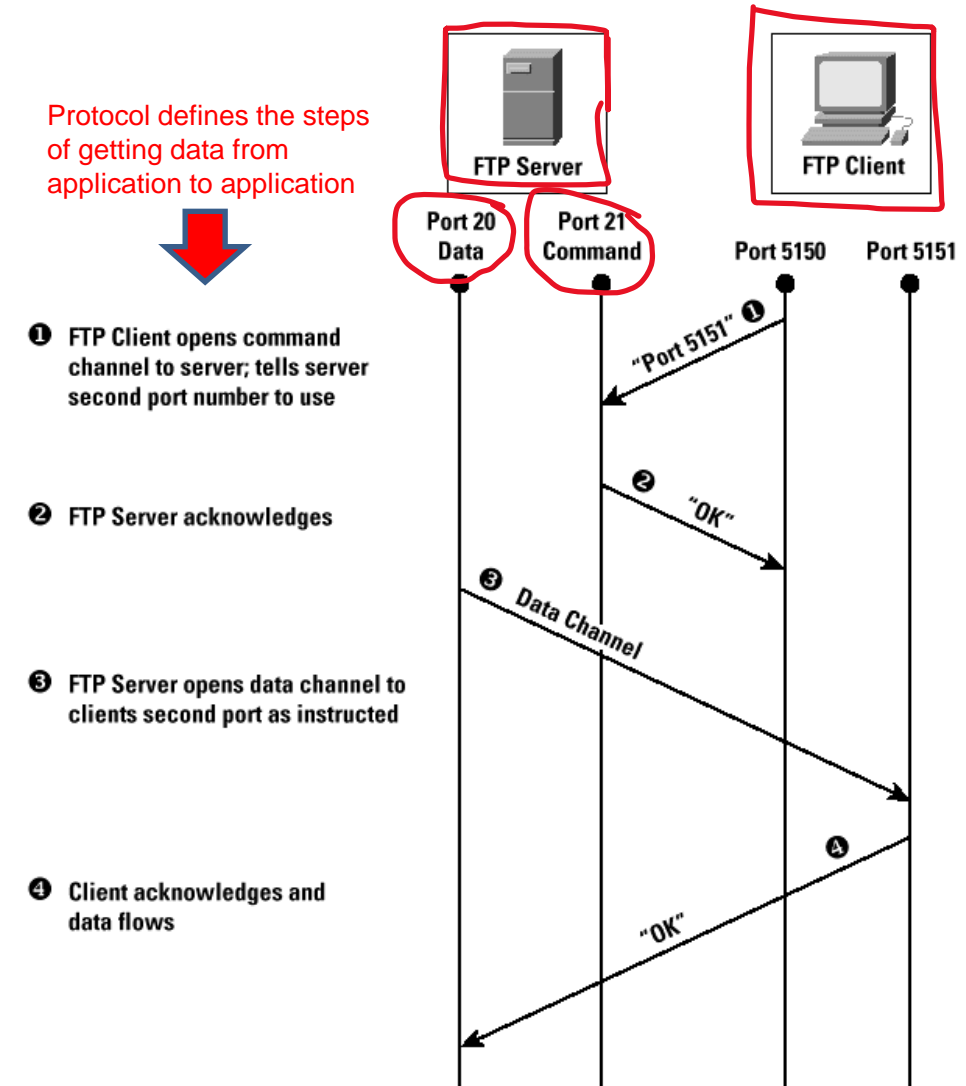


# Presentation Layer

The layer which allows applications to interpret meaning of data


## Translation

Text encoding → Encoding, Ascii  
Bit/Byte order  
File Syntax

## Encryption

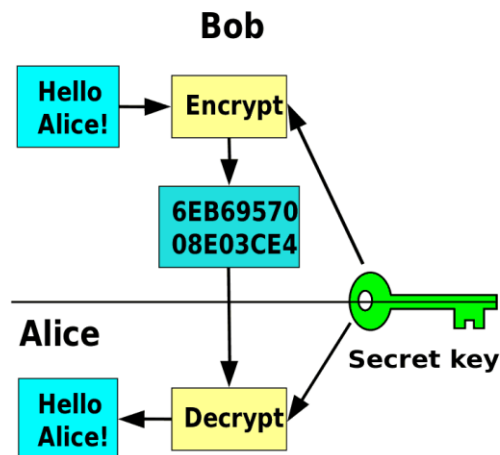


## Compression

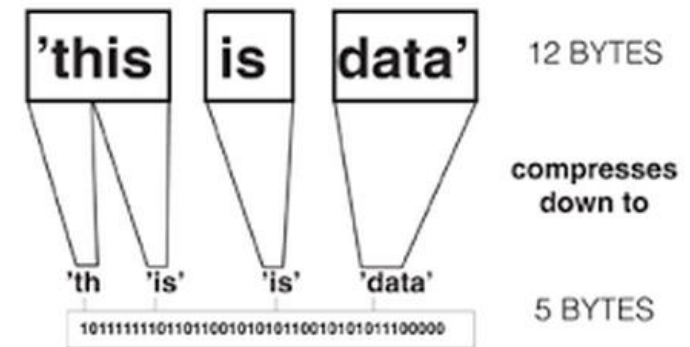

# Session Layer

Manages, monitors, and synchronizing “sessions” between endpoints


Implements checkpoints while data is flowing



**Authentication  
Authorization**





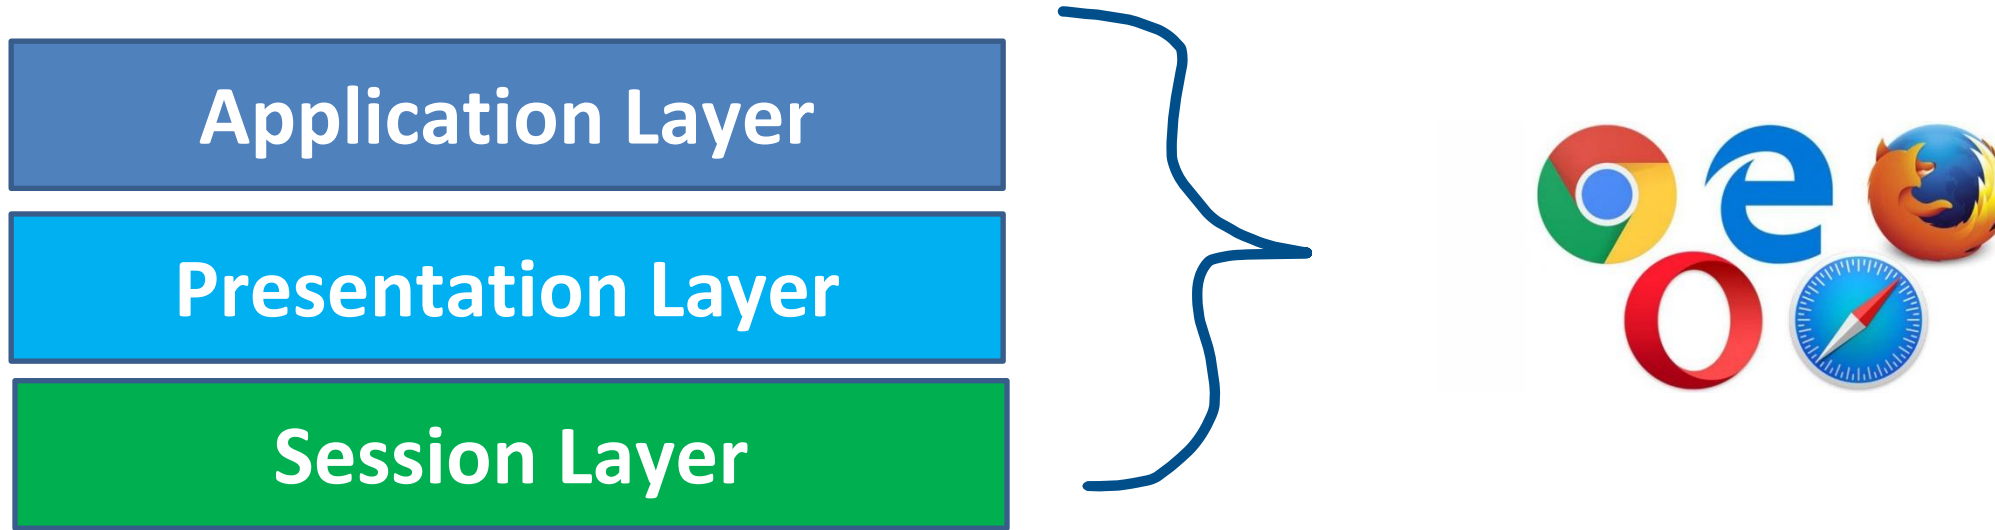



Most of this functionality is handled by our web browsers

# Transport Layer

Manages end to end communication and *method* of how data will be transferred

Ensures that the data received at host will be in the same order in which it was transmitted

Splits up packets into smaller **segments**

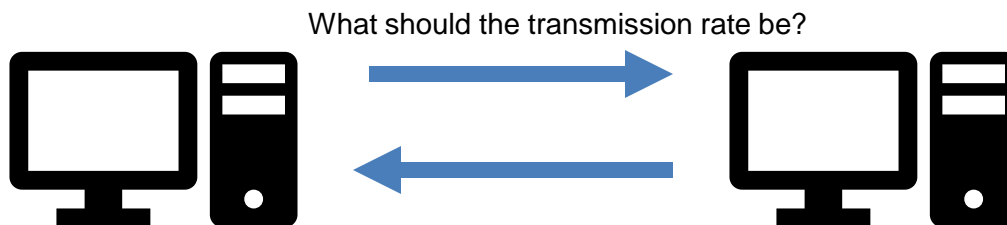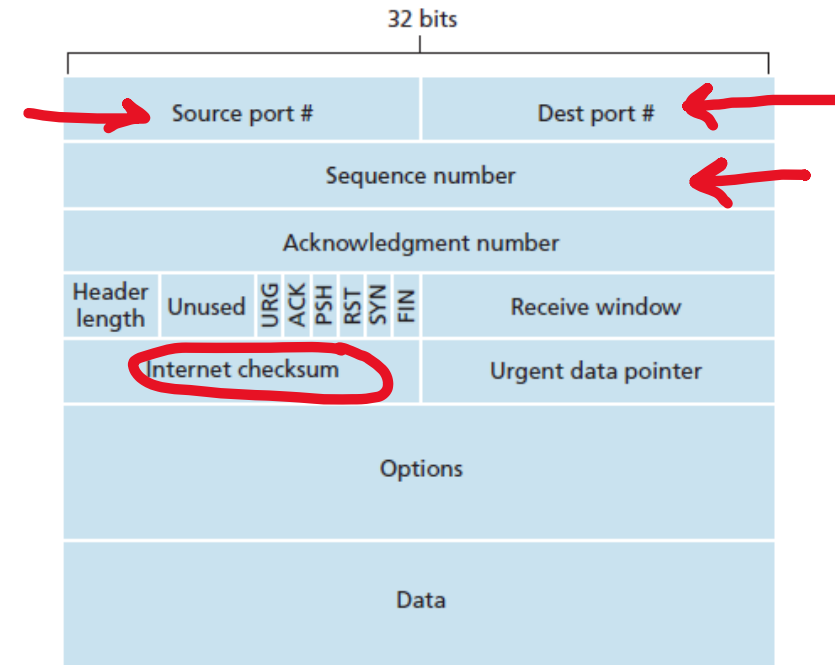


## Transmission Control Protocol (**TCP**)


- Requires an established connection to transmit data.
- Guarantees delivery of data in order
- Extensive error checking and acknowledgement of data

## User Datagram Protocol (**UDP**)

- Connectionless protocol
- Faster, Simpler
- Not reliable
- No acknowledgement of data, basic error checking

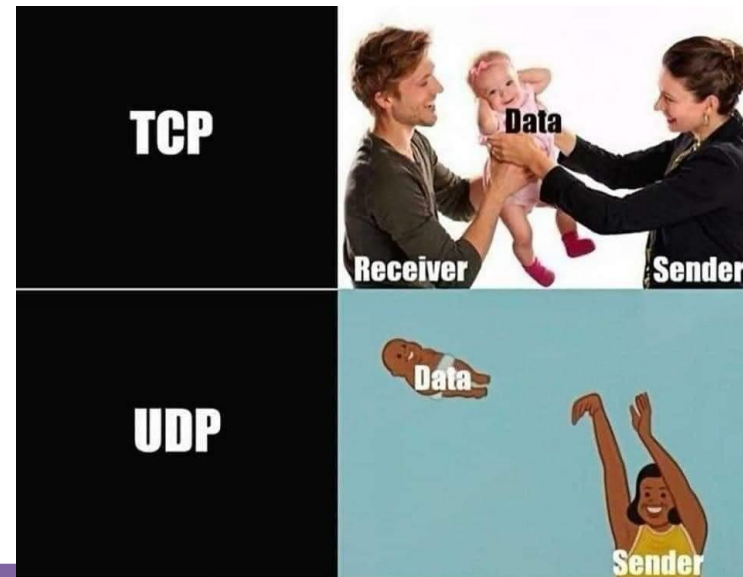

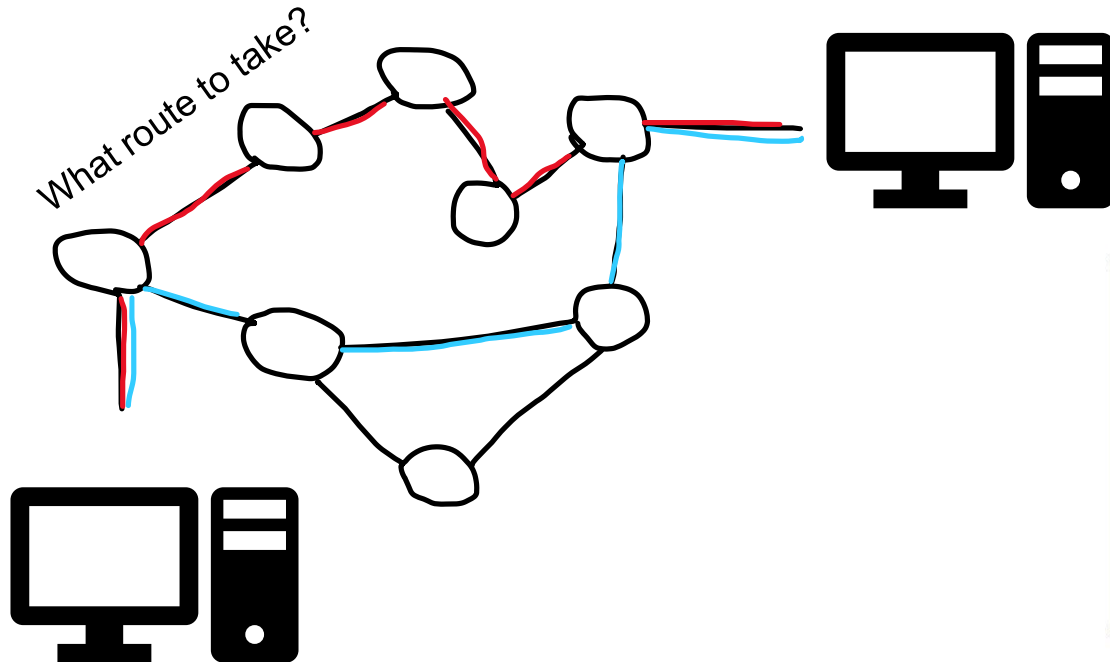

Primary purpose is to move **datagrams** from one host to another, and to determine physical path to destination




We also assign **IP addresses** to our packet

IPv4 Packet Header Format

Bit #	0		7	8	15		16	23		24	31	
0	Version		IHL	DSCP		ECN	Total Length					
32	Identification					Flags	Fragment Offset					
64	Time to Live			Protocol			Header Checksum					
96	Source IP Address											
128	 Destination IP Address											
160	Options (if IHL > 5)											


# Data Link Layer

Handles the formatting and physical addressing of the “packet” before reaching the destination

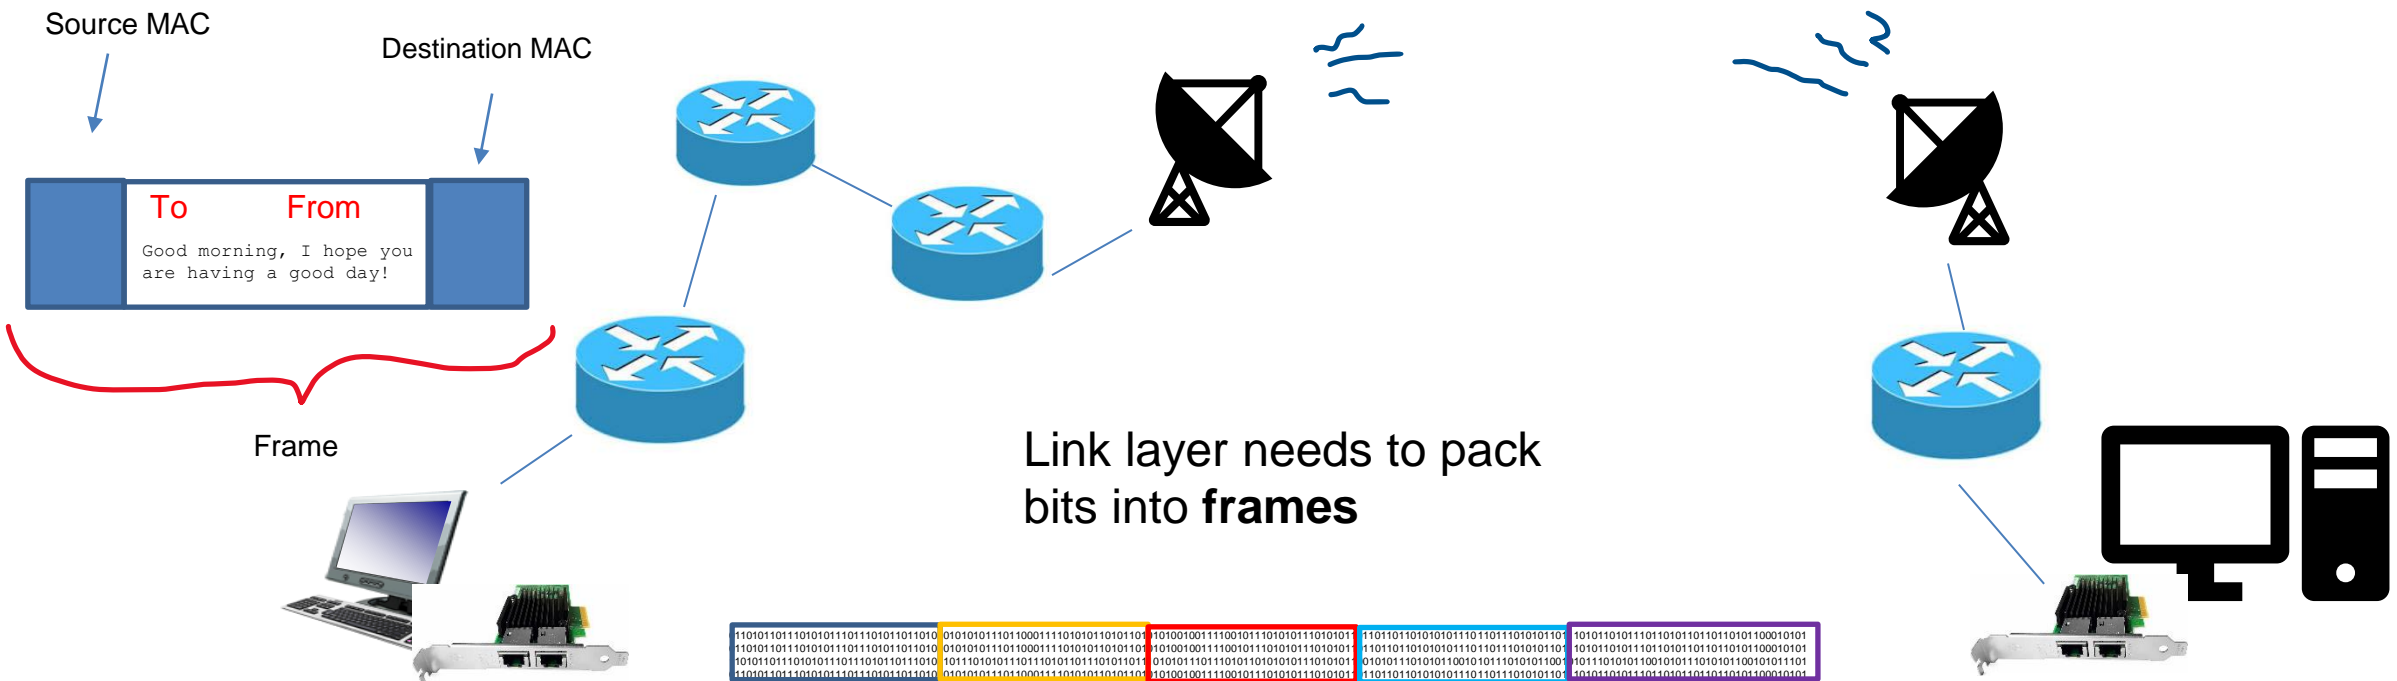


# Physical Layer


Transmits bits into physical signals over some medium

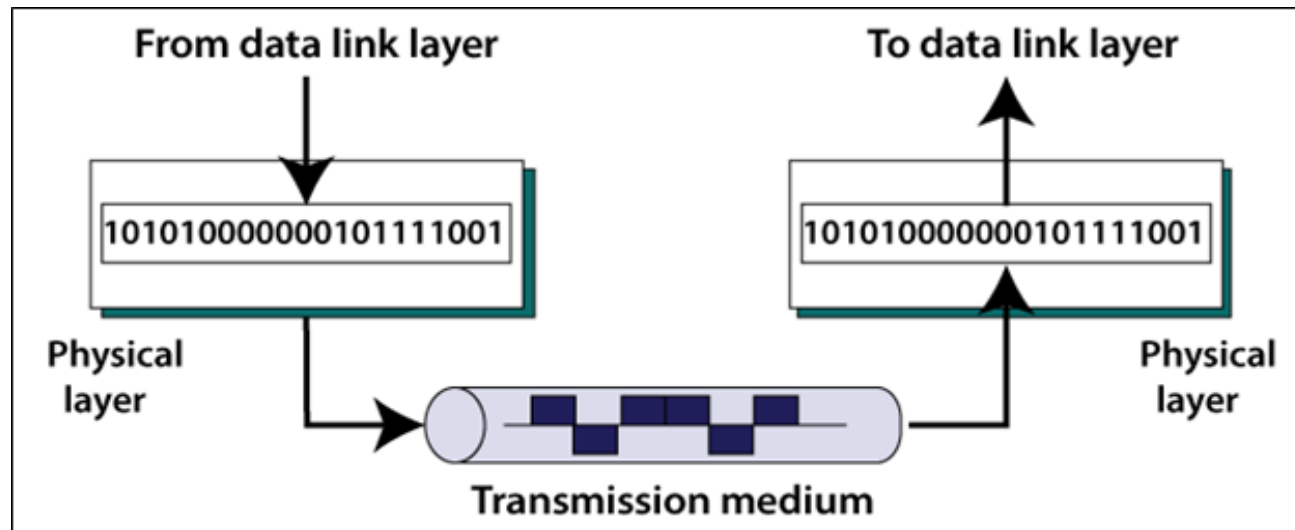

# Encapsulation


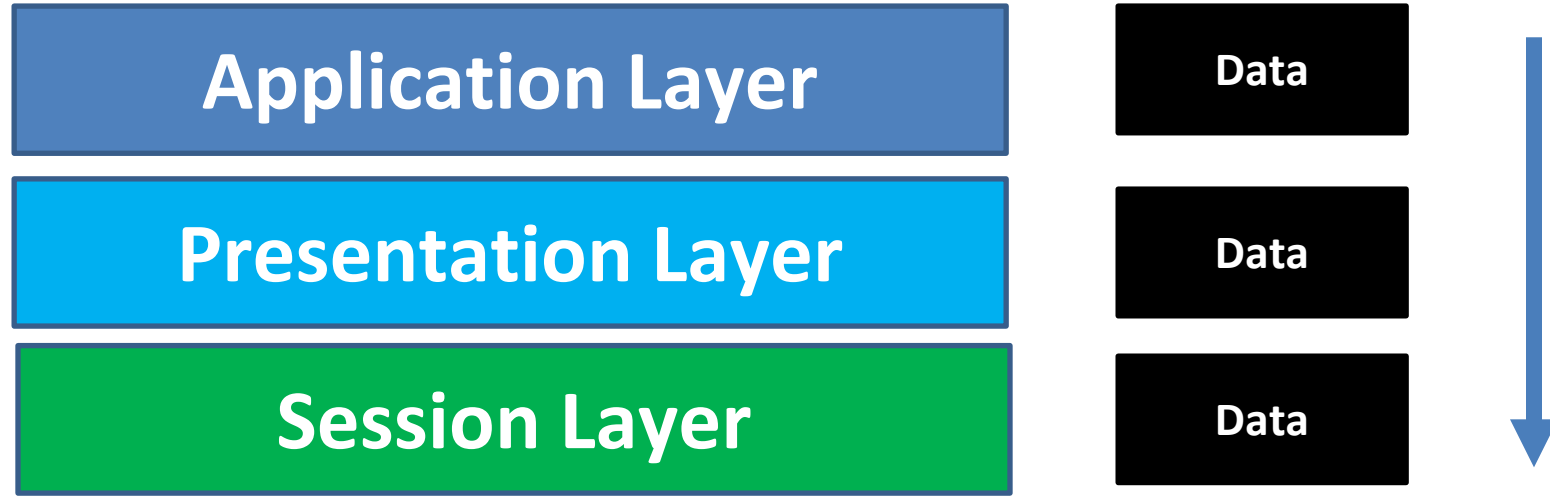


# Encapsulation


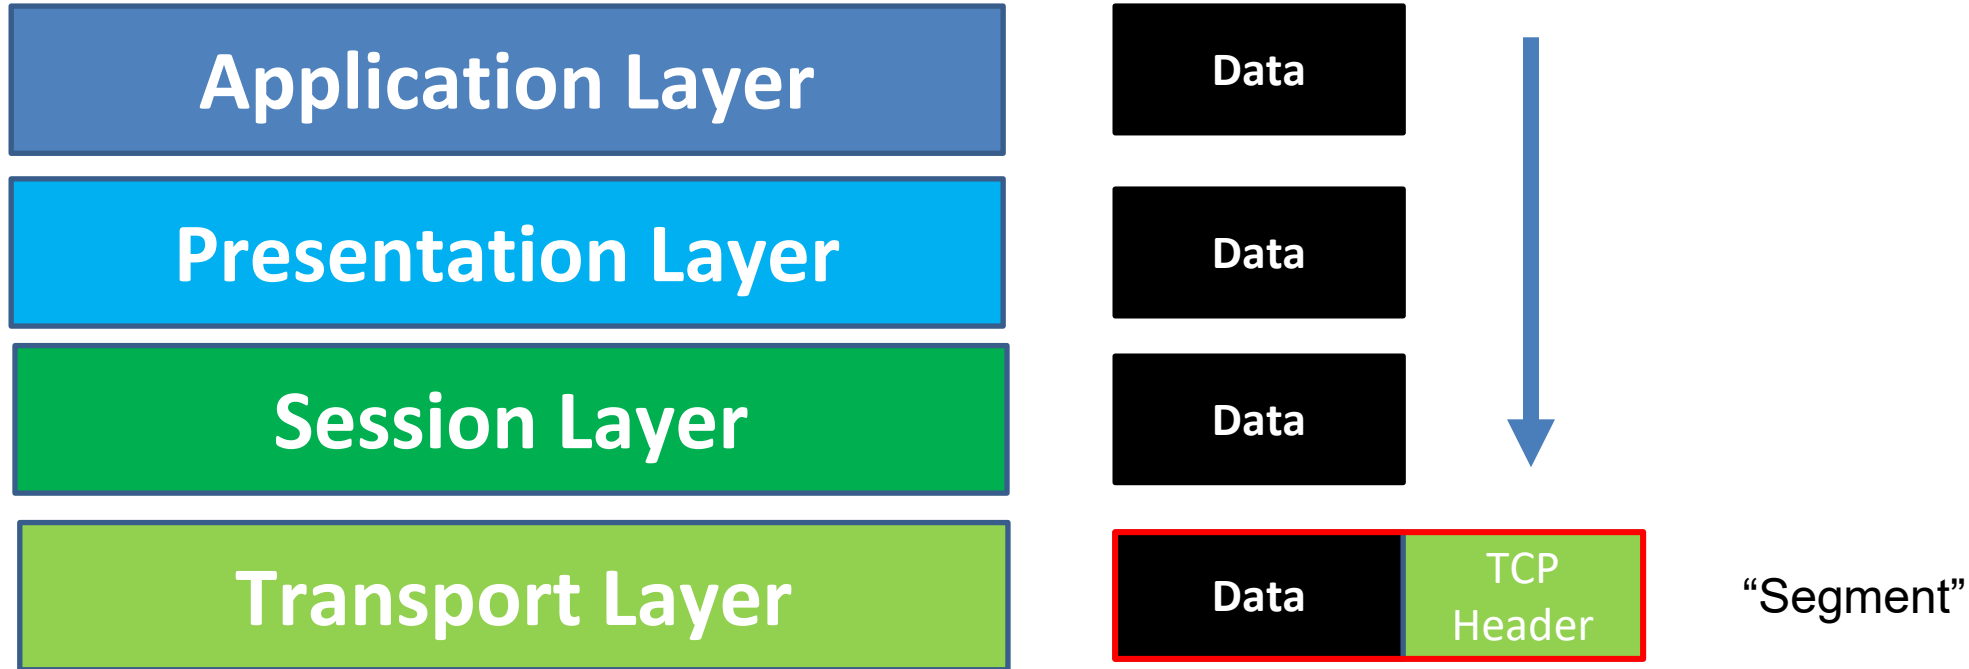






# Encapsulation

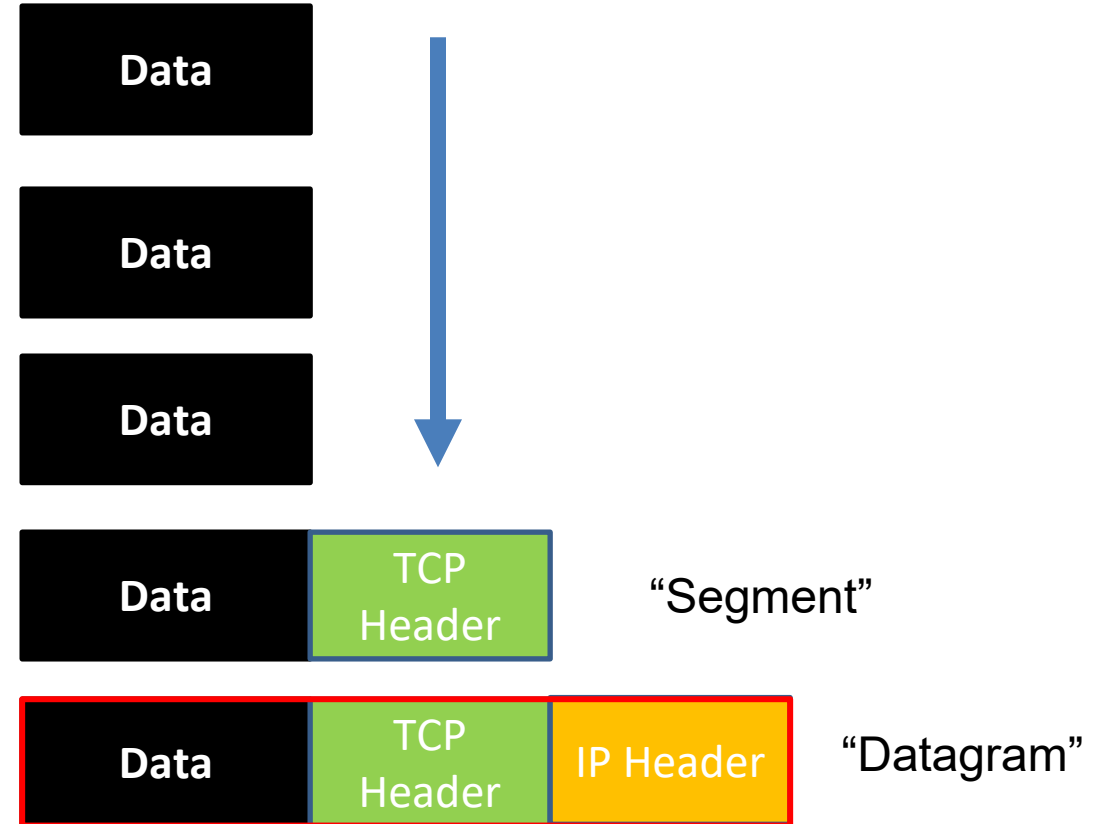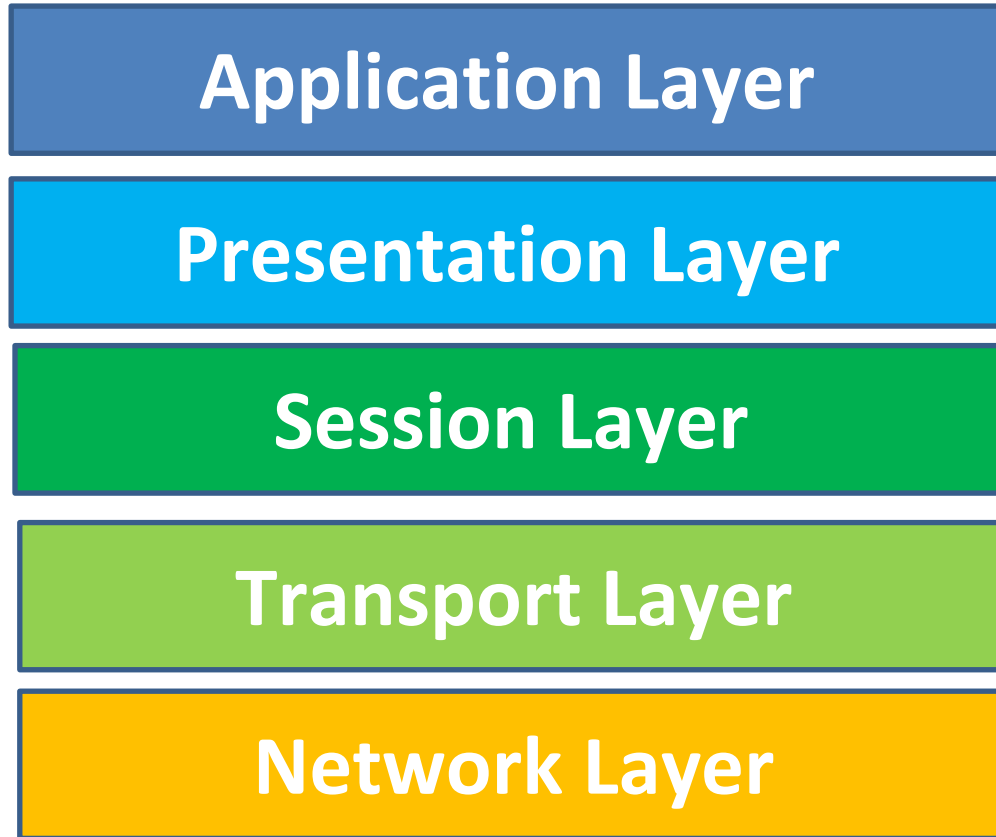


# Encapsulation

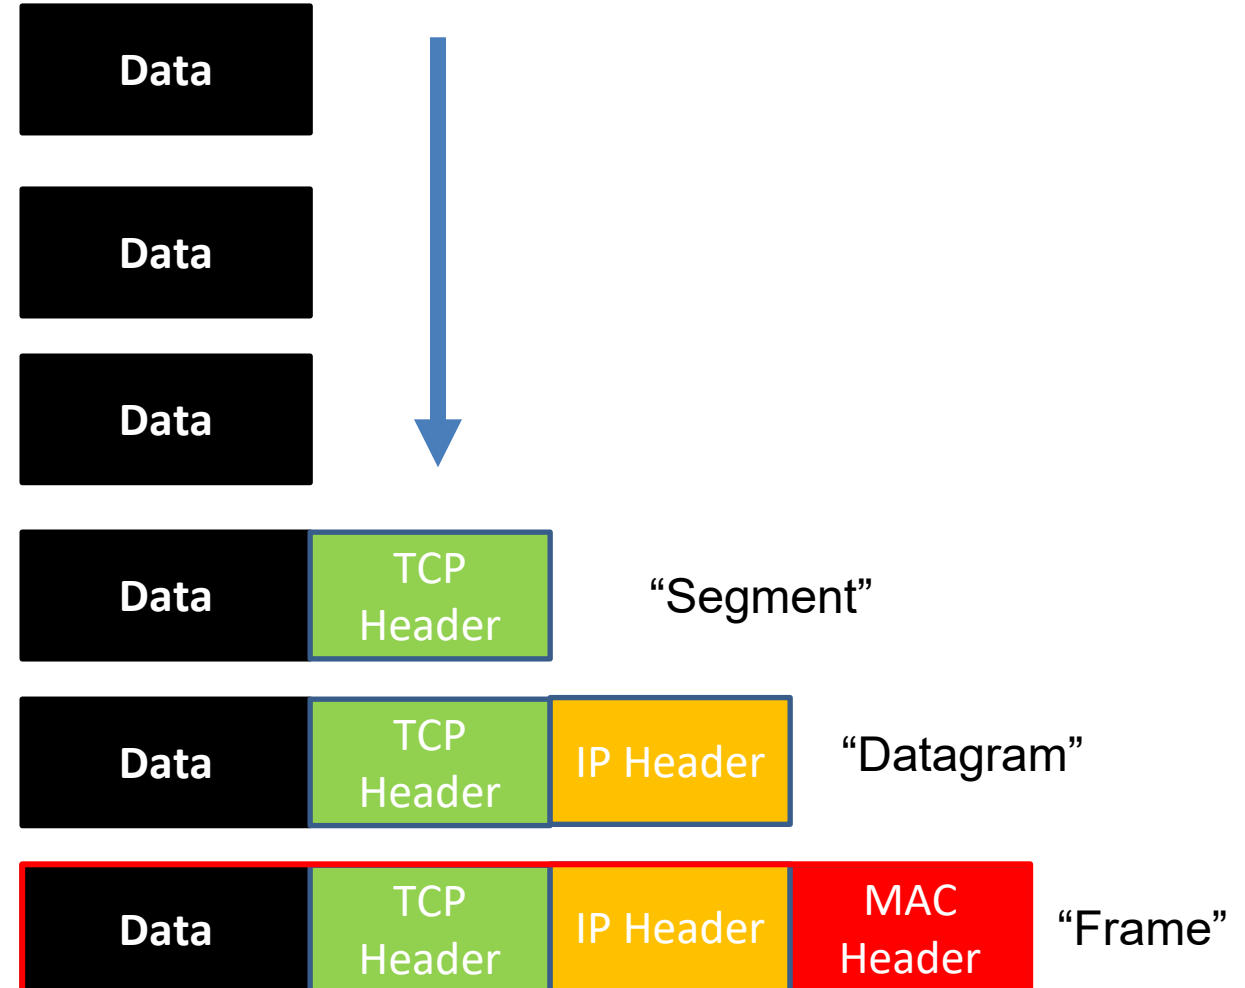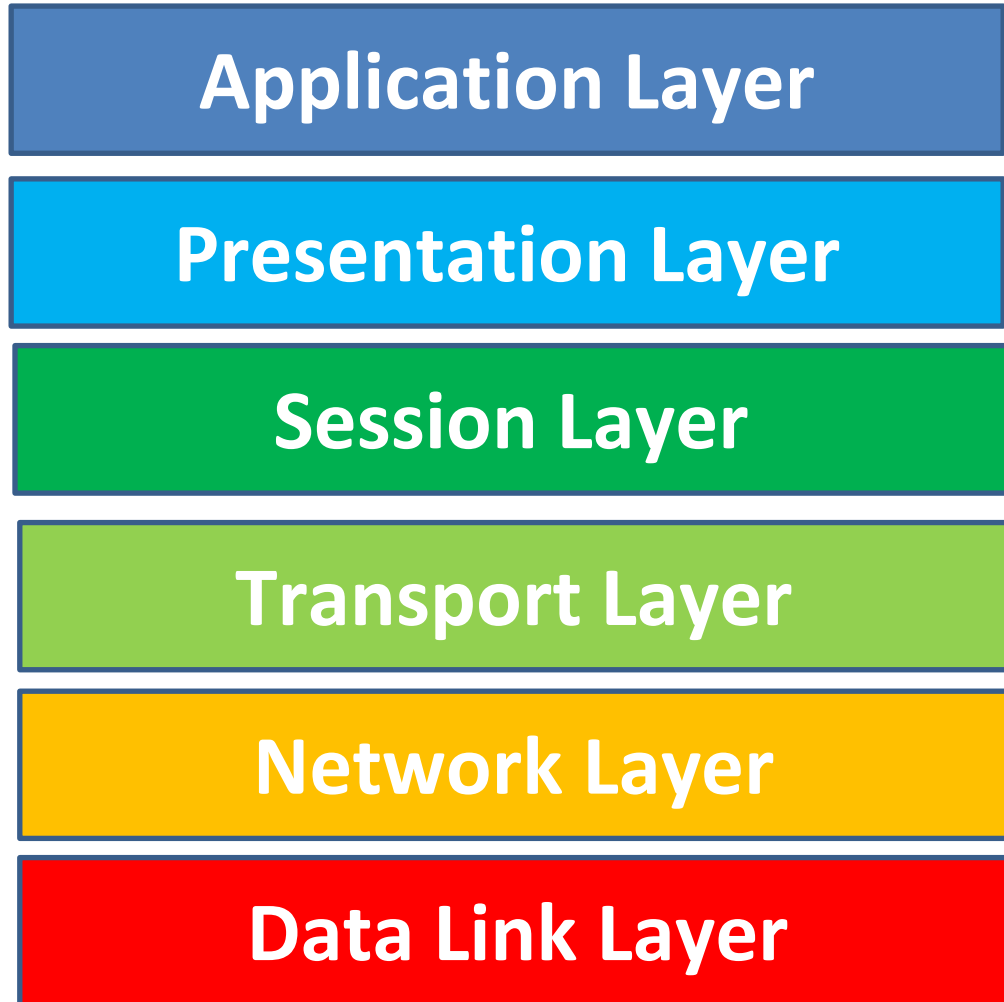

# Encapsulation

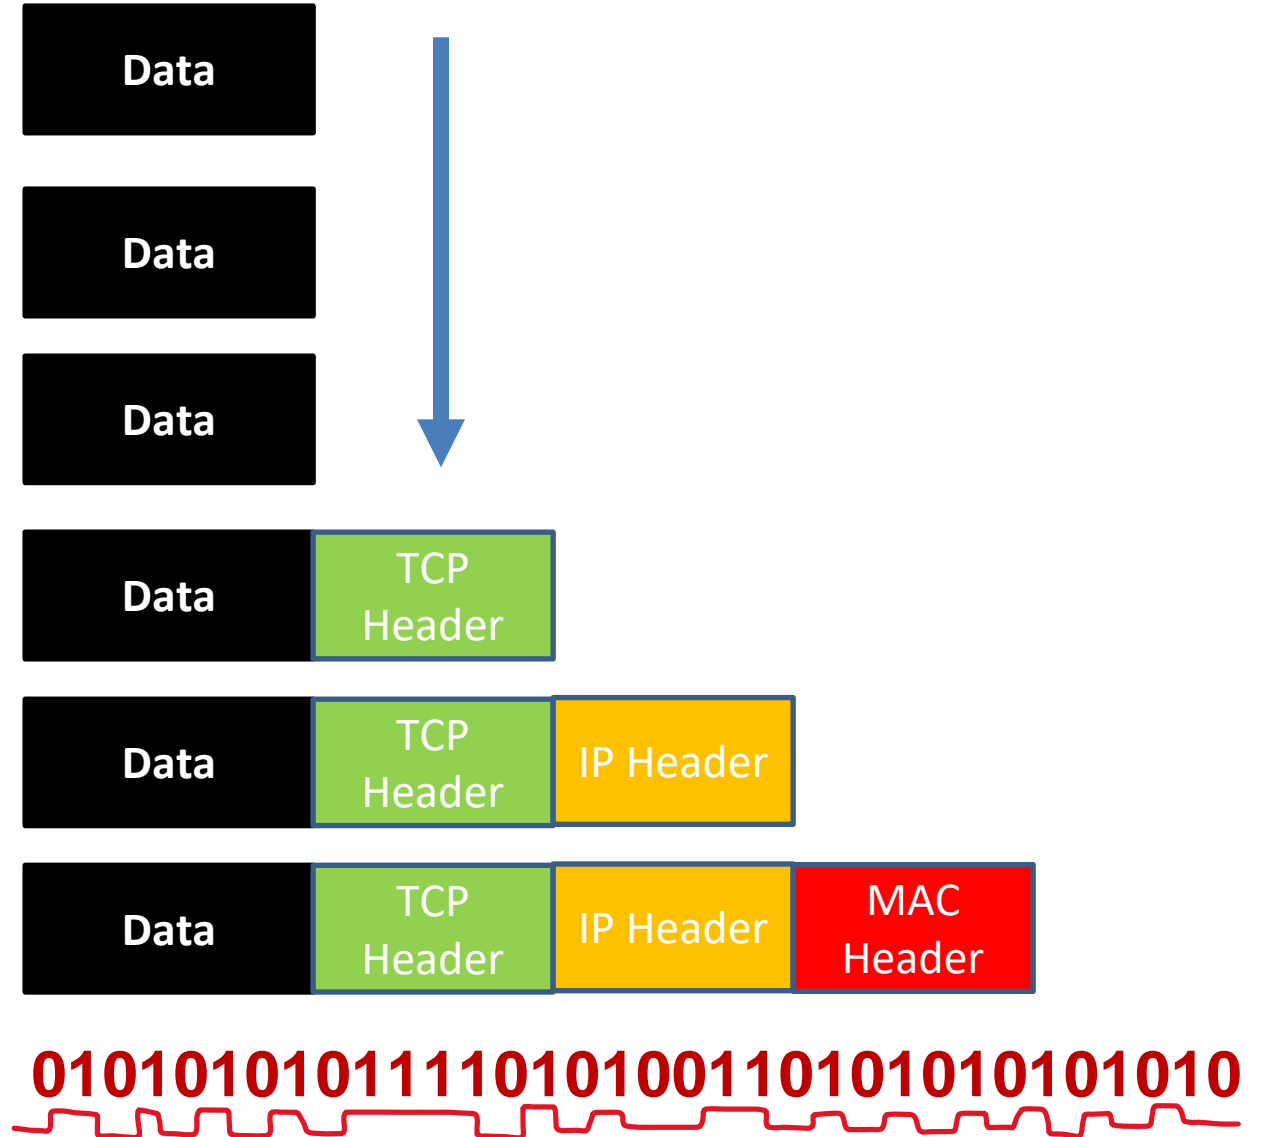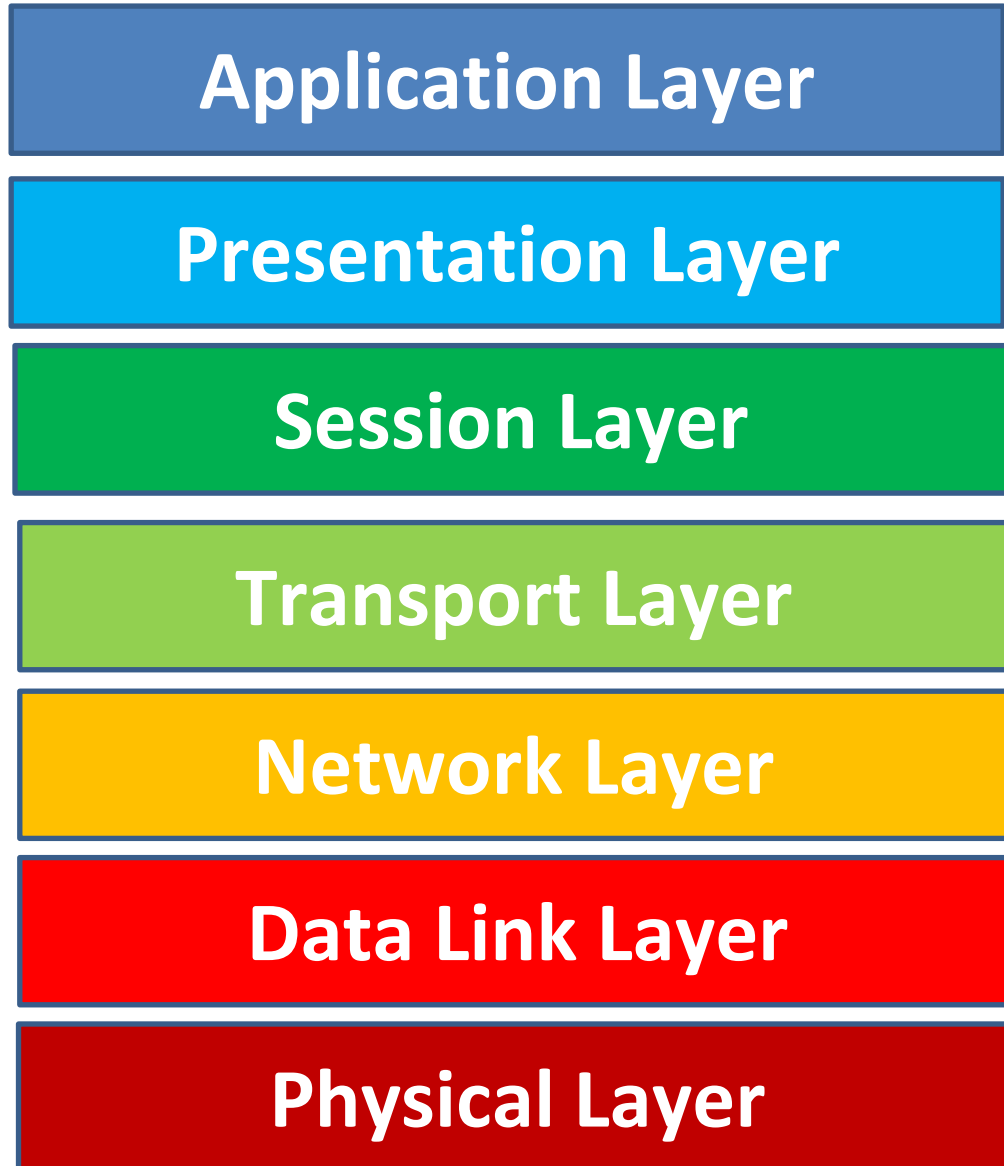

# Encapsulation

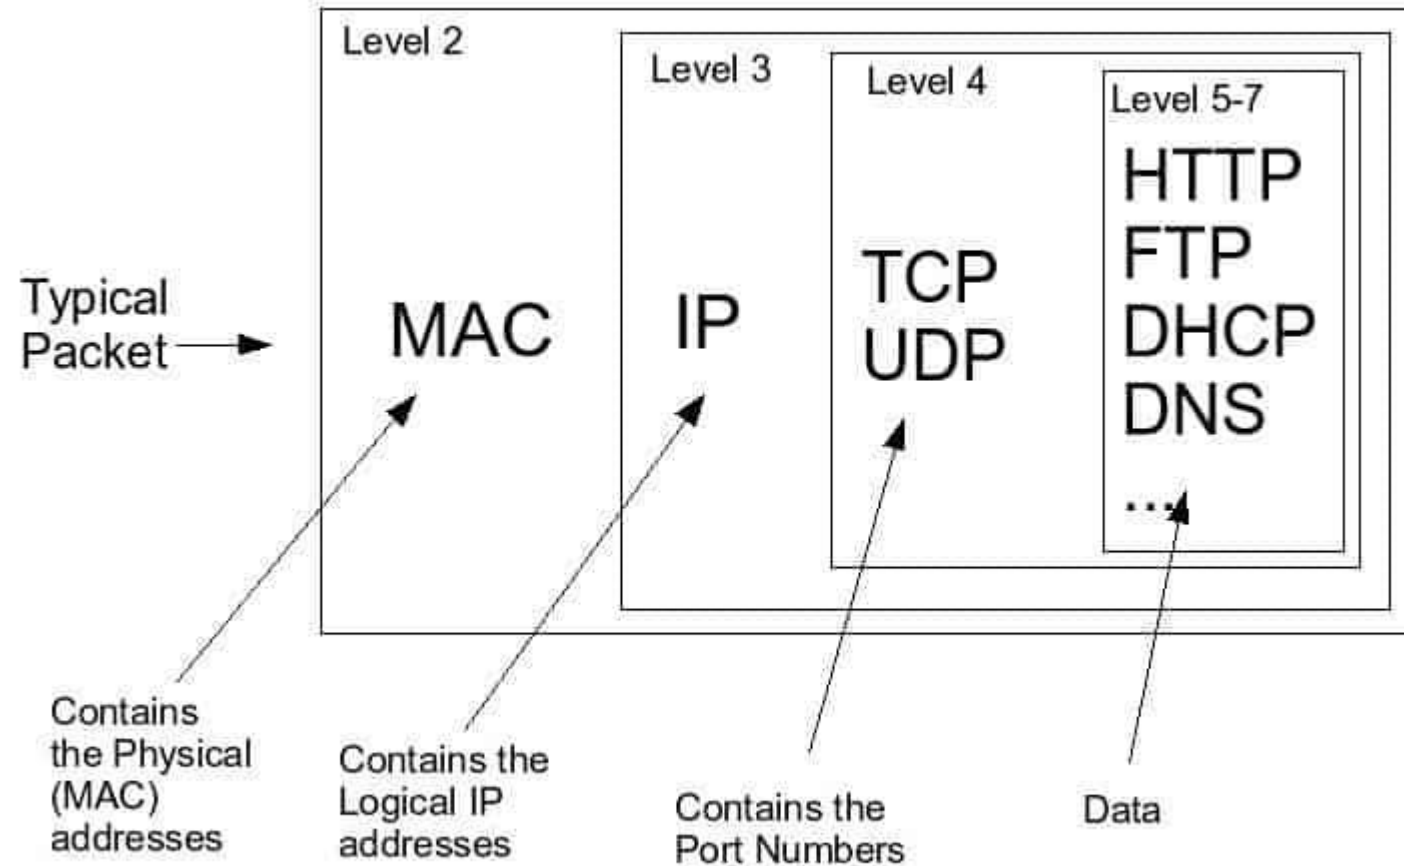

Ticket (purchase)





Ticket (purchase)

Baggage (Check)



Ticket (purchase)

Baggage (Check)

Gates (load)



Ticket (purchase)

Baggage (Check)

Gates (load)

Runway Takeoff





Ticket (purchase)

Baggage (Check)

Gates (load)

Runway Takeoff

Airplane Routing



Ticket (purchase)

Baggage (Check)

Gates (load)

Runway Takeoff

Airplane Routing

Airplane Routing



Ticket (purchase)

Baggage (Check)

Gates (load)

Runway Takeoff

Airplane Routing

Runway landing

Airplane Routing



Ticket (purchase)

Baggage (Check)

Gates (load)

Runway Takeoff

Airplane Routing

Gates (unload)

Runway landing

Airplane Routing



Ticket (purchase)

Baggage (Check)

Gates (load)

Runway Takeoff


Airplane Routing


Baggage (claim)


Gates (unload)

Runway landing


Airplane Routing

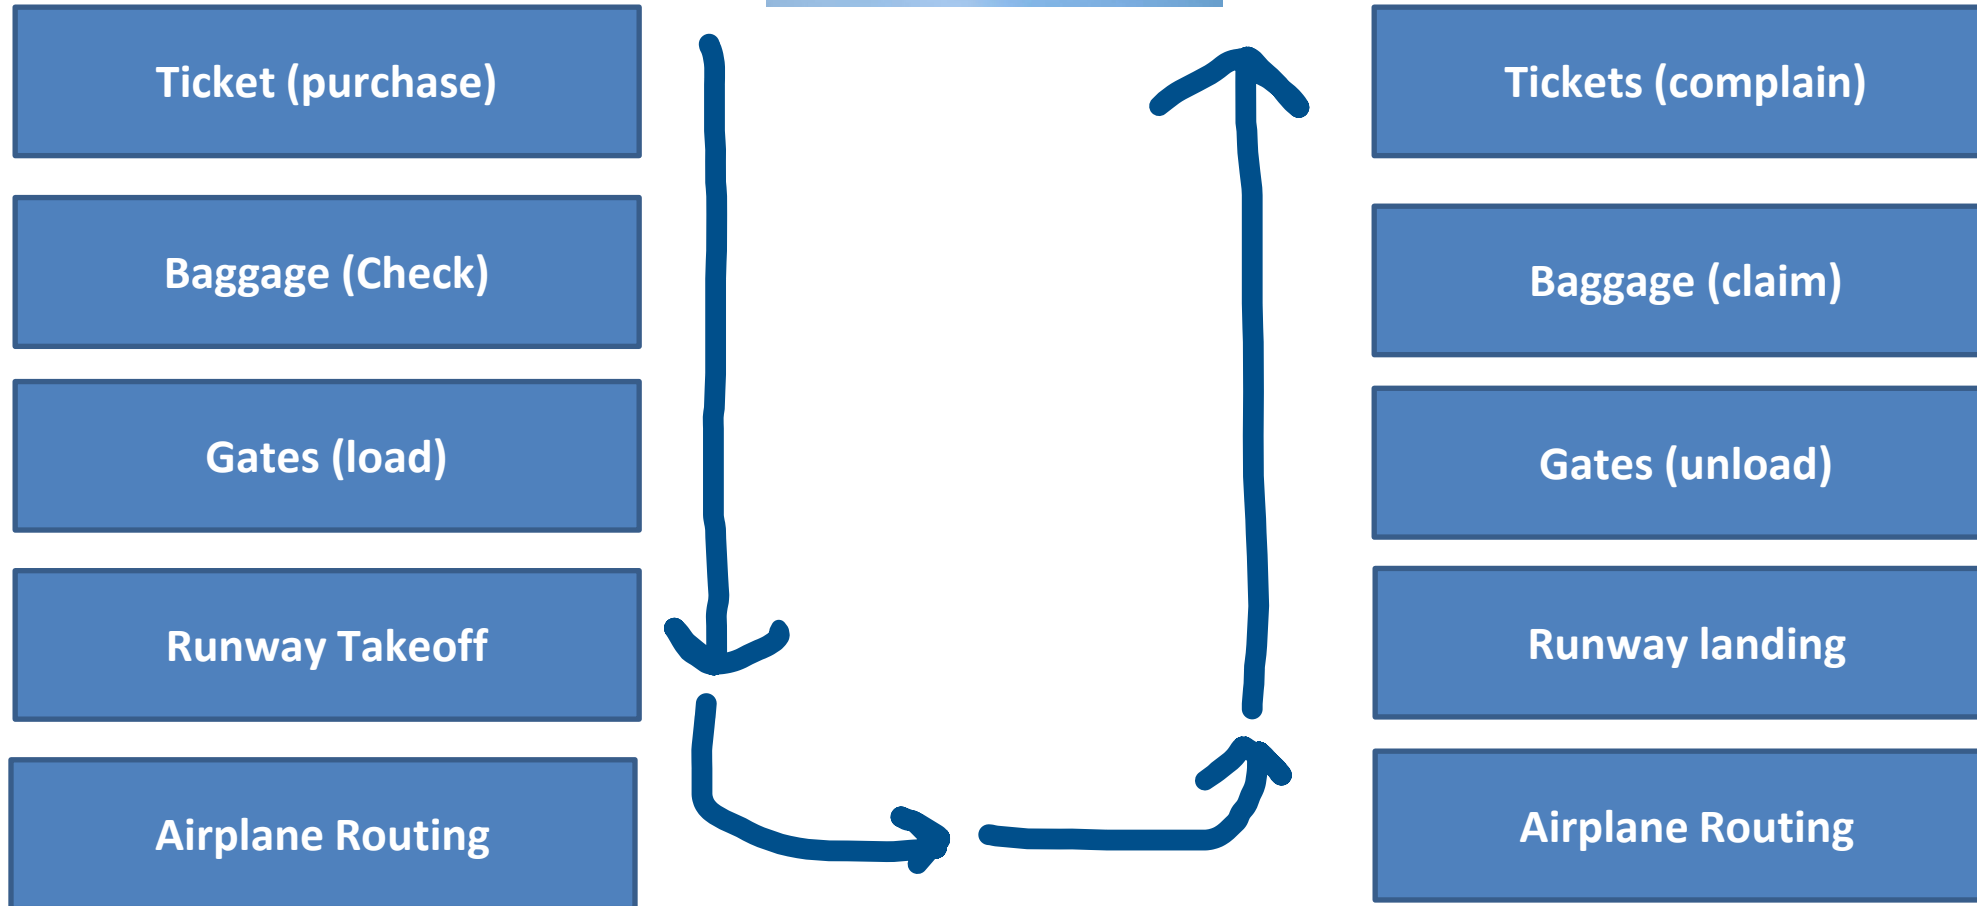

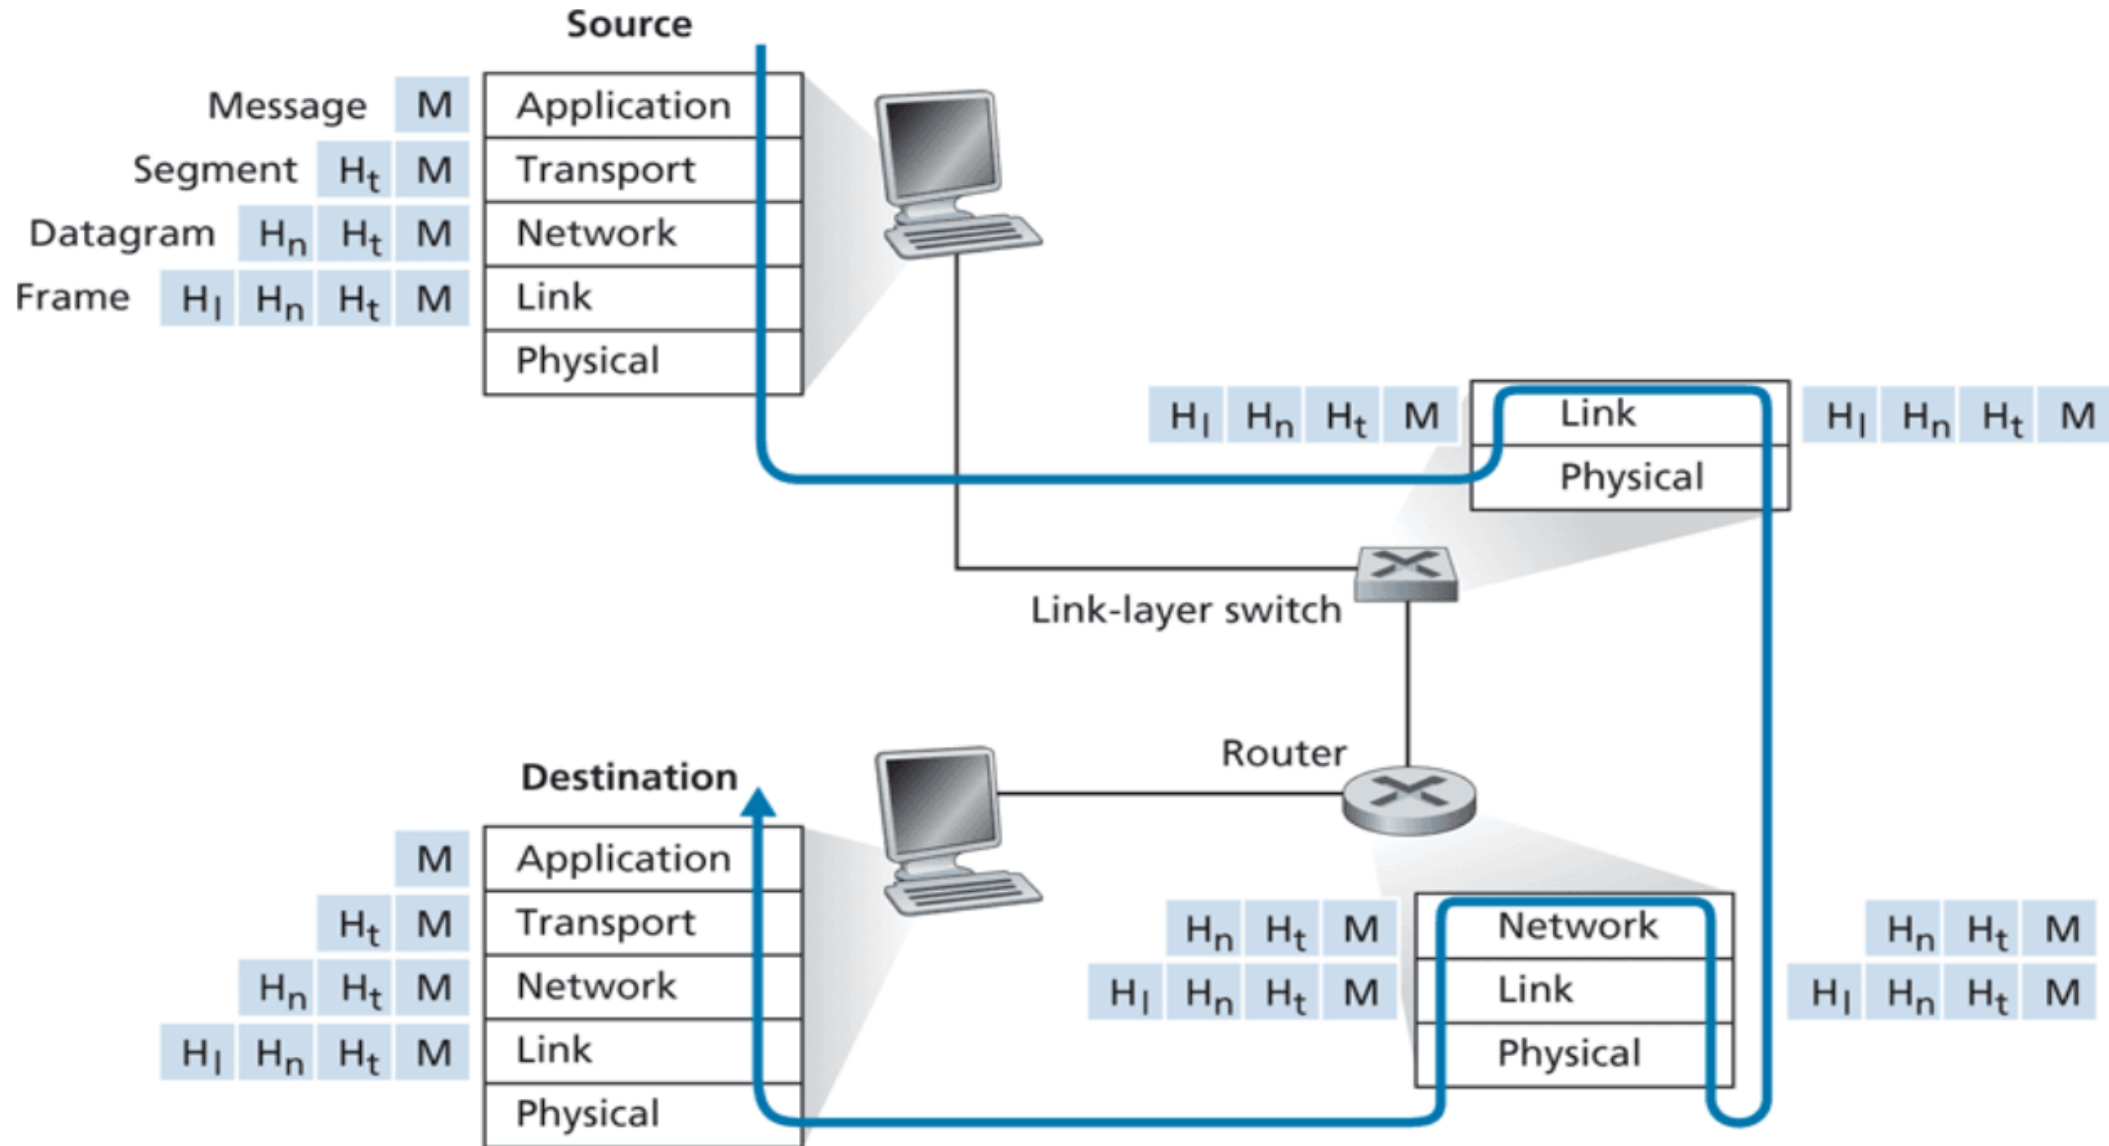

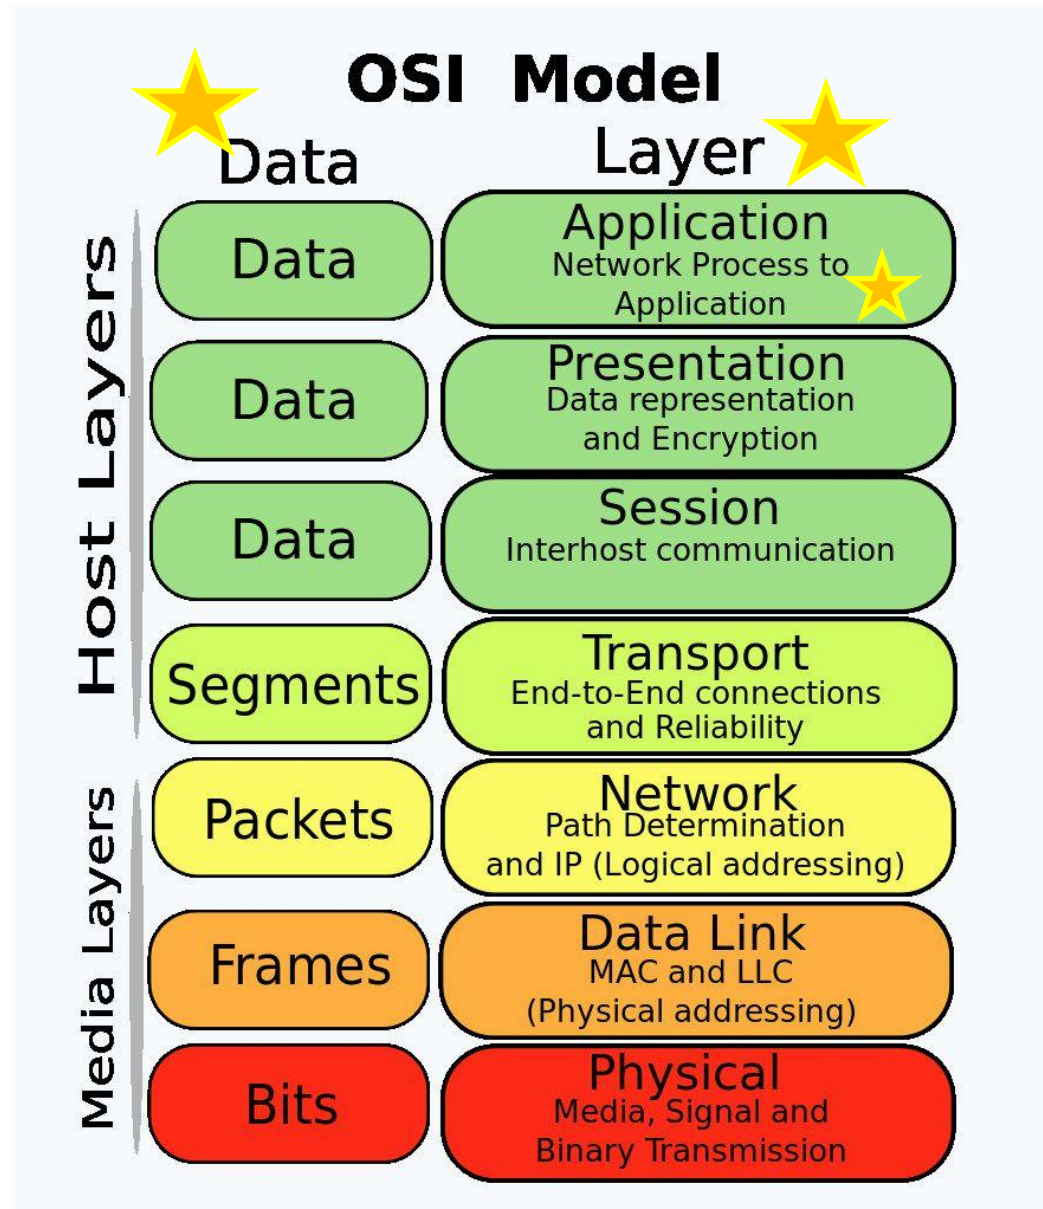



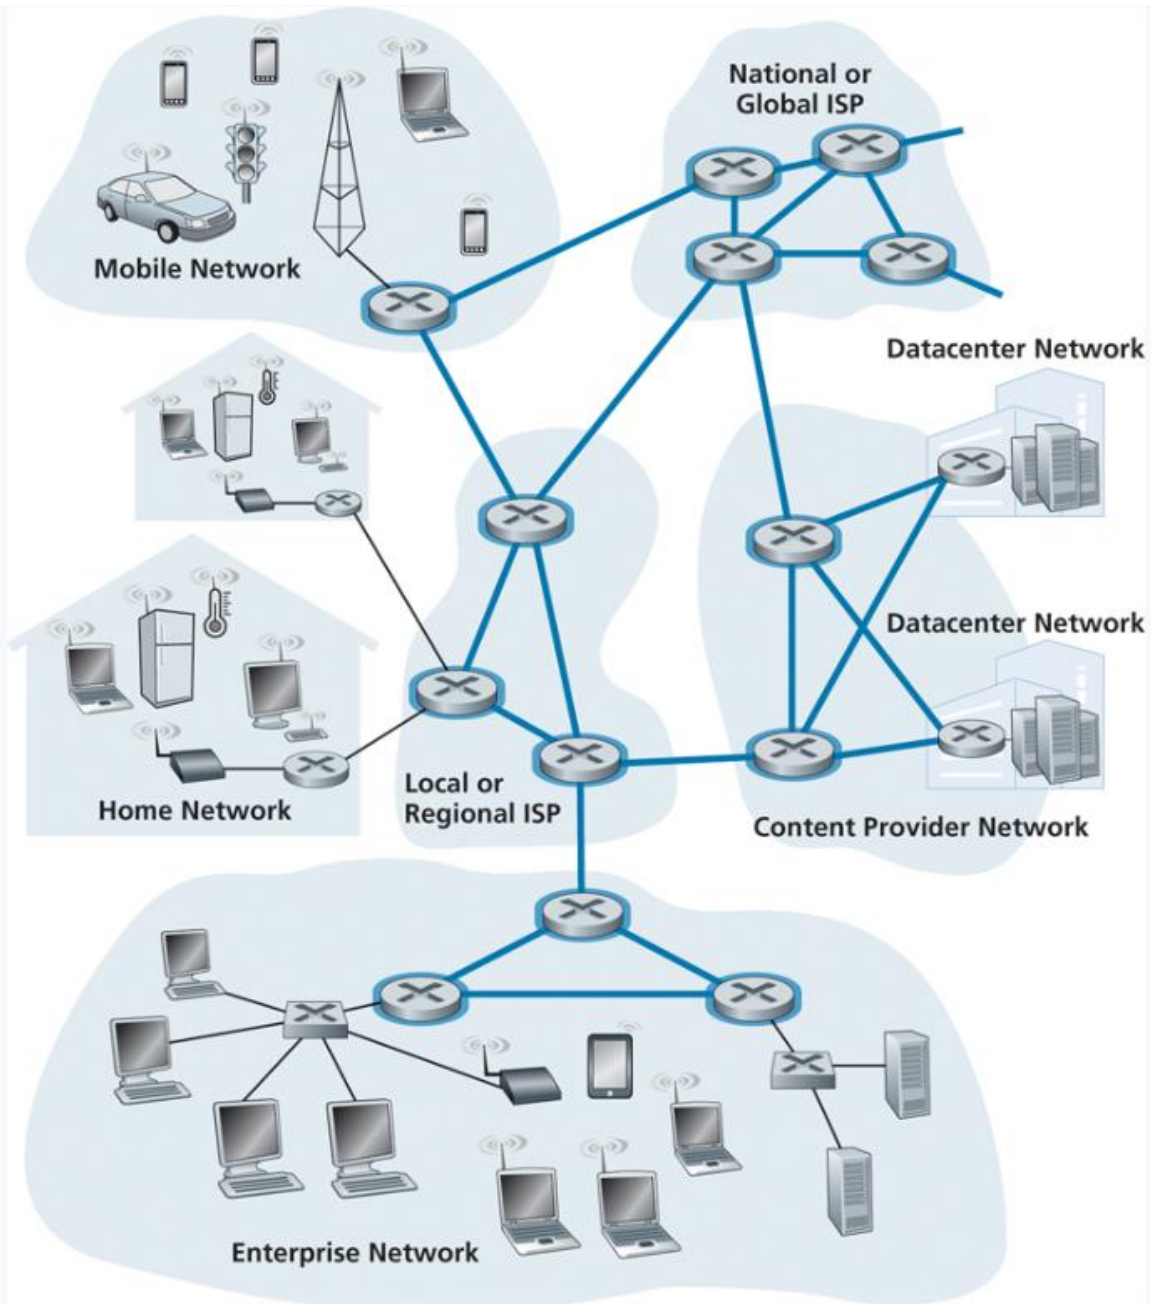

The internet is a *network of networks*, connected by **packet switches** and **communication links**

Messages going from A to B are split into **packets**

“Good morning, I hope you are having a good day!”



To: Host A  
John Paxton  
192.42.98.11

From: Host B  
Reese Pearsall  
192.5.223.42

Good morning, I hope you  
are having a good day!


Generated Packet

Communication links have different transmission rates

10 Mbps

500 kbps

100 kbps

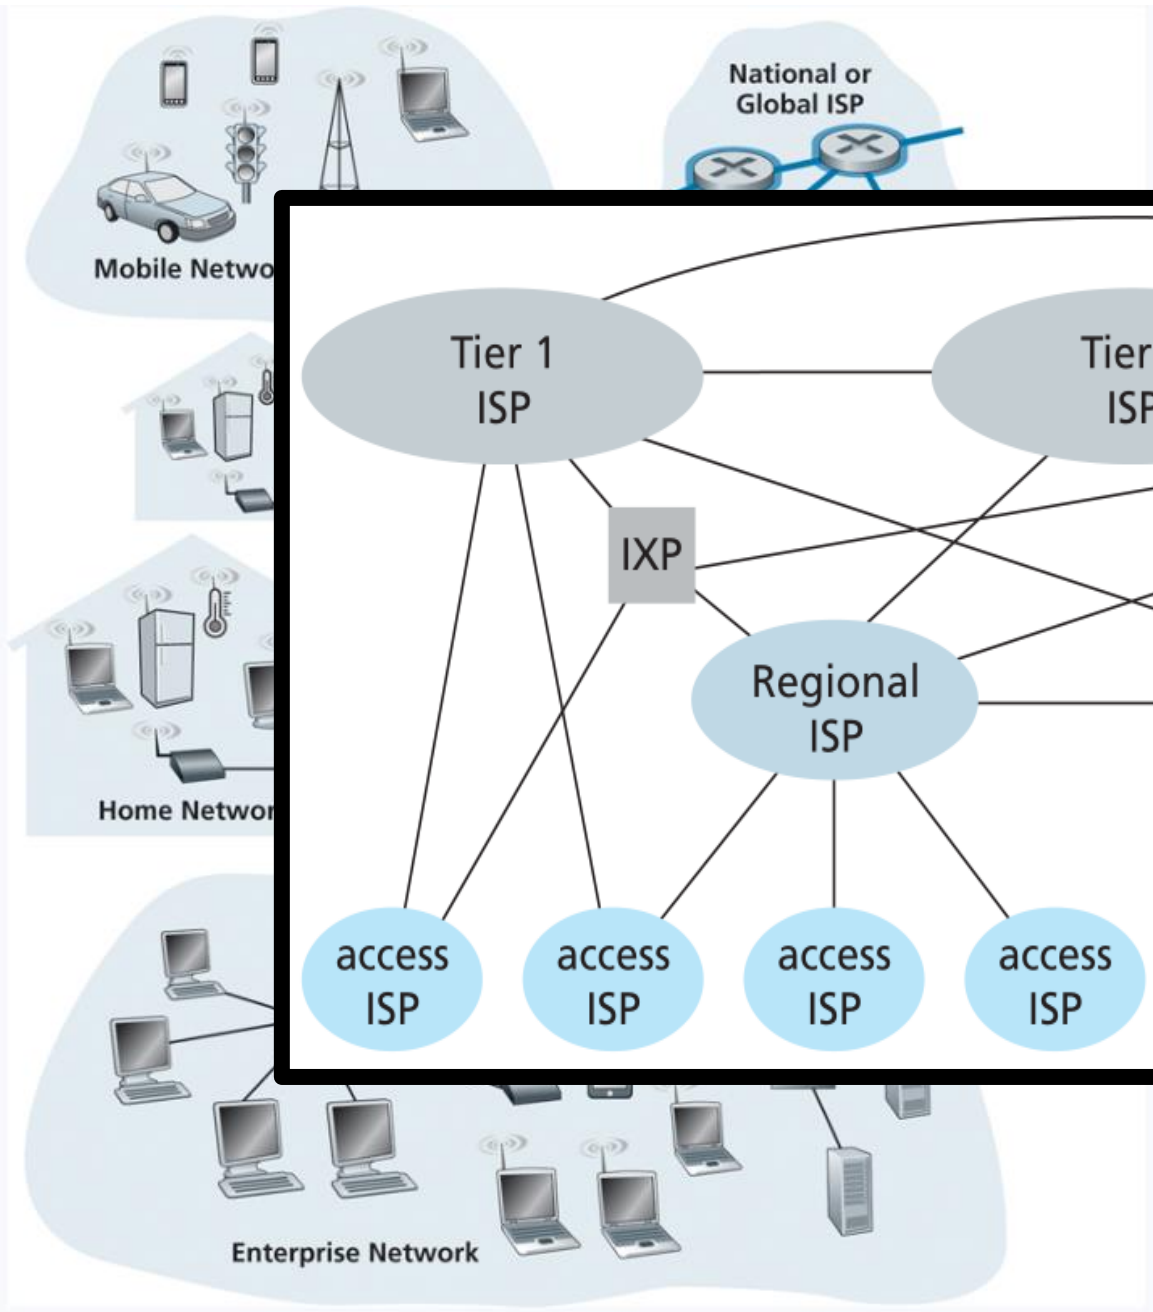


The internet is a *network of networks*, connected by **on links**

into **packets**

Generated Packet

mission rates

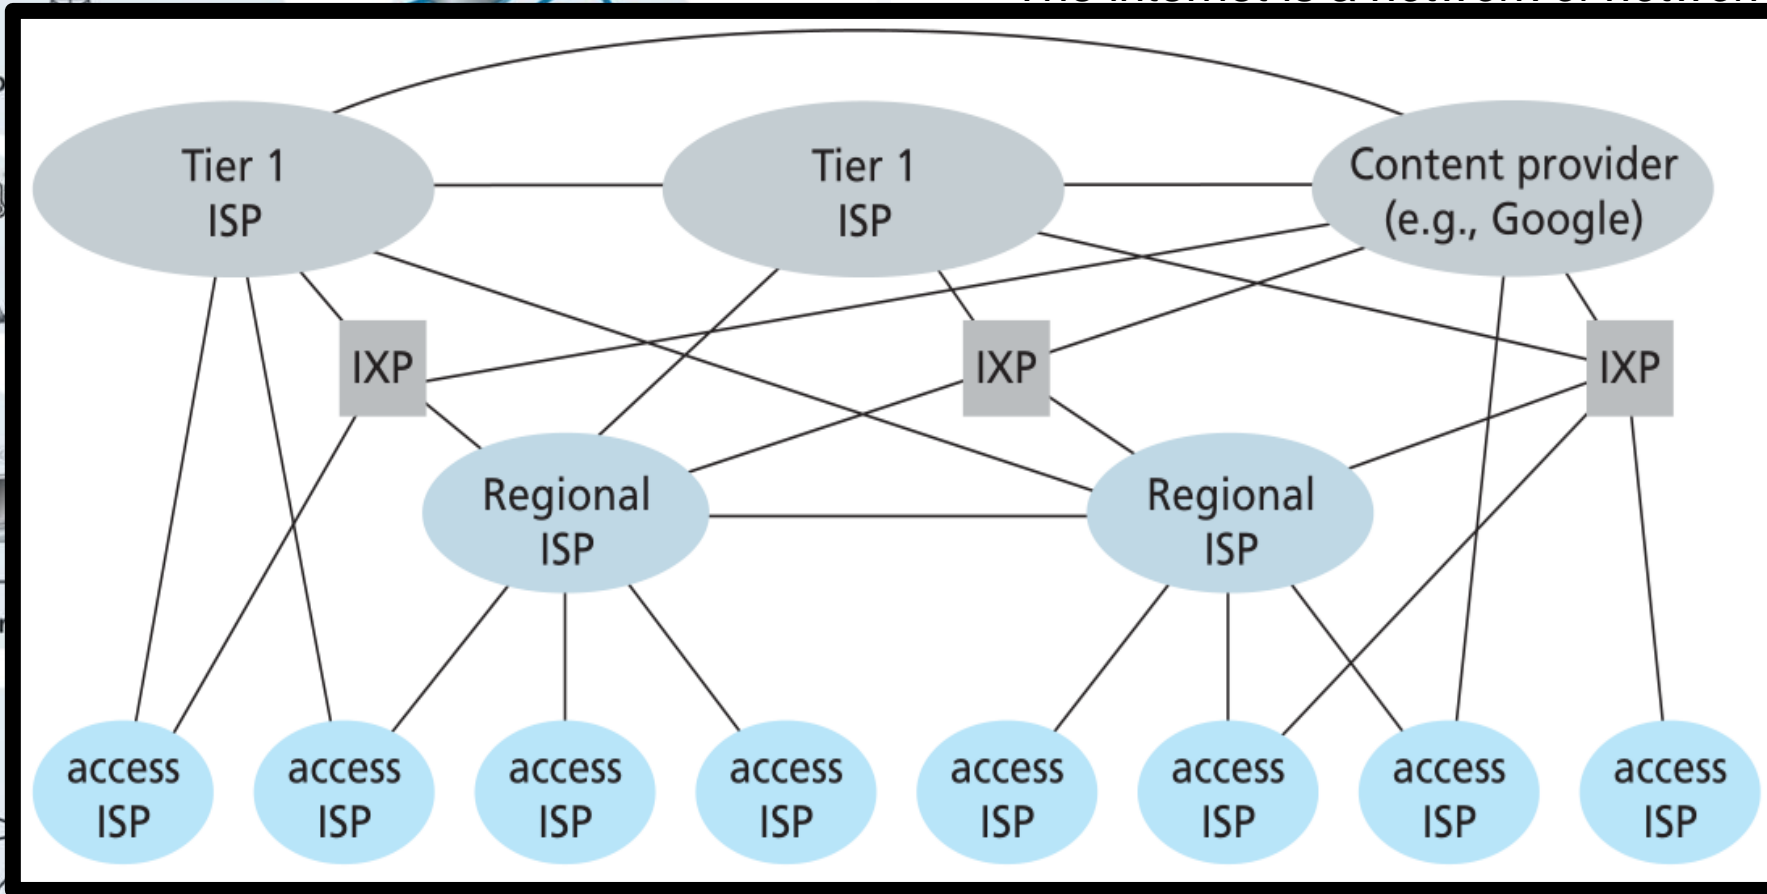


10 Mbps

500 kbps


100 kbps

# Data Forwarding

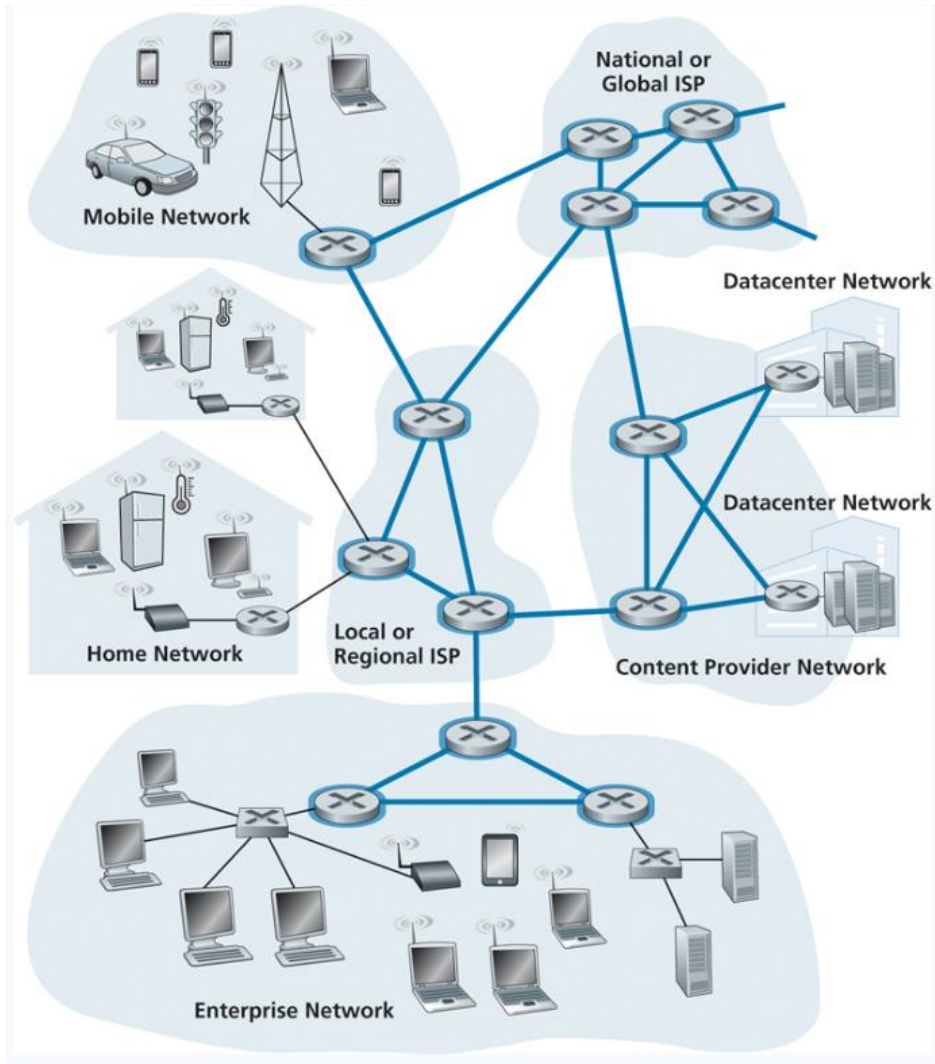


# Packet Switching

Uses **store-and-forward** transmission

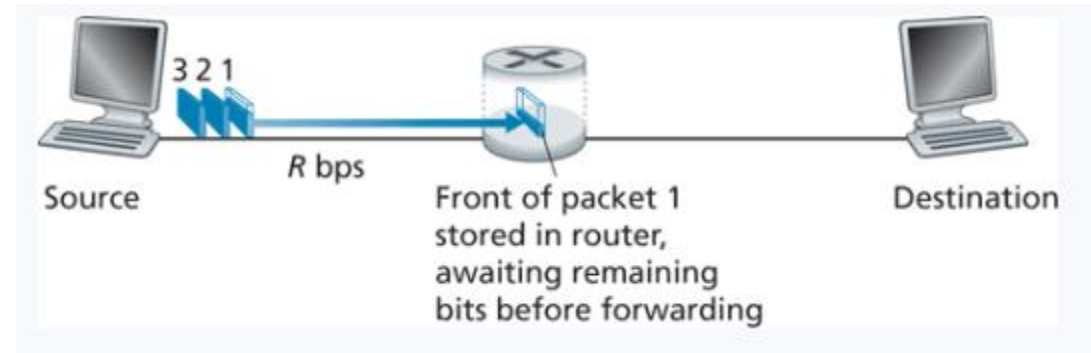


**Store and forward-** wait for the entire packet to arrive, check value(s) of packet, and then forward to next location

# Data Forwarding

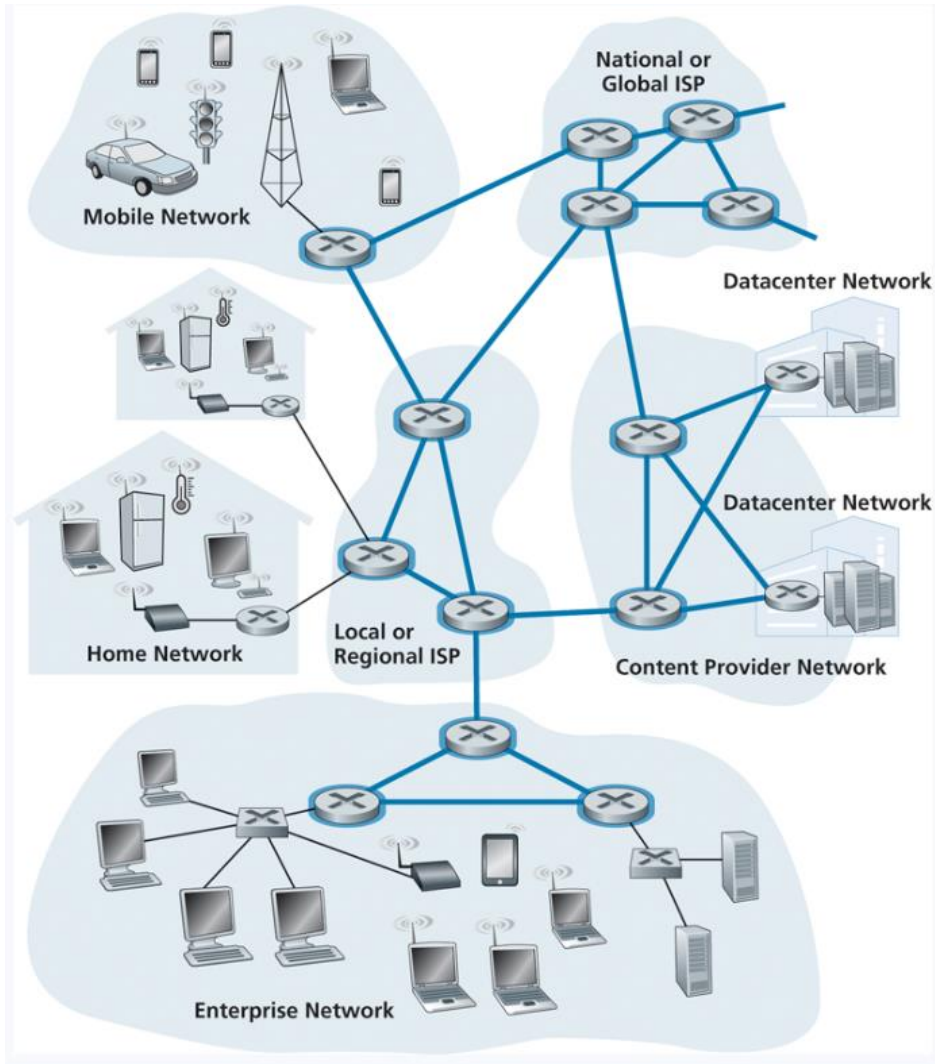

## Routing Table


Network 192.47.0.1



Network 192.27.3.11




Network 192.4.02.11



Network 101.0.1



Network 103.44.7

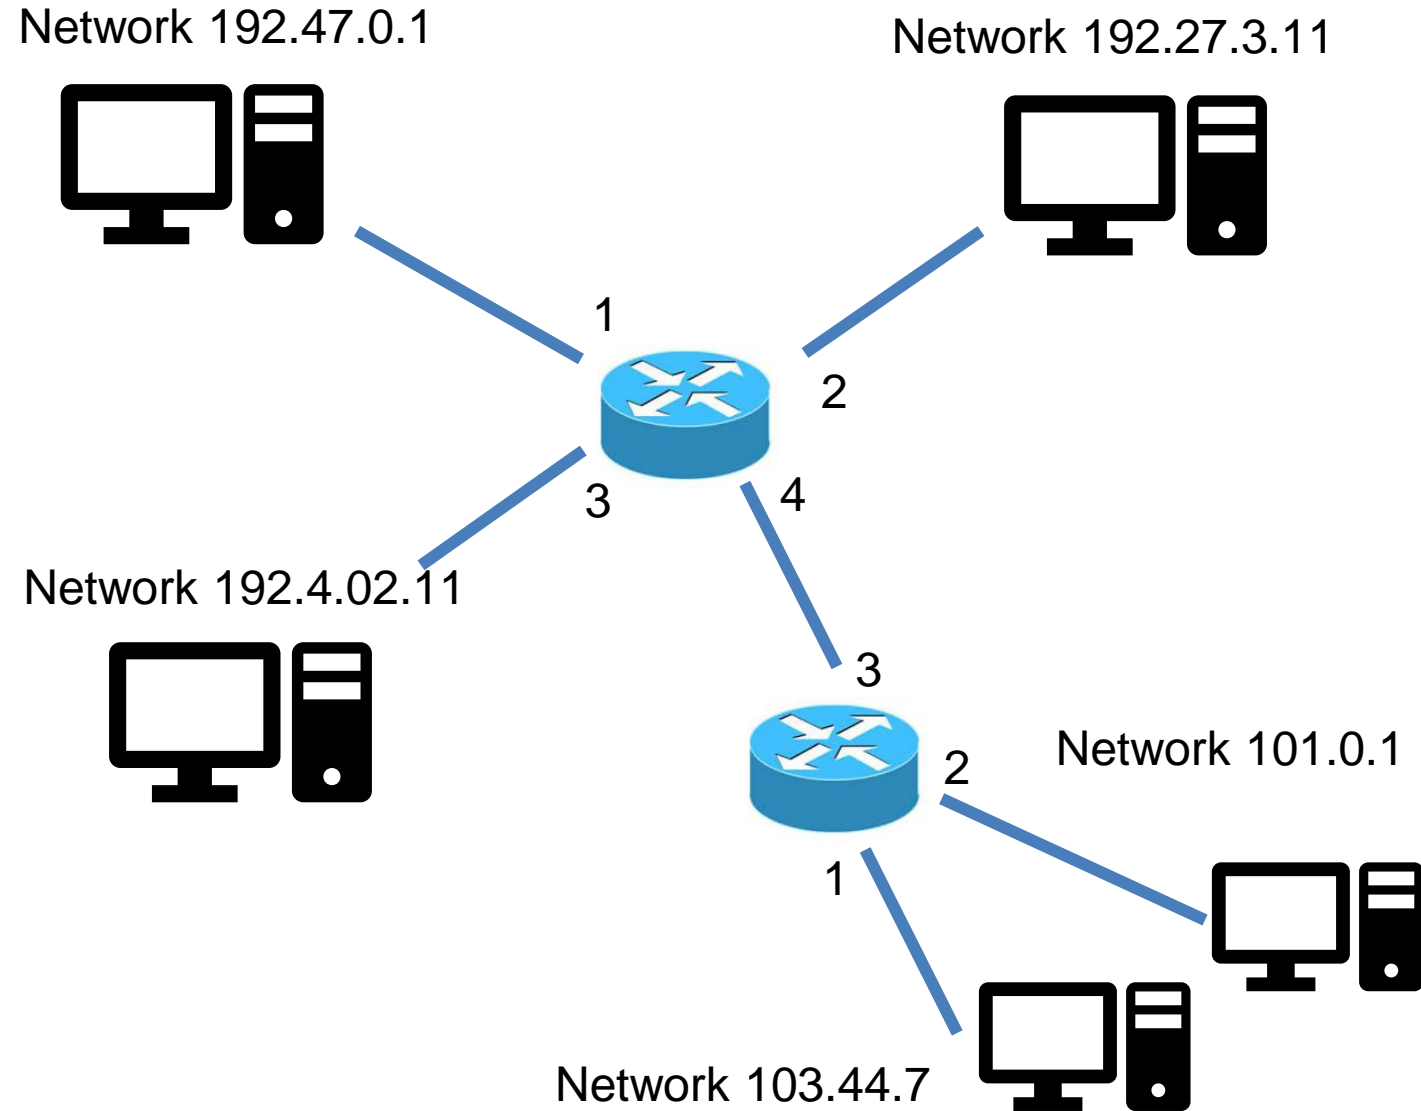





# Data Forwarding

## Routing Table

Network 192.47.0.1

Network 192.27.3.11

Destination	Interface
Network 192.4.02.11	3
Network 192.47.0.1	1
Network 192.27.3.11	2
Network 101.0.1	4
Network 103.44.7	4

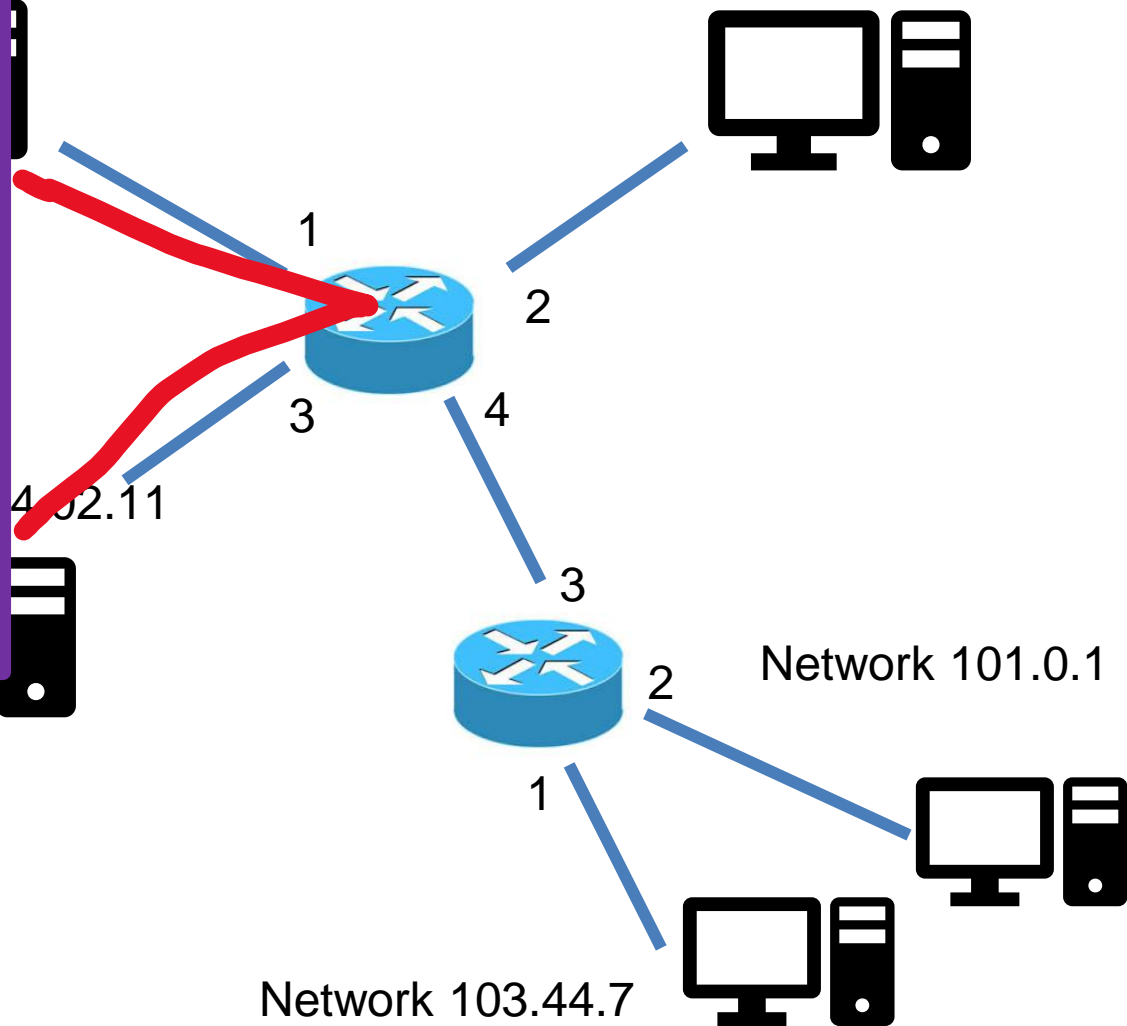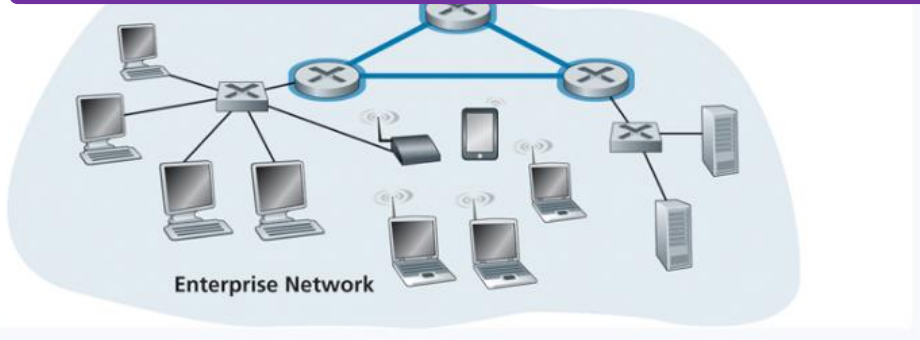

# Data Forwarding



## Routing Table

Network 192.47.0.1

Network 192.27.3.11

Destination	Interface
Network 192.4.02.11	3
Network 192.47.0.1	1
Network 192.27.3.11	2
Network 101.0.1	4
Network 103.44.7	4


We will discuss how these tables are populated in several weeks

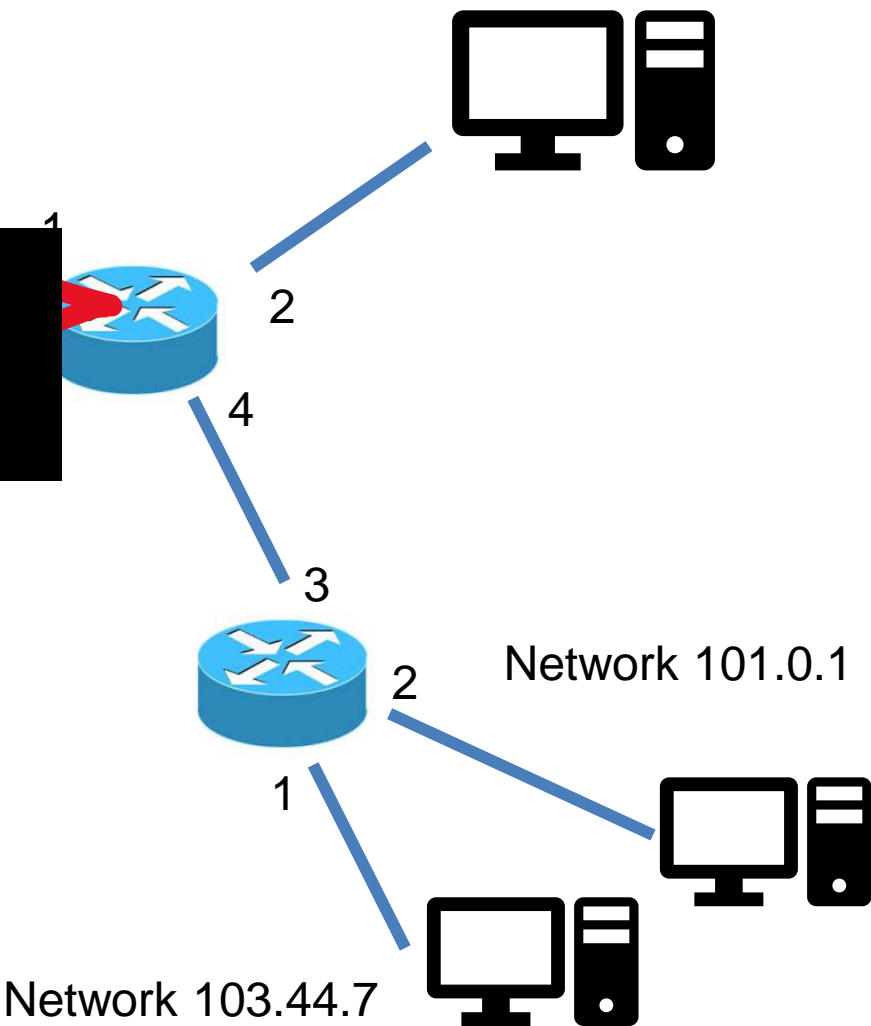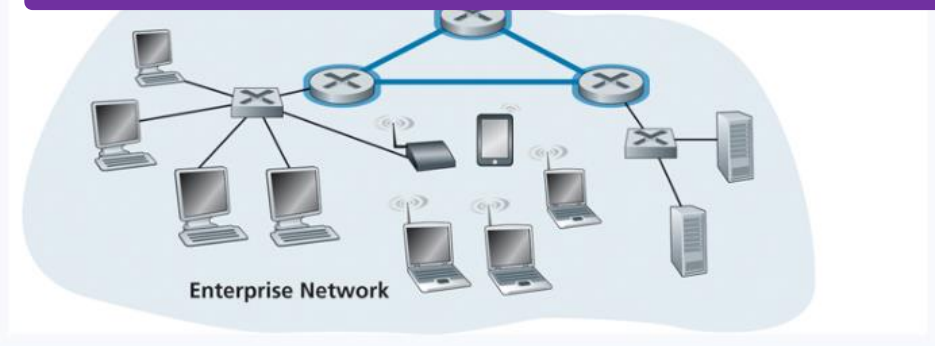

# Data Forwarding

In circuit switching, the path and resources for transmitting from A to B is **reserved**


Communication links are divided into **circuits**, which allow for concurrent usage of the link

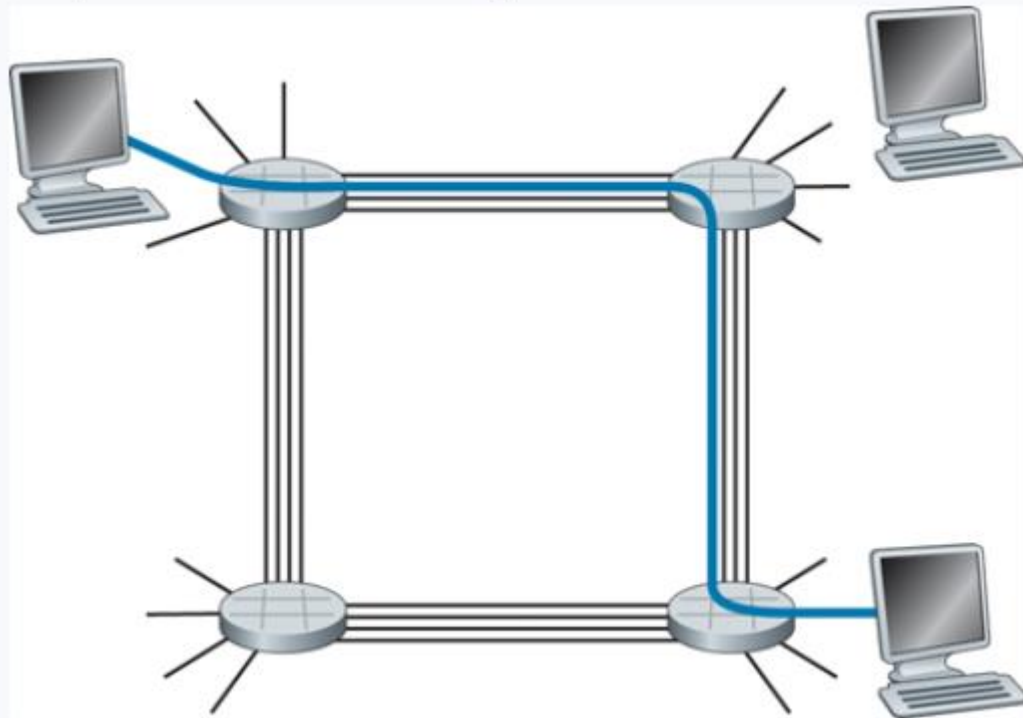

# Data Forwarding

In circuit switching, the path and resources for transmitting from A to B is **reserved**

Communication links are divided into **circuits**, which allow for concurrent usage of the link

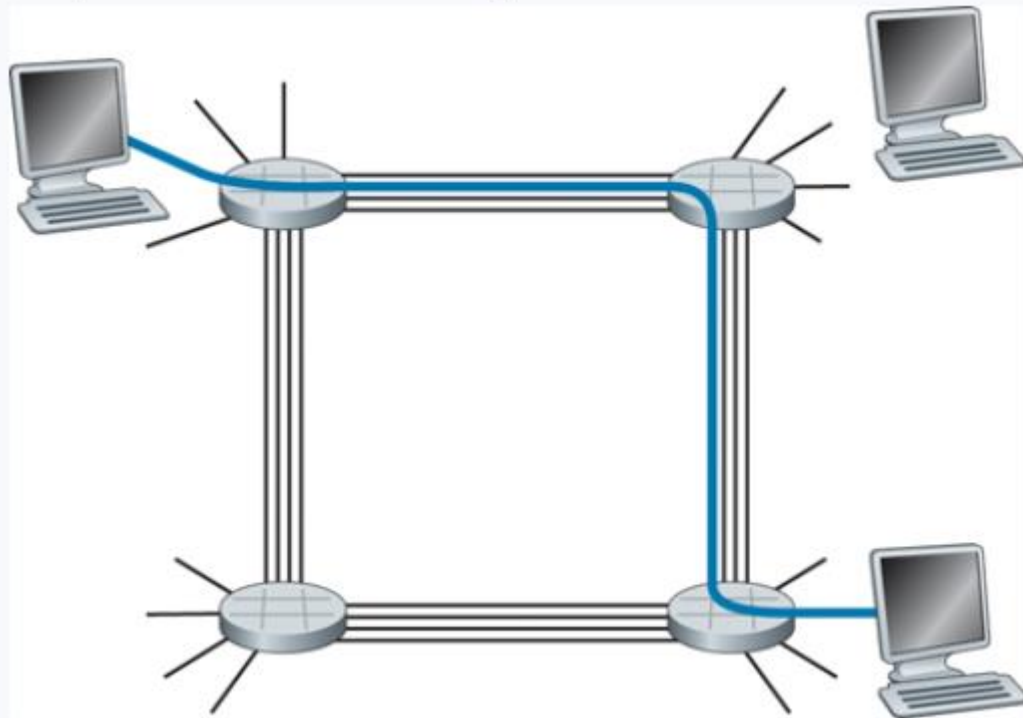


Reserved spaces that are not in use result in **silent periods**



# How are links “reserved” ?

## Circuit switching: FDM and TDM

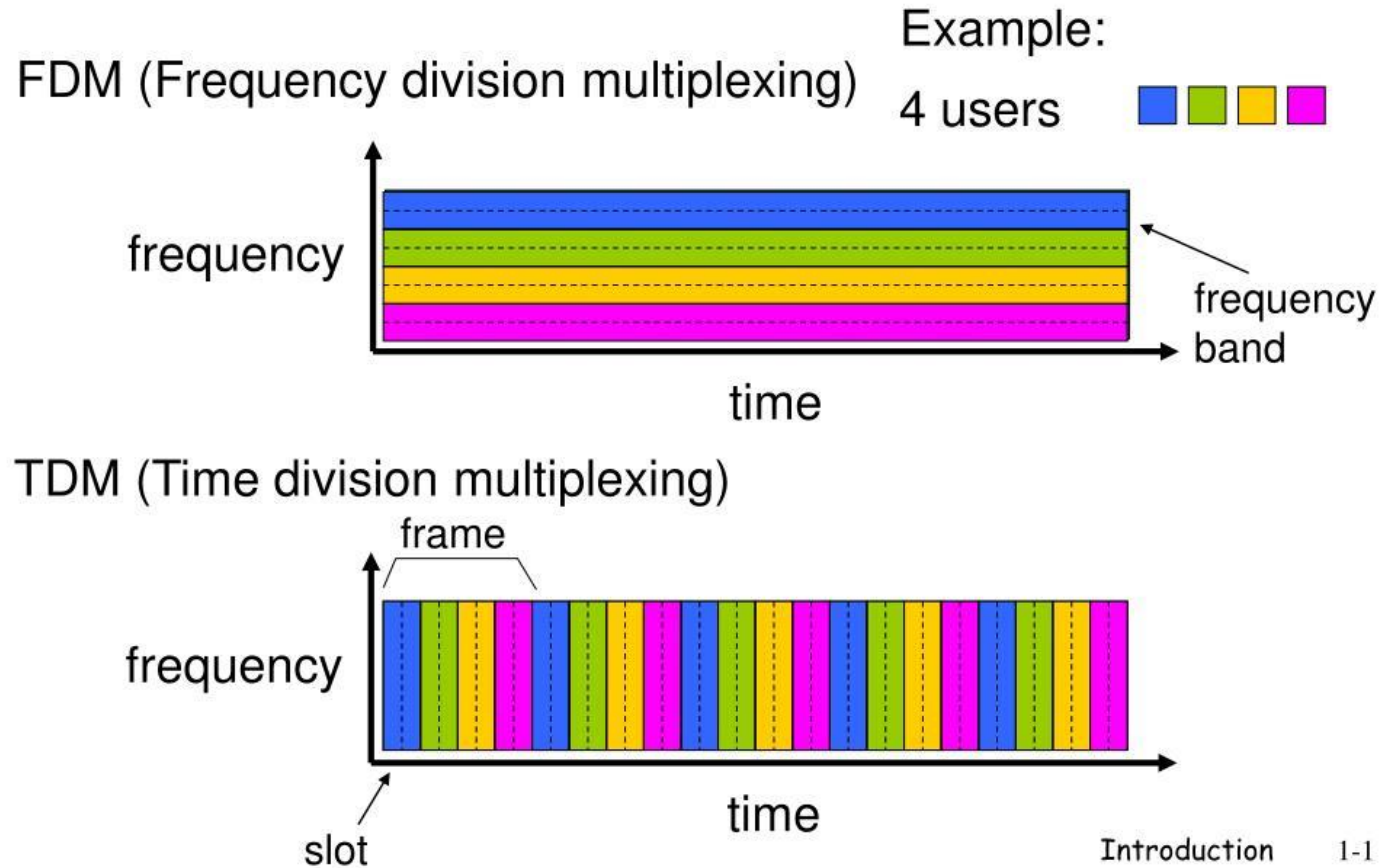

# Traceroute

Network diagnostic tool that displays route taken to destination and RTT for each hop

```
C:\Users\Reese Pearsall>tracert google.com

Tracing route to google.com [172.217.14.238]
over a maximum of 30 hops:

  1  <1 ms    <1 ms    <1 ms    gateway119.254.msu.montana.edu [153.90.119.254]
  2  *         *         *         Request timed out.
  3  *         *         *         Request timed out.
  4  <1 ms    <1 ms    <1 ms    153.90.125.254
  5  <1 ms    <1 ms    <1 ms    10.196.6.10
  6   1 ms    1 ms     <1 ms    rnedge-prodfw.msu.montana.edu [192.105.205.131]
  7  15 ms    15 ms    16 ms    ae13--538.icar-sttl1-2.infra.pnw-gigapop.net [209.124.190.212]
  8  15 ms    15 ms    15 ms    209.124.190.202
  9  17 ms    17 ms    17 ms    142.251.70.99
 10  16 ms    16 ms    16 ms    209.85.254.247
 11  15 ms    15 ms    15 ms    sea30s02-in-f14.1e100.net [172.217.14.238]

Trace complete.
```

# Traceroute

Network diagnostic tool that displays route taken to destination and RTT for each hop

Hop #

RTT time for each packet

Destination

```
C:\Users\Reese Pearsall>tracert google.com

Tracing route to google.com [172.217.14.238]
over a maximum of 30 hops:

  1  <1 ms  <1 ms  <1 ms  gateway119.254.msu.montana.edu [153.90.119.254]
  2  *      *      *      Request timed out.
  3  *      *      *      Request timed out.
  4  <1 ms  <1 ms  <1 ms  153.90.125.254
  5  <1 ms  <1 ms  <1 ms  10.196.6.10
  6   1 ms   1 ms  <1 ms  rnedge-prodfw.msu.montana.edu [192.105.205.131]
  7  15 ms  15 ms  16 ms  ae13--538.icar-stt11-2.infra.pnw-gigapop.net [209.124.190.212]
  8  15 ms  15 ms  15 ms  209.124.190.202
  9  17 ms  17 ms  17 ms  142.251.70.99
 10  16 ms  16 ms  16 ms  209.85.254.247
 11  15 ms  15 ms  15 ms  sea30s02-in-f14.1e100.net [172.217.14.238]

Trace complete.
```

# Traceroute

Network diagnostic tool that displays route taken to destination and RTT for each hop

Hop #

RTT time for each packet

Destination

```
C:\Users\Reese Pearsall>tracert google.com

Tracing route to google.com [172.217.14.238]
over a maximum of 30 hops:

  1  <1 ms  <1 ms  <1 ms  gateway119.254.msu.montana.edu [153.90.119.254]
  2  *      *      *      Request timed out.
  3  *      *      *      Request timed out.
  4  <1 ms  <1 ms  <1 ms  153.90.125.254
  5  <1 ms  <1 ms  <1 ms  10.196.6.10
  6  1 ms   1 ms   <1 ms  rnedge-prodfw.msu.montana.edu [192.105.205.131]
  7  15 ms  15 ms  16 ms  ae13--538.icar-stt11-2.infra.pnw-gigapop.net [209.124.190.212]
  8  15 ms  15 ms  15 ms  209.124.190.202
  9  17 ms  17 ms  17 ms  142.251.70.99
 10  16 ms  16 ms  16 ms  209.85.254.247
 11  15 ms  15 ms  15 ms  sea30s02-in-f14.1e100.net [172.217.14.238]

Trace complete.
```

**whois-** provides registration data of a domain or IP address

172.217.14.238 address profil

Whois	
Diagnostics	
IP Whois	
NetRange:	172.217.0.0 - 172.217.255.255
CIDR:	172.217.0.0/16
NetName:	GOOGLE
NetHandle:	NET-172-217-0-1
Parent:	NET172 (NET-172-0-0-0)
NetType:	Direct Allocation
OriginAS:	AS15169
Organization:	Google LLC (GOGL)
RegDate:	2012-04-16
Updated:	2012-04-16
Ref:	https://rdap.arin.net/registry/ip/172.217.0.0
OrgName:	Google LLC
OrgId:	GOGL
Address:	1600 Amphitheatre Parkway

# Traceroute

Network diagnostic tool that displays route taken to destination and RTT for each hop

Hop #

RTT time for each packet

Destination

```
C:\Users\Reese Pearsall>tracert google.com

Tracing route to google.com [172.217.14.238]
over a maximum of 30 hops:

  1  <1 ms  <1 ms  <1 ms  gateway119.254.msu.montana.edu [153.90.119.254]
  2  *      *      *      Request timed out.
  3  *      *      *      Request timed out.
  4  <1 ms  <1 ms  <1 ms  153.90.125.254
  5  <1 ms  <1 ms  <1 ms  10.196.6.10
  6  1 ms   1 ms   <1 ms  rnedge-prodfw.msu.montana.edu [192.105.205.131]
  7  15 ms  15 ms  16 ms  ae13--538.icar-stt11-2.infra.pnw-gigapop.net [209.124.190.212]
  8  15 ms  15 ms  15 ms  209.124.190.202
  9  17 ms  17 ms  17 ms  142.251.70.99
 10  16 ms  16 ms  16 ms  209.85.254.247
 11  15 ms  15 ms  15 ms  sea30s02-in-f14.1e100.net [172.217.14.238]

Trace complete.
```

**whois-** provides registration data of a domain or IP address

172.217.14.238 address profil

WhoisDiagnostics

IP Whois

NetRange:172.217.0.0 - 172.217.255.255

CIDR:172.217.0.0/16

NetName:GOOGLE

NetHandle:NET-172-217-0-1

Parent:NET172 (NET-172-0-0-0)

NetType:Direct Allocation

OriginAS:AS15169

Organization:Google LLC (GOGL)

RegDate:2012-04-16

Updated:2012-04-16

Ref:https://rdap.arin.net/registry/ip/172.217.0.0

OrgName:Google LLC

OrgId:GOGL

Address:1600 Amphitheatre Parkway

# Traceroute

Network diagnostic tool that displays route taken to destination and RTT for each hop

Hop #

RTT time for each packet

Destination

```
C:\Users\Reese Pearsall>tracert google.com

Tracing route to google.com [172.217.14.238]
over a maximum of 30 hops:

  1  <1 ms  <1 ms  <1 ms  gateway119.254.msu.montana.edu [153.90.119.254]
  2  *      *      *      Request timed out.
  3  *      *      *      Request timed out.
  4  <1 ms  <1 ms  <1 ms  153.90.125.254
  5  <1 ms  <1 ms  <1 ms  10.196.6.10
  6  1 ms   1 ms   <1 ms  rnedge-prodfw.msu.montana.edu [192.105.205.131]
  7  15 ms  15 ms  16 ms  ae13--538.icar-stt11-2.infra.pnw-gigapop.net [209.124.190.212]
  8  15 ms  15 ms  15 ms  209.124.190.202
  9  17 ms  17 ms  17 ms  142.251.70.99
 10  16 ms  16 ms  16 ms  209.85.254.247
 11  15 ms  15 ms  15 ms  sea30s02-in-f14.1e100.net [172.217.14.238]

Trace complete.
```

**whois**- provides registration data of a domain or IP address

153.90.119.254 address pro

Whois   Diagnostics

IP Whois

NetRange: 153.90.0.0 - 153.90.255.255

CIDR: 153.90.0.0/16

NetName: MSU

NetHandle: NET-153-90-0-0-1

Parent: APNIC-ERX-153 (NET-153-0-0-0-0)

NetType: Direct Allocation

OriginAS: AS13476

Organization: Montana State University (MSU-2-Z)

RegDate: 1991-09-23

Updated: 2021-12-14

Ref: https://rdap.arin.net/registry/ip/153.90.0.0

OrgName: Montana State University

OrgId: MSU-2-Z

Address: Information Technology Center

Address: P. O. Box 173240

City: Bozeman