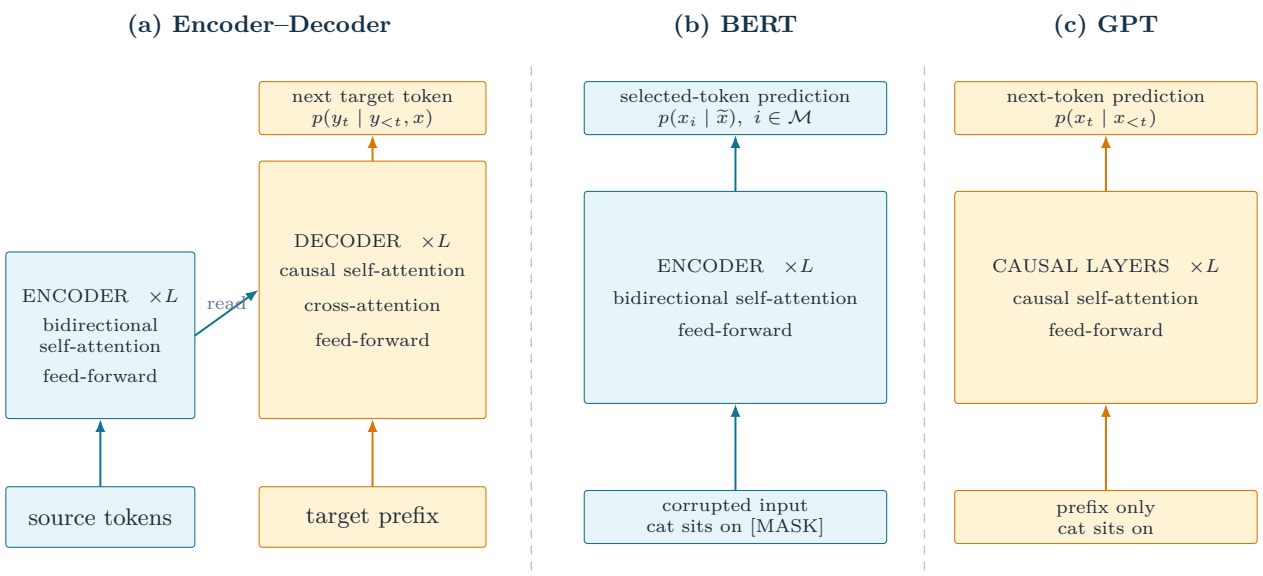
(a) Encoder–Decoder
(b) BERT
(c) GPT
next target token
$p(y_t \mid y_{<t}, x)$
DECODER $\times L$
causal self-attention
cross-attention
feed-forward
ENCODER $\times L$
bidirectional
self-attention
feed-forward
read
source tokens
target prefix
selected-token prediction
$p(x_i \mid \tilde{x}),\ i \in \mathcal{M}$
ENCODER $\times L$
bidirectional self-attention
feed-forward
corrupted input
cat sits on [MASK]
next-token prediction
$p(x_t \mid x_{<t})$
CAUSAL LAYERS $\times L$
causal self-attention
feed-forward
prefix only
cat sits on