

## Manuelle Generierung GET URL

sendRequestWithCustomData

event: Event

input: HTMLCollectionOf<HTMLInputElement>  
getString: String = "2"  
address: String = "https://fallerr.herokuapp.com/"

let i: number = 0

[ i < input.length ]

[ input[i].value != ""  
& value != "0" ]

getString += input[i].name + "="  
+ input[i].value + "&"


i++

let xhr: XMLHttpRequest = new XMLHttpRequest()


xhr.open("GET", address, getString, true)  
xhr.addEventListener  
(readystatechange, handleStateChange)  
xhr.send

## Ablauf Generierung Serverantwort

Server.ts:

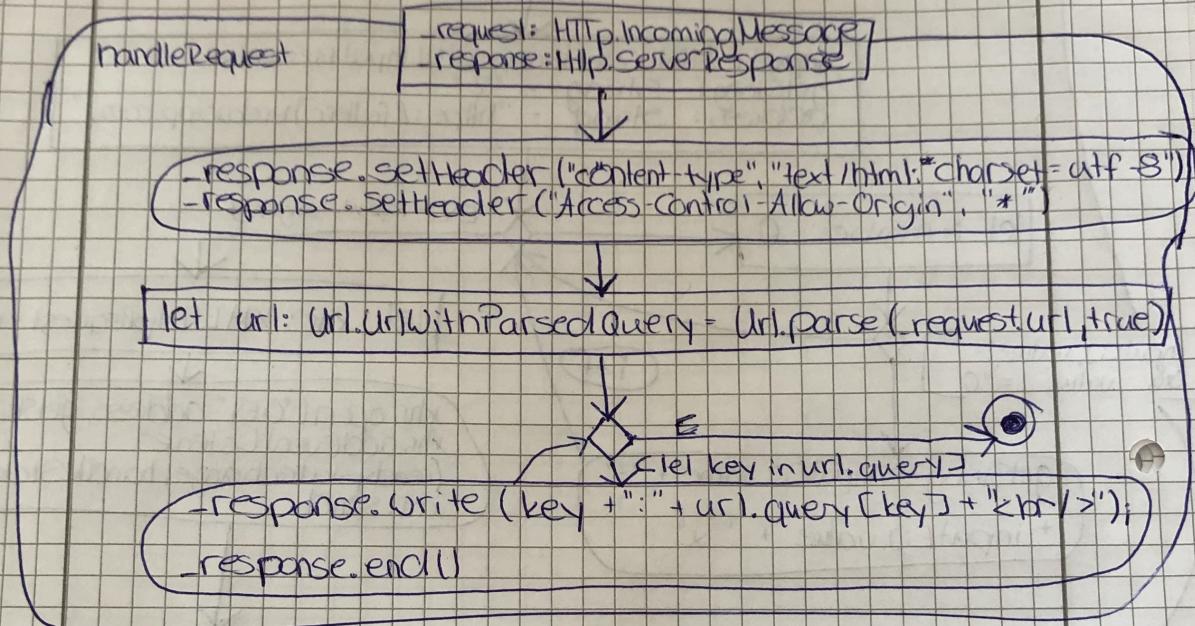

sendData.ts

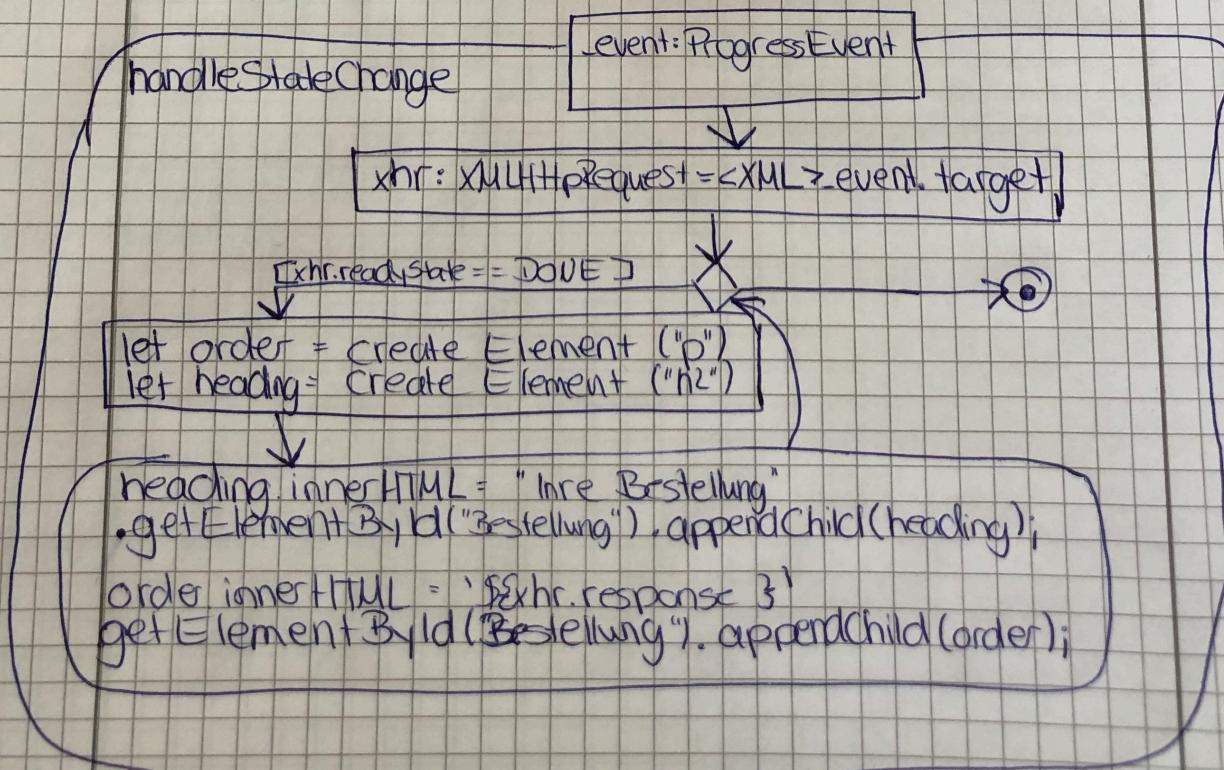

# Eisdealer

## Skizze Task 7

Ihre Bestellung: -> m

- 1 Kugel Schoko -> <p>
- In Waffel -> <p>
- Schokosauce -> <p>

Lieferadresse: -> h2

Wiesenstraße 37 -> <p>

78120 Tuttlingen -> <p>

Regina Faller -> <p>

div