
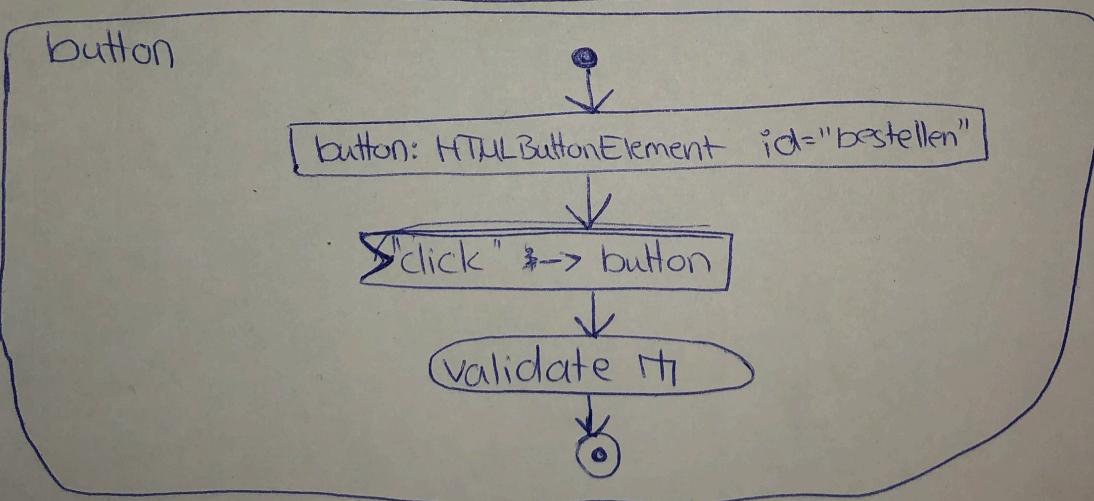


$n:\text{number} = 0$

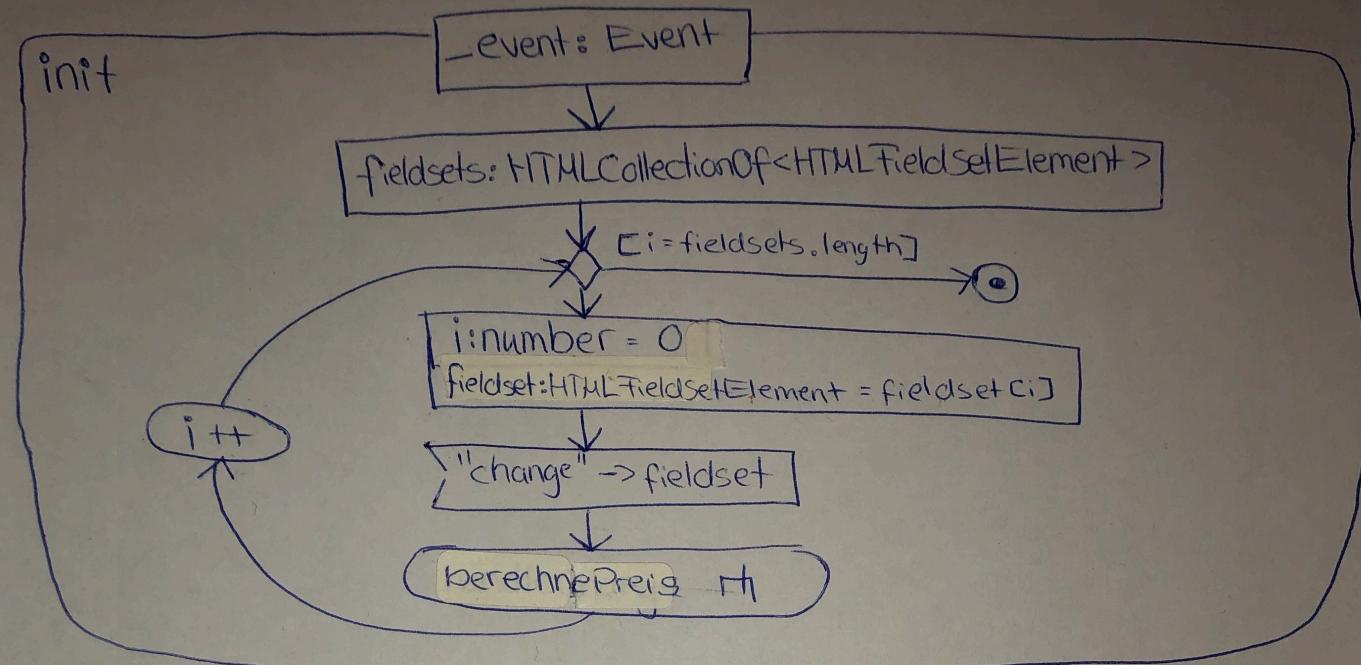

berechnePreis

- event: Event

n = 0

getElementById "Bestellung".innerHTML = ""

input: HTMLCollectionOf<HTMLInputElement>

i: number = 0

[i < input.length]

getElementsById "price".innerHTML = n.toString()

i++

[input[i].name == "Sauce"]

stellungSlider: number = input[i].value
preisSlider: number = - input[i].id

n += stellungSlider * preisSlider

[stellungSlider > 0]

bezeichnung = createElement "li"

bezeichnung.innerHTML = '<p> class </p>'

getElementsById "Bestellung".appendChild (bezeichnung)

i++

