```
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$ git config init.defaultBranch
master
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$ git config --global init.defaultBranch main
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$ git config init.defaultBranch
main
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$ git config --global --list
user.email=reginaldodeoliveirademello@gmail.com
user.name=@regix2003
user.password=regix.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
init.defaultbranch=main
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$
```


1 - No git bash dentro da pasta selecionada:

```
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$ mkdir dio-resumo-git-e-github
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git
$ cd dio-resumo-git-e-github/
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github
$ git init
Initialized empty Git repository in E:/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-
git-e-github/.git/
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git status
On branch main
No commits yet
nothing to commit (create/copy files and use "git add" to track)
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
Š
```

1.1 - Ainda no git bash:

```
regin@DESKTOP-9KNG719 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ touch README.md
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git add README.md
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git status
On branch main
No commits yet
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:
                    README.md
Untracked files:
  (use "git add <file>..." to include in what will be committed)
```

2 - Site: readme.so

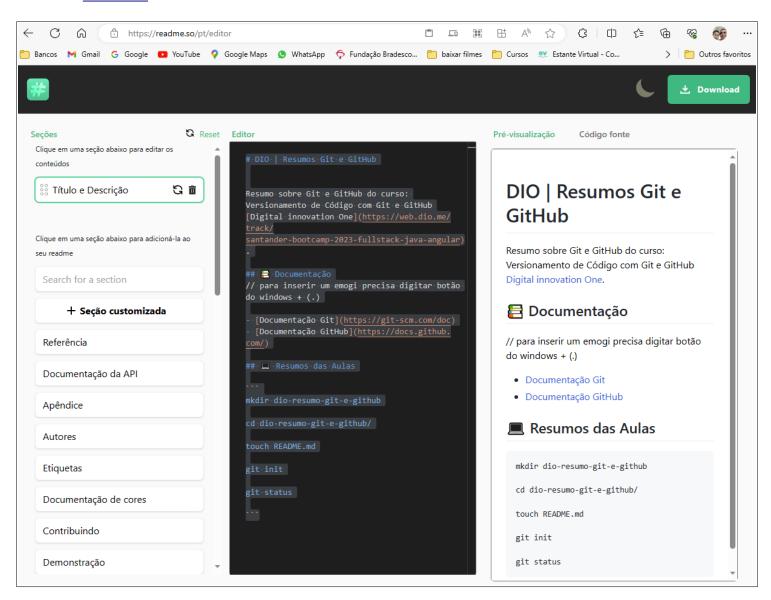

3 - No git bash: (precisei tirar os espaços no nome do arquivo .odt)

```
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
rgithub (main)
$ git add README.md
```

```
regin@DESKTOP-9KNG719 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git status
On branch main
No commits yet
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file:
                    README.md
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        Git_config-git_resumo.odt
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git add Git_config-git_resumo.odt
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git add Git_config-git_resumo.odt
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git status
On branch main
No commits yet
Changes to be committed:
  (use "git rm --cached <file>..." to unstage)
        new file: Git_config-git_resumo.odt
        new file:
                    README.md
regin@DESKTOP-9KNG719 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
```


```
regin@DESKTOP-9KNG719 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git commit -m "commit inicial"
[main (root-commit) c9a3e26] commit inicial
 2 files changed, 26 insertions(+)
 create mode 100644 Git_config-git_resumo.odt
 create mode 100644 README.md
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git log
commit c9a3e263ddd8a9d200f2643b918c21f5f6cb7d03 (HEAD -> main)
Author: @regix2003 <reginaldodeoliveirademello@gmail.com>
       Sun Sep 3 18:41:21 2023 -0300
    commit inicial
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$
```

4 - gitignore

// criar uma pasta chamada resumos, dentro da pasta cria um outro arquivo chamada resumoauloa1.md

// para colocar esta pasta dentro do gitignore: echo resumos/ > .gitignore

5 - No site gitHub criar novo repositório: dio-resumos-git-e-github

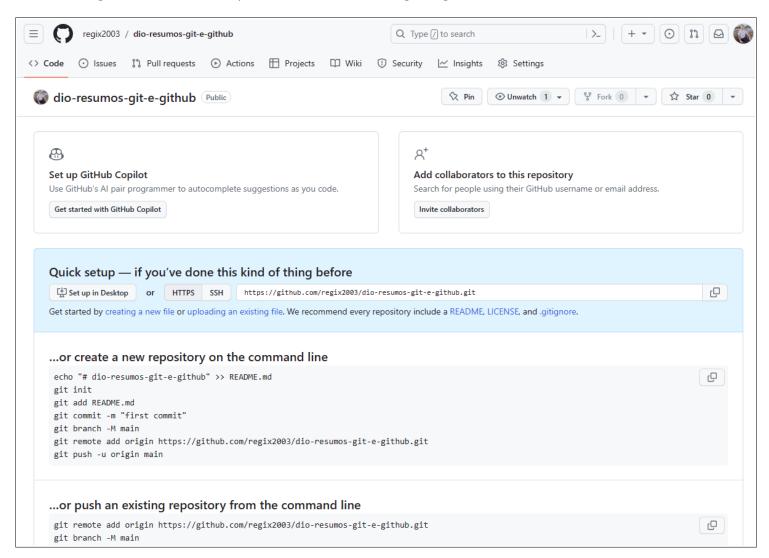

6 - No git bash dar o comando: git remote add origin https://github.com/regix2003/dio-resumos-git-e-github.git

```
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-
github (main)
$ git remote add origin https://github.com/regix2003/dio-resumos-git-e-github.git
```

7 - Dar o comando: git push -u origin main

```
regin@DESKTOP-9KNG7I9 MINGW64 /e/00 cursos/16 - DIO Santander Full Stack/2 - Git/dio-resumo-git-e-github (main)
$ git push -u origin main
Everything up-to-date
branch 'main' set up to track 'origin/main'.
```