

## PAYLOAD ANALYSIS@EATON

QXtend

1/16/2017

Regoti, Sujata  
@Eaton  
QXtend

1. From payload get end point

```
<qcom:propertyName>EndpointURK</qcom:propertyName>  
  
<qcom:propertyValue>  
http://ascqa.tcc.etn.com:8081/asc1qxi163/services/QdocWebService</qcom:propertyValue>
```

In the above endpoint URI, asc1qxi163 represents asc1 QXtend Inbound. For outbound : asc1qxo163


Use Link : <http://ascqa.tcc.etn.com:8081/asc1qxi163>

2. Get wsaTo Property

```
<ns2:propertyName>wsaTo</ns2:propertyName>  
<ns2:propertyValue urn:services-qad-  
com:aspgqueryqxi</ns2:propertyValue>
```

Here outbound receiver aspgqueryqxi.

3. Open above URI. Go to Configuration->Receivers->Outbound

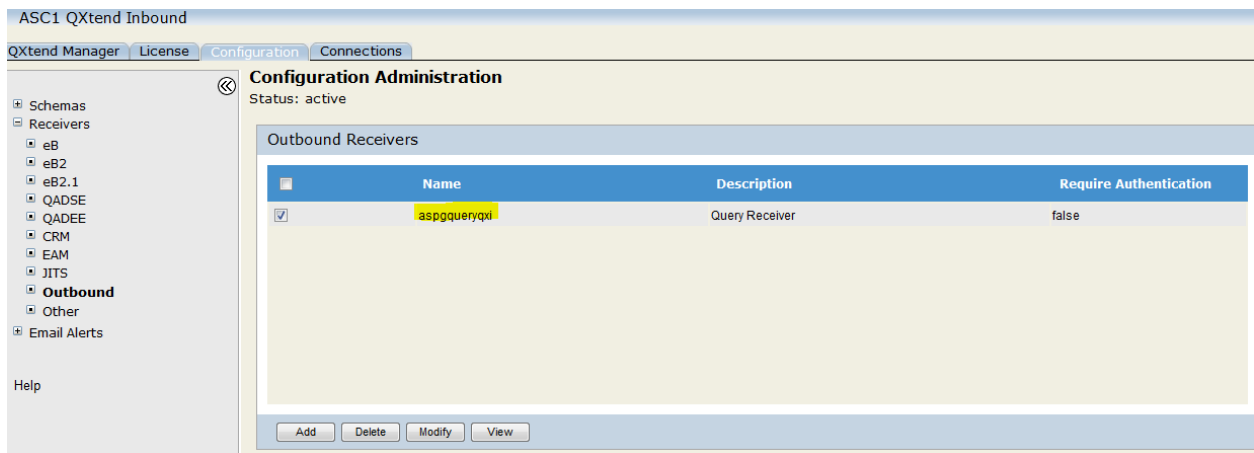


Under receivers find above receiver name.

We can check whether receiver specified in payload is available in Outbound Receiver list or not.

4. If found, Click on View.

<part name="body">

<queryXxMasterComments> → Receiver QDocName

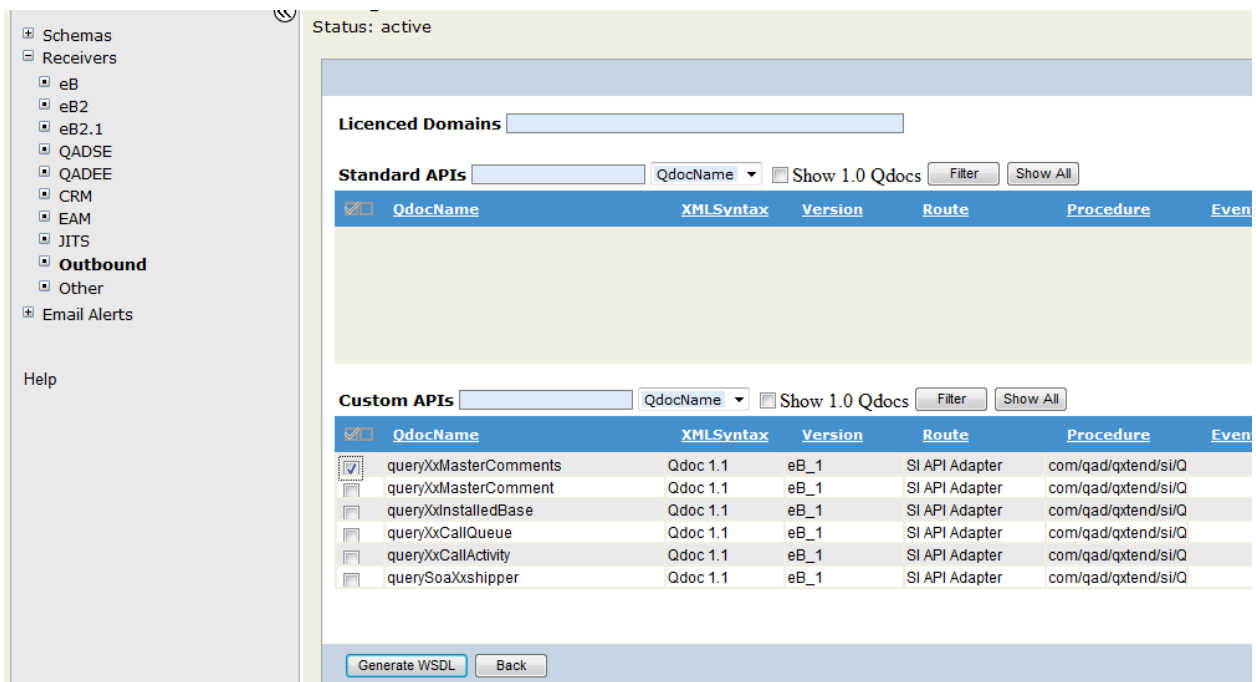


Check Version as specified in payload.

<ns2:propertyName>version</ns2:propertyName>

<ns2:propertyValue>eB\_1</ns2:propertyValue>

5. In outbound, Under Business Object find response provided in payload.

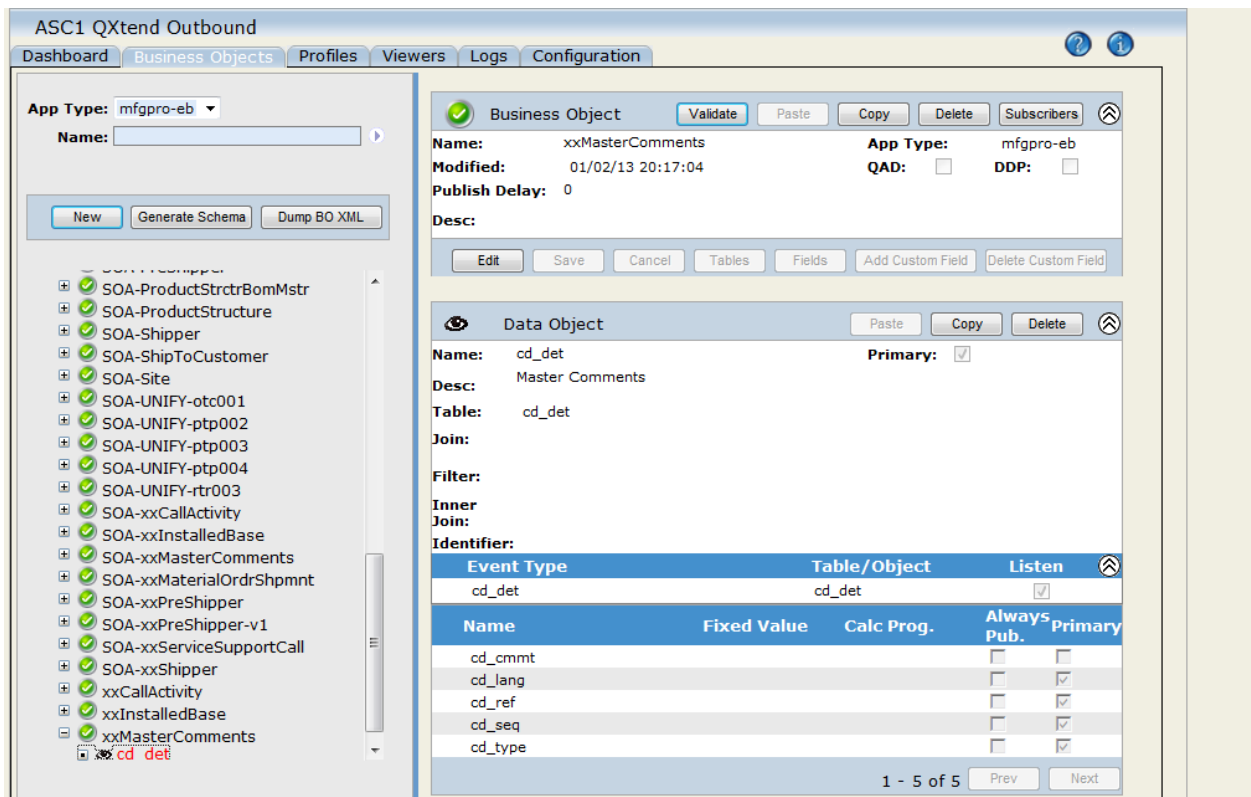

Under Business Object, we get Table and All its fields details.

Regoti, Sujata  
WCE, Sangli Intern@Eaton  
@Eaton