



FEATURES SUMMARY

-- 2 --

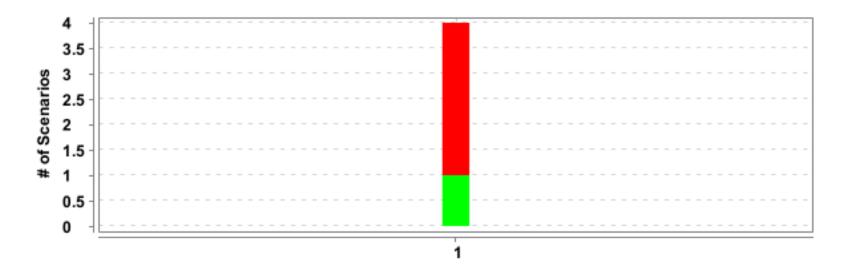

| # | Feature Name | T | P | F | S | Duration |
|---|------------------------|---|---|---|---|--------------|
| 1 | Orange HRM Application | 4 | 1 | 3 | 0 | 1 m 47.440 s |

SCENARIOS SUMMARY

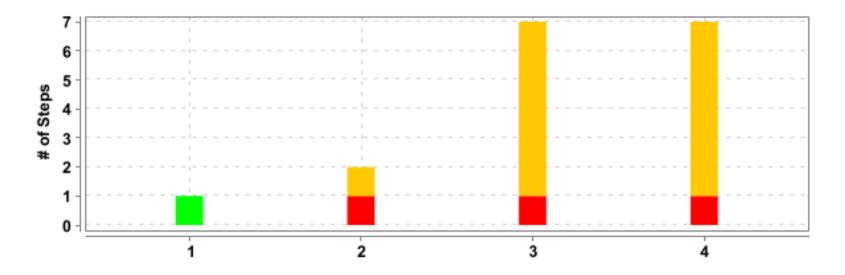

-- 3 --


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|------------------------|-----------------------------|---|---|---|---|--------------|
| 1 | Orange HRM Application | Test browser Functionality | 1 | 1 | 0 | 0 | 13.554 s |
| 2 | Orange HRM Application | Test login fuctionality | 2 | 0 | 1 | 1 | 1 m 33.447 s |
| 3 | Orange HRM Application | test pim page functionality | 7 | 0 | 1 | 6 | 0.245 s |
| 4 | Orange HRM Application | test pim page functionality | 7 | 0 | 1 | 6 | 0.044 s |

DETAILED SECTION -- 4 --

Orange HRM Application


| FAILED DURATION - 1 m 47.44 | Scenarios | | Steps | |
|--------------------------------------|-----------|-----|------------|-------------|
| | Total - 4 | | Total - 17 | |
| / 8:32:27.431 pm // 8:34:14.871 pm / | Pass - 1 | Δ _ | Pass - 1 | 17 |
| | Fail - 3 | | Fail - 3 | '' <i> </i> |
| | Skip - 0 | | Skip - 13 | |

Test browser Functionality

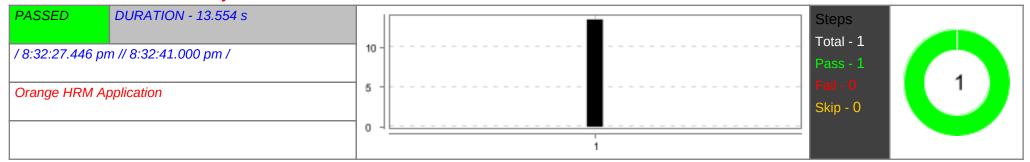

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given user open "Chrome" and enter url | PASSED | 13.510 s |

Test login fuctionality

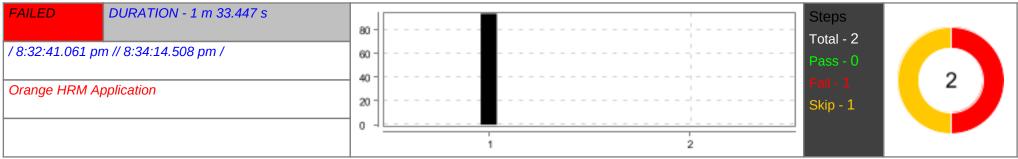


| # | Step / Hook Details | Status | Duration |
|---|--|--------|--------------|
| 1 | When enter valid username and password and click on login button | FAILED | 1 m 33.436 s |
| | Admin admin123 | | |
| | org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //button[text()=' Login ']' (tried for 40 second(s) with 500 milliseconds interval) | | |

| Step / Hook Details | Status | Duration |
|---|--------|----------|
| at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:84) | | |
| at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:230) | | |
| at UtilsLayer.Wait.visibilityStatus(Wait.java:16) | | |
| at UtilsLayer.Wait.click(Wait.java:31) | | |
| at PageLayer.LoginPage.clickOnLoginBtn(LoginPage.java:36) | | |
| at Steps.StepDefination.enter_valid_username_and_password_and_click_on_login_button(StepDefination.java:43) | | |
| at ?.enter valid username and password and click on login button(file:///G:/softech%20class/Backup21oct%20batch/ | | |
| OrangeWithBDDWithALL/AllFeatureFiles/orange.feature:7) | | |
| Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: | | |
| {"method":"xpath","selector":"//button[text()=' Login ']"} (Session info: chrome=120.0.6099.200) For documentation on this error, please visit: | | |
| https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.12.1', revision: | | |
| '8e34639b11' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium. | | |
| chrome.ChromeDriver Command: [fe976454ad1c1eebde77ee42a5b4fce0, findElement {using=xpath, value=//button[text()=' Login ']}] | | |
| Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.200, chrome: {chromedriverVersion: | | |
| 120.0.6099.109 (3419140ab66, userDataDir: C:\Users\HP\AppData\Local\T}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51367}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), | | |
| se:cdp: ws://localhost:51367/devtoo, se:cdpVersion: 120.0.6099.200, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, | | |
| pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, | | |
| webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: | | |
| true} Session ID: fe976454ad1c1eebde77ee42a5b4fce0 | | |
| at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstanceO(Native Method) | | |
| at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) | | |
| at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) | | |
| at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) | | |
| at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) | | |
| at org.openga.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| at jdk.proxy2/jdk.proxy2.\$Proxy21.isDisplayed(Unknown Source) | | |
| at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:304) | | |
| at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:37) | | |
| at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) | | |
| at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) | | |
| at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| | at UtilsLayer.Wait.visibilityStatus(Wait.java:16) | | |
| | at UtilsLayer.Wait.click(Wait.java:31) | | |
| | at PageLayer.LoginPage.clickOnLoginBtn(LoginPage.java:36) | | |
| | at Steps.StepDefination.enter_valid_username_and_password_and_click_on_login_button(StepDefination.java:43) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) | | |
| | at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.base/java.lang.reflect.Method.invoke(Method.java:568) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:73) | | |
| | at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:200) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) | | |
| | at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) | | |
| | at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) | | |
| | at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) | | |
| | at io.cucumber.junit.Cucumber\$RunCucumber.evaluate(Cucumber.java:235) | | |
| | at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:413) | | |
| | at org.eclipse.jdt.internal.junit4.runner.JUnit4TestReference.run(JUnit4TestReference.java:93) | | |
| | at org.eclipse.jdt.internal.junit.runner.TestExecution.run(TestExecution.java:40) | | |

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:529) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.runTests(RemoteTestRunner.java:756) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.run(RemoteTestRunner.java:452) at org.eclipse.jdt.internal.junit.runner.RemoteTestRunner.main(RemoteTestRunner.java:210) * Not displayable characters are replaced by '?'. | | |
| 2 | Then verify home page title and url | SKIPPED | 0.002 s |

test pim page functionality

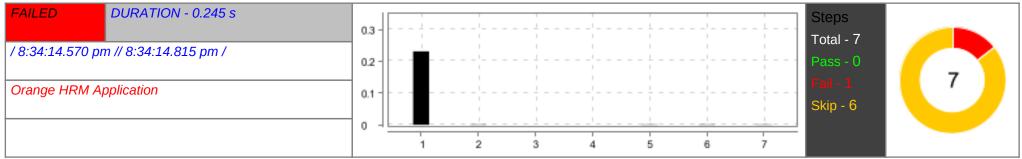


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | When user click on pim link | FAILED | 0.231 s |
| | org.openqa.selenium.InvalidSelectorException: invalid selector: An invalid or illegal selector was specified (Session info: chrome=120.0.6099.200) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#invalid-selector-exception Build info: version: '4.12.1', revision: '8e34639b11' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [fe976454ad1c1eebde77ee42a5b4fce0, findElement {using=name, value=//span[text()=*PIM]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.200, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: C:\USers\HP\AppData\Local\T}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51367}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51367/devtoo, se:cdpVersion: 120.0.6099.200, set\WindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: fe976454ad1c1eebde77ee42a5b4fce0 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:499) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec. | | |

DETAILED SECTION -- 8 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.sexecute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocation.\$ElementFinder\$2.findElement(ElementLocation.java:165) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.Internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy21.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:304) at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:37) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) at OttilsLayer.Wait.visibilityStatus(Wait.java:31) at PageLayer.PIMPage.clickOnPimLink(PIMPage.java:57) at Steps.StepDefination.user_click_on_pim_link(StepDefination.java:60) at ?.user click on pim link(file:///G:/softech%20class/Backup21oct%20batch/OrangeWithBDDWithALL/AllFeatureFiles/orange.feature:12) * Not displayable characters are replaced by '?'. | | |
| 2 | And validiate url | SKIPPED | 0.001 s |
| 3 | And user click on add employee button and enter "Rekha" , "Misal" and click on save button | SKIPPED | 0.000 s |
| 4 | And user capture employee id and click on employee list | SKIPPED | 0.000 s |
| 5 | And enter employee id and click on search button | SKIPPED | 0.001 s |
| 6 | And select the search employee and click on delete | SKIPPED | 0.001 s |
| 7 | And verify employee delete or not | SKIPPED | 0.001 s |

test pim page functionality

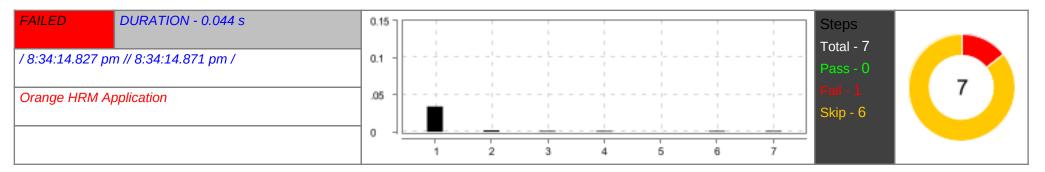

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | When user click on pim link | FAILED | 0.034 s |
| | org.openqa.selenium.InvalidSelectorException: invalid selector: An invalid or illegal selector was specified (Session info: chrome=120.0.6099.200) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#invalid-selector-exception Build info: version: '4.12.1', revision: '8e34639b11' System info: os.name: 'Windows 10', os.arch: 'amd64', os. version: '10.0', java.version: '17.0.7' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [fe976454ad1c1eebde77ee42a5b4fce0, findElement {using=name, value=//span[text()='PIM']}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 120.0.6099.200, chrome: {chromedriverVersion: 120.0.6099.109 (3419140ab66, userDataDir: C:\Users\HP\AppData\Loca\\T}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:51367}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:51367/devtoo, se:cdpVersion: 120.0.6099.200, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: fe976454ad1c1eebde77ee42a5b4fce0 | | |
| | at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openga.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:52) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:359) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:353) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) at jdk.proxy2/jdk.proxy2.\$Proxy21.isDisplayed(Unknown Source) at org.openqa.selenium.support.ui.ExpectedConditions.elementlfVisible(ExpectedConditions.java:304) | | |

DETAILED SECTION -- 10 --

| # | Step / Hook Details | Status | Duration |
|---|--|---------|----------|
| | at org.openqa.selenium.support.ui.ExpectedConditions.access\$000(ExpectedConditions.java:37) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:290) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions\$10.apply(ExpectedConditions.java:287) | | |
| | at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:205) | | |
| | at UtilsLayer.Wait.visibilityStatus(Wait.java:16) | | |
| | at UtilsLayer.Wait.click(Wait.java:31) | | |
| | at PageLayer.PIMPage.clickOnPimLink(PIMPage.java:57) | | |
| | at Steps.StepDefination.user_click_on_pim_link(StepDefination.java:60) | | |
| | at ?.user click on pim link(file:///G:/softech%20class/Backup21oct%20batch/OrangeWithBDDWithALL/AllFeatureFiles/orange.feature:12) | | |
| | * Not displayable characters are replaced by '?'. | | |
| 2 | And validiate url | SKIPPED | 0.002 s |
| | link | | |
| | pim | | |
| 3 | And user click on add employee button and enter "Kavita" , "Misal" and click on save button | SKIPPED | 0.001 s |
| 4 | And user capture employee id and click on employee list | SKIPPED | 0.001 s |
| 5 | And enter employee id and click on search button | SKIPPED | 0.000 s |
| 6 | And select the search employee and click on delete | SKIPPED | 0.001 s |
| 7 | And verify employee delete or not | SKIPPED | 0.001 s |