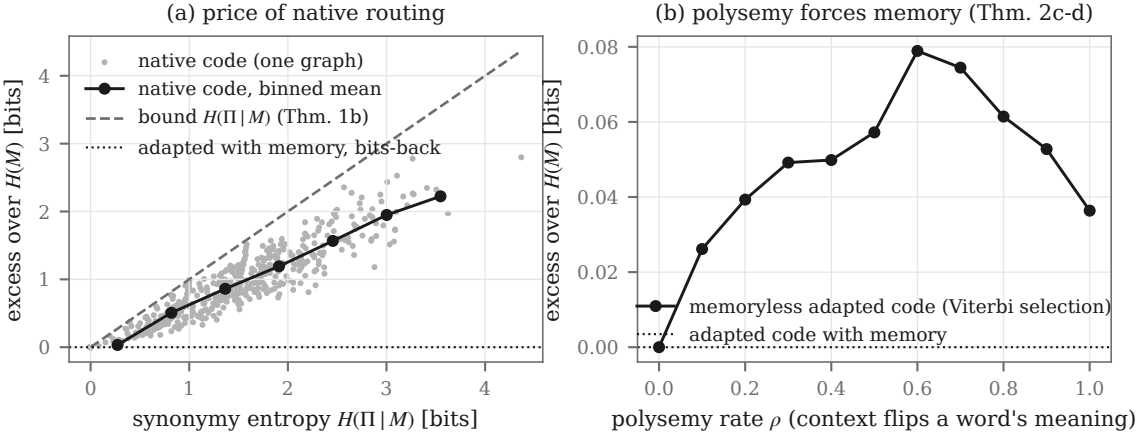
(a) price of native routing
native code (one graph)
native code, binned mean
bound $H(\Pi \mid M)$ (Thm. 1b)
adapted with memory, bits-back
excess over $H(M)$ [bits]
synonymy entropy $H(\Pi \mid M)$ [bits]
0
1
2
3
4
(b) polysemy forces memory (Thm. 2c-d)
memoryless adapted code (Viterbi selection)
adapted code with memory
excess over $H(M)$ [bits]
polysemy rate ρ (context flips a word's meaning)
0.00
0.02
0.04
0.06
0.08
0.0
0.2
0.4
0.6
0.8
1.0