

# Behavioral Analysis of the Agent-Based Community Grid Solution for the Large Hadron Collider beauty Experiment

Daniela Remenska<sup>1,3</sup>, Tim A.C. Willemse<sup>2</sup>, Henri Bal<sup>1</sup>, Kees Verstoep<sup>1</sup>, Wan Fokkink<sup>1</sup>, and Jeff Templon<sup>3</sup>

<sup>1</sup>Dept. of Computer Science, VU University Amsterdam, The Netherlands

<sup>2</sup>Dept. of Computer Science, TU Eindhoven, The Netherlands

<sup>3</sup>NIKHEF, Amsterdam, The Netherlands

**Abstract**—DIRAC (Distributed Infrastructure with Remote Agent Control) is the Grid solution designed to support production activities as well as user data analysis for the Large Hadron Collider beauty experiment. It consists of cooperating distributed services and a plethora of light-weight agents delivering the workload to the Grid resources. Services accept requests from agents and running jobs, while agents actively fulfill specific goals. Services maintain database back-ends to store dynamic state information of entities such as jobs, queues, or staging requests. Agents continuously check for changes in the service states, and react to these accordingly. The logic of each agent is rather simple; the main source of complexity lies in their cooperation. These agents run concurrently, and communicate using the services' databases as a shared memory for synchronizing the state transitions. Despite the effort invested in making DIRAC reliable, entities occasionally get into inconsistent states. Tracing and fixing such behaviors is difficult, given the inherent parallelism among the distributed components and the size of the implementation.

In this paper we present an analysis of DIRAC with mCRL2, process algebra with data. We have reverse engineered two critical and related DIRAC subsystems, and subsequently modeled their behavior with the mCRL2 toolset. This enabled us to easily locate race conditions and livelocks which were confirmed to occur in the real system. We further formalized and verified several behavioral properties of the two modeled subsystems.

**Keywords:** DIRAC, service-oriented architecture, agents, stager, mCRL2, model checking, process algebra

## I. INTRODUCTION

The Large Hadron Collider beauty (LHCb) experiment [1] is one of the four large experiments conducted on the Large Hadron Collider (LHC) accelerator, built by the European Organization for Nuclear Research (CERN). Immense amounts of data are produced at the LHC accelerator, and subsequently processed by physics groups and individuals worldwide. The sheer size of the experiment is the motivation behind the adoption of the Grid computing paradigm. The Grid storage and computing resources for the LHCb experiment are distributed across several institutes in Europe. To cope with the complexity of processing the vast amount of data, a complete Grid solution, called DIRAC (Distributed Infrastructure with Remote Agent Control) [2], [3], has been designed and developed for the LHCb community.

DIRAC forms a layer between the LHCb community of users and the heterogeneous Grid resources, in order to allow for optimal and reliable usage of these resources. It consists of many cooperating distributed services and light-weight agents which deliver workload to the resources. The logic of each individual component is relatively simple; the overall system complexity emerges from the cooperation among them. Namely, these agents run concurrently, and communicate using the services' databases as a shared memory (blackboard paradigm [4]) for synchronizing state transitions of various entities.

Although much effort is invested in making DIRAC reliable, entities occasionally get into inconsistent states, leading to a potential loss of efficiency in both resource usage and manpower. Debugging and fixing the root of such encountered behaviors becomes a formidable mission due to multiple factors: the inherent parallelism present among the system components deployed on different physical machines, the size of the implementation (around 150000 lines of Python code), and the distributed knowledge of different subsystems within the collaboration.

In this paper we propose the use of more rigorous (formal) methods for improving software quality. Model checking [5] is one such technique for analysis of an abstract model of a system, and verification of certain system properties of interest. Unlike conventional testing, it allows full control over the execution of parallel processes and also supports automated exhaustive state-space exploration.

We used the mCRL2 language [6] and toolset [7] to model the behavior of two critical and related DIRAC components: the Workload Management (WMS) and the Storage Management System (SMS). Based on Algebra of Communicating Processes (ACP) [8], mCRL2 is able to deal with generic data types as well as user-defined functions for data transformation. This makes it particularly suitable for modeling the data manipulations made by DIRAC's agents. Visualizing the state space and replaying scenarios with the toolkit's simulator enabled us to gain insight into the system behavior, incrementally improve the model, and to already detect critical race-conditions and livelocks, which were confirmed to occur in

the real system. Some of them were a result of simple coding bugs; others unveiled more elementary design problems. We further formulated, formalized and verified several general and application-specific properties.

The idea of modeling existing systems using formal techniques is as such not new. Earlier studies ([9]–[15]) mostly focused on modeling and verifying hardware or communication protocols, since the formal languages and tools at hand were not sufficiently mature to cope with more complex data-intensive distributed systems. More recently, success stories on modeling real-life concurrent systems with data have been reported ([16]–[20]). In [18] the authors have implemented a tool for automatic translation of the SystemC language into mCRL2 statements. This greatly simplifies the analysis, but has so far been feasible only when the language of implementation is domain-specific, or alternatively, a reasonably small subset of a general-purpose language is considered for translation. The only exception in this respect is the Java Pathfinder tool [19] used to find deadlocks and other behavioral properties in Java software systems developed by NASA.

We believe that the challenges and results of this work are unique in a number of aspects. First, to the best of our knowledge, the code-base and the number of concurrent components engaged in providing DIRACs functionality considerably outnumber previous industrial cases. Second, the choice of Python as implementation platform has lead to prevailing usage of dynamic structures (whose types and sizes are determined at runtime) throughout DIRAC, challenging the transition to an abstract formal representation. We have nevertheless established general guidelines on extracting a model outline from the implementation. Third, analysis of this kind is typically performed after a problem has already surfaced in the real system, as a means to understand the events which lead to it and test for possible solutions. We managed to stumble on an actual bug at the same time it was observed in practice, which increased our confidence in the soundness of the model.

The paper is organized as follows. Section 2 introduces the architecture of DIRAC, focusing on the two subsystems chosen as case studies. Section 3 gives a brief overview of the mCRL2 language, and describes our approach to abstracting and modeling the behavior of these subsystems. Section 4 presents the analysis with the mCRL2 toolset and the issues detected. Section 5 concludes and discusses future work.

## II. DIRAC: A COMMUNITY GRID SOLUTION

### A. Architecture Overview

The development of DIRAC started in 2002 as a system for production of simulation data that would serve to verify theory, aspects of the LHCb detector design, as well as to optimize algorithms. It gradually evolved into a complete community Grid solution for data and job management, based on a general-purpose framework that can be reused by other communities besides LHCb. Today, it covers all major LHCb tasks starting with the raw data transfer from the experiments

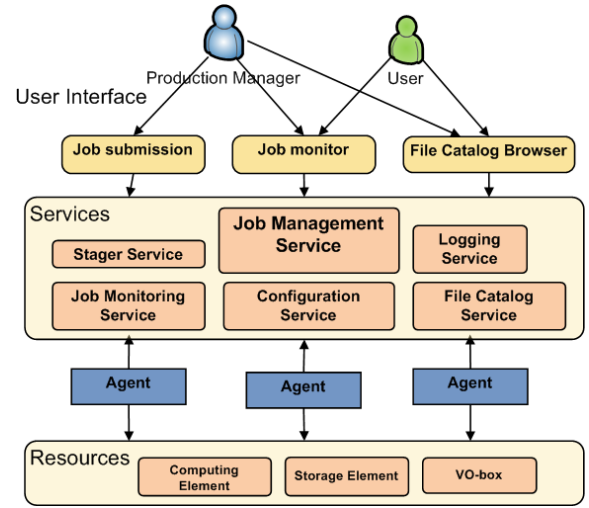


Fig. 1. DIRAC Architecture overview

detector to the Grid storage, several steps of data processing, up to the final user analysis. Python was chosen as the implementation language, since it enables rapid prototyping and development of new features. DIRAC follows the Service Oriented Architecture (SOA) paradigm, accompanied by a network of lightweight distributed agents which animate the system. Its main components are depicted in Fig. 1.

The *services* are passive components that react to requests from their clients, possibly soliciting other services in order to fulfill the requests. They run as permanent processes deployed on a number of high-availability hosts (VO-boxes) at CERN, and persist the dynamic system state information in database repositories. The user interfaces, agents or running jobs can act as clients placing the requests to DIRACs services.

*Agents* are active components that fulfill a limited number of specific system functions. They can run in different environments, depending on their mission. Some are deployed close to the corresponding services, while others run on the Grid worker nodes. Examples of the later are the so-called Pilot Agents, part of the Workload Management System explained in the following section. All DIRAC agents repeat the same logic in each iteration cycle: they observe for changes in the service states, and react accordingly by initiating actions (like job submission or data transfer) which may update the states of various system entities.

*Resources* are software abstractions of the underlying heterogeneous Grid computing and storage resources allocated to LHCb, providing a uniform interface for access. The physical resources are controlled by the site managers and made available through middleware services such as gLite [21].

The DIRAC functionality is exposed to users and developers through a rich set of command-line tools forming the DIRAC API, complemented by a Web portal for visual monitoring the system behavior and controlling the ongoing tasks. Both the Web and command-line *interfaces* ensure secure system access using X509 certificates. In the following, we focus on two related subsystems that are considered critical, yet are the ones

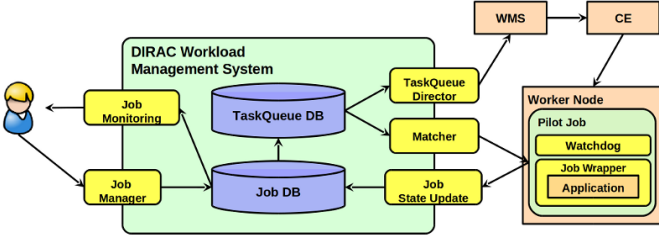


Fig. 2. DIRAC Workload Management System [22]

where problematic state changes are most often encountered, and difficult to trace and correct.

### B. Workload Management System

The driving force of DIRAC is the Workload Management System (WMS). Taking into account that the distributed computing environment is intrinsically unstable, a *Pilot Job paradigm*, illustrated in Fig. 2, was chosen as an efficient way to implement a pull scheduling mechanism. Pilot jobs are simply resource reservation processes without an actual payload defined apriori. They are submitted to the Grid worker nodes with the aim of checking the sanity of the operational environment just before pulling and executing the real payload. This hides the fragility of the underlying resources and increases the job success rate, from the perspective of end users. Centralized *Task Queues* contain all the pending jobs, organized in groups according to their requirements. This enables efficient application of job priorities, enforcing fair-share policies and quotas, which are decided within the LHCb community, without the need of any effort from the Grid sites.

The basic flowchart describing the evolution of a jobs states is depicted in Fig. 3. After submission through the *Job Manager* (“Received”), the complete job description is placed in the DIRAC job repository (the Job DB). Before jobs become eligible for execution, a chain of optimizer agents check and prioritize them in queues, utilizing the

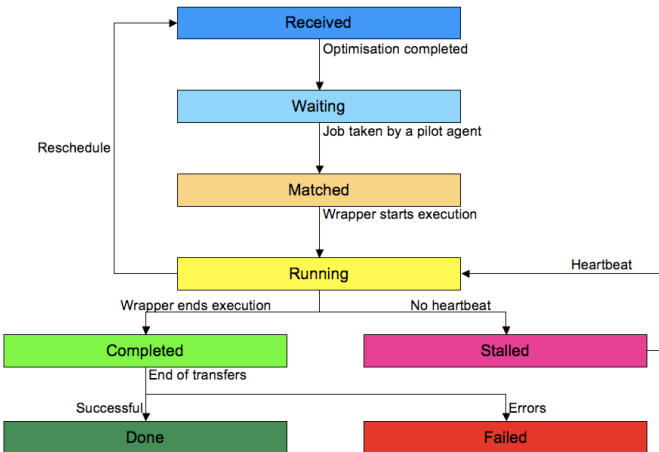


Fig. 3. Job state machine [23]

parameters information from the Job DB. The *Job Sanity Agent* can meaningfully fail jobs with impossible requirements, and prevent unnecessary submission to the Grid resources. The *Input Data Agent* performs a resolution of possible target computing resources based on the input data requirements. If the requested data resides on tape storage, the *Job Scheduling Agent* will pass the control to a specialized *Stager* service (part of the SMS explained in the next section), before placing the job a Task Queue (“Waiting”). Based on the complete list of pending payloads, a specialized *Task Queue Director* submits pilots to the computing resources via the gLite WMS. After a *Matcher* service pulls the most suitable payload for a pilot (“Matched”), a *Job Wrapper* object is created on the worker node, responsible for retrieving the input sandbox, performing software availability checks, executing the actual payload on the worker node (“Running”), and finally uploading any output data necessary (Done or “Failed”). The wrapper can catch any failure exit state reported by the running physics applications. At the same time, a *Watchdog* process is instantiated to monitor the behavior of the Job Wrapper and send heartbeat signals to the monitoring service. It can also take actions in case resources are soon to be exhausted, the payload stalls, or a management command for killing the payload is received.

Although the Grid storage resources are limited, it is essential to keep all data collected throughout the experiments run. Tape backends provide a reliable and cheap solution for data storage. The additional workflow step necessary for input data files residing on tape is carried out inside the Storage Management System (SMS).

### C. Storage Management System

The DIRAC SMS provides the logic for pre-staging files from tape to a disk cache frontend, before a job is able to process them. Smooth functioning of this system is essential for production activities which involve reprocessing of older data with improved physics software, and happens typically several times per year.

A simplified view of the system is shown in Fig. 4. The workflow is initiated with the Job Scheduling agent detecting that a job is assigned to process files only available on tape storage. It sends a request for staging (i.e., creating a cached replica) to the *Storage Manager Handler* service along with the list of files and a callback method to be invoked when the request has been processed. The Storage Management DB is immediately populated with records which are processed by a sequence of agents in an organized fashion. The relevant tables in the SMS DB are the *Tasks* and *CacheReplicas*, whose entities maintain a state observed and updated by these agents. Tasks maintain general information about every job requesting a service from the SMS. The details about every file (i.e., the Storage Element where it resides, the size, checksum, number of tasks that requested it), are kept in the CacheReplicas table. Other auxiliary tables maintain the relationship between these entities.

The processing begins with the *Request Preparation Agent*. It selects all the “New” entries for files, checks whether

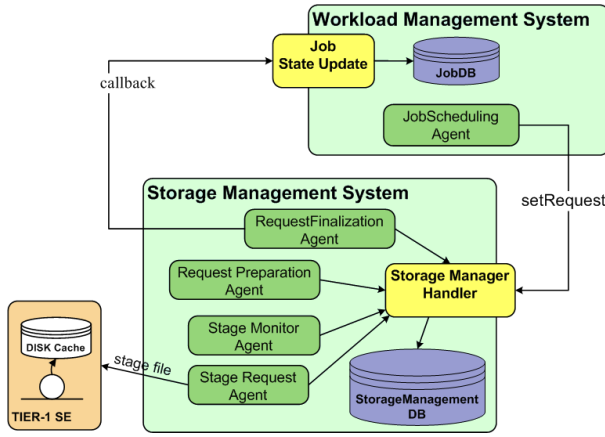


Fig. 4. DIRAC Storage Management System

they are registered in a special Logical File Catalog (LFC), and retrieves their metadata. In case of problematic catalog entries, it can update the status of the CacheReplicas and the related Tasks entries to “Failed”. For non-problematic files it carries out transition to “Waiting”. The *StageRequest Agent* is responsible for placing the actual staging requests for all “Waiting” entries, via dedicated storage middleware that communicates with the tape backends. These requests are grouped by SE prior to submission, and carry information about the requested (pin) lifetime of the replicas to be cached. If certain pathologies are discovered (i.e., lost, unavailable or zero-sized files on tape), it can update the corresponding entries to “Failed” in a similar manner. Otherwise, they are promoted to “StageSubmitted”. The agent responsible for monitoring the status of submitted requests is the *StageMonitor Agent*. It achieves this by interrogating the storage middleware to see if the “StageSubmitted” files are successfully replicated on disk cache. In case of success, the CacheReplicas and their corresponding Tasks entries are updated to “Staged”. Various circumstances of tape or middleware misbehavior can also fail the staging requests. The last one in the chain is the *RequestFinalization Agent*. The tasks which are in their final states (“Staged” or “Failed”) are cleared from the database, and callbacks are performed to the WMS, which effectively wakes up the corresponding jobs. If there are no more associated tasks for particular replicas, the respective CacheReplicas entries are also removed.

This subsystem is still in evolutionary phase. In multiple instances, tasks or replicas have become stuck, effectively blocking the progress of jobs. Tracing back the sequence of events which led to the inconsistent states is non-trivial. To temporarily alleviate such problems, the status of these entries is typically reset to the initial New state manually, so agents can re-process them from scratch. Occasionally, error messages are reported from unsuccessful attempts of the SMS service to update the state of a non-existent table entry.

### III. SYSTEM MODELING

#### A. The mCRL2 language and toolset

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

Nulla malesuada porttitor diam. Donec felis erat, congue non, volutpat at, tincidunt tristique, libero. Vivamus viverra fermentum felis. Donec nonummy pellentesque ante. Phasellus adipiscing semper elit. Proin fermentum massa ac quam. Sed diam turpis, molestie vitae, placerat a, molestie nec, leo. Maecenas lacinia. Nam ipsum ligula, eleifend at, accumsan nec, suscipit a, ipsum. Morbi blandit ligula feugiat magna. Nunc eleifend consequat lorem. Sed lacinia nulla vitae enim. Pellentesque tincidunt purus vel magna. Integer non enim. Praesent euismod nunc eu purus. Donec bibendum quam in tellus. Nullam cursus pulvinar lectus. Donec et mi. Nam vulputate metus eu enim. Vestibulum pellentesque felis eu massa.

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

Fusce mauris. Vestibulum luctus nibh at lectus. Sed bibendum, nulla a faucibus semper, leo velit ultricies tellus, ac venenatis arcu wisi vel nisl. Vestibulum diam. Aliquam pellentesque, augue quis sagittis posuere, turpis lacus congue quam, in hendrerit risus eros eget felis. Maecenas eget erat in sapien mattis porttitor. Vestibulum porttitor. Nulla facilisi. Sed a turpis eu lacus commodo facilisis. Morbi fringilla, wisi in dignissim interdum, justo lectus sagittis dui, et vehicula libero dui cursus dui. Mauris tempor ligula sed lacus. Duis cursus enim ut augue. Cras ac magna. Cras nulla. Nulla egestas. Curabitur a leo. Quisque egestas wisi eget nunc. Nam feugiat lacus vel est. Curabitur consectetur.

Suspendisse vel felis. Ut lorem lorem, interdum eu, tincidunt sit amet, laoreet vitae, arcu. Aenean faucibus pede eu ante. Praesent enim elit, rutrum at, molestie non, nonummy vel, nisl. Ut lectus eros, malesuada sit amet, fermentum eu, sodales cursus, magna. Donec eu purus. Quisque vehicula, urna sed ultricies auctor, pede lorem egestas dui, et convallis elit erat sed nulla. Donec luctus. Curabitur et nunc. Aliquam dolor odio, commodo pretium, ultricies non, pharetra in, velit. Integer arcu est, nonummy in, fermentum faucibus, egestas vel, odio.

## B. From DIRAC to mCRL2

Any formal analysis uses a simplified description of the real system. Even in the best possible scenario, where the target implementation language and the modeling notation are very close ([19], [24]), it is practically impossible to avoid the use of abstraction to create a simplified model. Software implementations are large and often contain many details that can be irrelevant for the intended analysis. Abstraction aims at reducing the program’s state space in order to overcome the resource limitations [25] encountered during model-checking. Furthermore, specification languages describe *what* is being done, abstracting away from the details of *how* things are done. Then, the ultimate question is: *how do we establish correspondence between model and code?*

High-level design documents are a good starting point, but insufficient for building a sound model. In absence of more detailed up-to-date behavioral models, we based our models on the source code and discussions with developers. A popular abstraction technique for identifying code subsets (slices) that (potentially) affect particular variables of interest (slicing criteria) is program slicing [26]. It reduces the behavior of a program by removing control statements and data structures deemed irrelevant for the criteria. Unfortunately, to the best of our knowledge, the only practical applications of automated slicing have been on C/C++ and Java programs ([27]–[29]). Research has not yet matured on this topic for dynamic languages, such as Python. Therefore, we performed the program slicing manually, relying on the Eclipse IDE for reverse-engineering and dependency analysis of the subsystems.

Given the recurrent invalid state transitions of entities within DIRAC, we considered the possible race conditions caused by multiple agents updating the service states to be the target of our analysis. We limit the scope to analysis of the following entities: *Tasks* (SMS), *CacheReplicas* (SMS) and *Jobs* (WMS). This determines our slicing criteria. In the following, we use the SMS as a case study for describing the established modeling guidelines. They can be directly applied to other DIRAC systems. First, the guidelines are informally described, followed by fragments of the mCRL2 model to illustrate the translation.

1) *Control Abstractions*: As already explained, all agents repeat the same logic in every subsequent iteration: first they read some entries of interest from the service database, then they process the cached data, and finally they may write or update entries back, based on decisions from the processing step. They can be naturally modelled as *recursive processes*. Take as an example the code snippet<sup>1</sup> in Listing 3, from the simplest agent: the *Stage Request Agent*. Although much of the code is omitted for clarity, the necessary parts for illustrating the basic idea are kept. The first highlighted statement is the selection of all “New” *CacheReplicas* entries. What follows is retrieval of their metadata from the LFC, external to this subsystem. Subsequently, list and dictionary manipulations are done to group the retrieved data depending on the outcome.

<sup>1</sup>This method is ~100 lines of code in reality

Listing 1. *RequestPreparationAgent.py* code excerpt

---

```
def prepareNewReplicas( self ):
    res = self.getNewReplicas()
    if not res['Value']:
        gLogger.info('There were no New replicas found')
        return res
    [...]
    # Obtain the replicas from the FileCatalog
    res = self.__getFileReplicas( fileSizes.keys() )
    if not res['OK']:
        return res
    failed.update( res['Value']['Failed'] )
    terminal = res['Value']['ZeroReplicas']
    fileReplicas = res['Value']['Replicas']
    [...]
    replicaMetadata = []
    for lfn, requestedSEs in replicas.items():
        lfnReplicas = fileReplicas[lfn]
        for requestedSE, replicaID in requestedSEs.items():
            if not requestedSE in lfnReplicas.keys():
                terminalReplicaIDs[replicaID] = "LFN not
                    registered at requested SE"
                replicas[lfn].pop(requestedSE)
            else:
                replicaMetadata.append((replicaID, lfnReplicas[
                    requestedSE], fileSizes[lfn]))

    # Update the states of the files in the database
    if terminalReplicaIDs:
        gLogger.info('%s replicas are terminally failed.' %
            len( terminalReplicaIDs ) )
        res = self.stagerClient.
            updateReplicaFailure(terminalReplicaIDs)
    if replicaMetadata:
        gLogger.info('%s replica metadata to be updated.' %
            len( replicaMetadata ) )
        # Sets the Status='Waiting' of CacheReplicas records
        # that are OK with catalogue checks
        res = self.stagerClient.
            updateReplicaInformation( replicaMetadata )
    return S_OK()
```

---

Two lists of replica IDs are built before the last step: one for the problematic catalog entries, and one for the successful sanity checks. Finally, the last two highlighted code segments update the states of the corresponding *CacheReplicas* to “Failed” and “Waiting” respectfully.

The logging statements, although critical for operational matters, will not affect the entries’ states, and can be translated to *silent steps* in mCRL2. Furthermore, instead of tracing back and modeling all variables on which the two final lists depend, we can use nondeterminism. It is not known upfront which branch execution will follow for a particular replica, as it depends on external behaviour (i.e. the interactions of the system with its environment) However, by stubbing-out the communication with the LFC and most of the local variable manipulations that follow, and replacing them with a *nondeterministic choice* between the two ultimate state updates, we can include both possibilities in the model behavior, and still preserve correctness. Of course, depending on the context, some variable values cannot be ignored, in which case decisiveness can be added using *if-then-else* mCRL2 statement. All relevant selection and update statements are translated into *parametrized actions*.

2) *Data Abstractions*: The *CacheReplicas* entity contains more information besides the state. Every database entry has a unique identifier, descriptive data such as the SE where it resides, its full path, checksum, timestamps etc. Model



checking can only be performed on closed models, where the domains of all variables are finite. Since we are only interested in state transitions, we can collapse most of this descriptive data, and represent this entity as a *custom sort* in mCRL2:

```
sort CacheReplicas = struct Start?is_start |
                      New?is_new |
                      Waiting?is_waiting |
                      StageSubmitted?is_stageSubmitted |
                      Staged?is_staged |
                      Failed?is_failed |
                      Deleted?is_deleted ;
```

This defines an enumerated data type with all possible states, together with constructor and recognizer functions. The Tasks entity is modeled in the same manner. Lists of these sorts can be easily modeled in mCRL2 as  $List(Tasks)$  and  $List(CacheReplicas)$ . To define the many-to-many relationship between Tasks and CacheReplicas, we join these data elements in a tuple:

```
sort Tuple = struct p(t : Nat, r : Nat, link : Bool)
```

The first two elements are the list positions of the Tasks and CacheReplicas entries, while the last one indicates whether a relation between them exists at a given moment of the system execution. The projections ( $t : Tuple \mapsto Nat$ ,  $r : Tuple \mapsto Nat$ ,  $link : Tuple \mapsto Bool$ ) of the tuple on the individual data types are automatically defined with the above statement.

In reality agents operate on lists of IDs corresponding to the database entries, so functions for transforming items of type  $List(CacheReplicas)$  and  $List(Tasks)$  to a list of identifiers (i.e., positions)  $List(Nat)$  are necessary. One such *functional data transformation* used in the model is the  $t2id : List(Tasks) \times Tasks \mapsto List(Nat)$  function, which, given an existing list of Tasks and a specific Tasks value, returns the list positions matching the value. For example:

```
t2id([New, Staged, Staged, Failed], Staged) → [1, 2]
```

Another example is the  $id2cr : List(Nat) \times List(CacheReplicas) \times CacheReplicas \mapsto List(CacheReplicas)$  function, which can be used to update certain CacheReplicas list entries with a new value, in the following way:

```
id2cr([0, 1], [Waiting, Staged, New], Failed) →
[Failed, Failed, New]
```

These data transformations provide a natural way of modeling the actual database operations.

The mCRL2 language does not allow global variables (or a similar construct). Therefore, the shared database is modeled as a parametrized wrapper process that keeps the entries in its local memory, as illustrated below:

```
proc CacheReplicaMem(d:List(CacheReplicas))=
   $\sum_{t:CacheReplicas} RP_{Agent\_selectCacheReplicas\_}(cr2id(d,t),t).$ 
  CacheReplicaMem(d)+
```

```
 $\sum_{l:List(Nat),t:CacheReplicas} RP_{Agent\_prepareNewReplicas\_}(l,t).$ 
  CacheReplicaMem(id2cr(l,d,t))+
  ... +
   $\sum_{l:List(Nat),t:CacheReplicas} RP_{Agent\_removeReplicas\_}(l,t).$ 
  CacheReplicaMem(id2cr(l,d,t))+
  CacheReplicaMem(d);
```

By means of process communication, the shared list of entries can be obtained and changed by the agent processes. The recursive process continuously listens and responds to requests from other processes (agents). The summation operator allows the process to accept any value of the  $CacheReplicas$  and  $List(Nat)$  sort passed by agents. To ensure that such synchronous communication between the memory process and the agents is possible, the mCRL2 *allow* and *comm* constructs are used:

```
 $\Delta\{RP_{Agent\_selectCacheReplicas}, RP_{Agent\_prepareNewReplicas},$ 
 $\dots, RP_{Agent\_removeReplicas}\}$ 
 $\Gamma\{RP_{Agent\_selectCacheReplicas} | RP_{Agent\_selectCacheReplicas\_}$ 
 $\rightarrow RP_{Agent\_selectCacheReplicas},$ 
 $RP_{Agent\_prepareNewReplicas} | RP_{Agent\_prepareNewReplicas\_}$ 
 $\rightarrow RP_{Agent\_prepareNewReplicas}, \dots,$ 
 $RP_{Agent\_removeReplicas} | RP_{Agent\_removeReplicas\_}$ 
 $\rightarrow RP_{Agent\_removeReplicas}\}$ 
```

To complete the picture, we give an outline of the model for the *RequestPreparationAgent*:

```
RP_{Agent}=  $\sum_{cc:List(Nat)} RP_{Agent\_selectCacheReplicas}(cc, New).$ 
  ((cc≠[]) → (RP_{Agent\_prepareNewReplicas}(cc, Failed).
   $\sum_{tt:List(Nat)} RP_{Agent\_selectTaskReplicas}(tt, cc).$ 
  ((tt≠[]) → RP_{Agent\_prepareNewReplicasT}(tt, tFailed)  $\diamond$   $\tau$ ) +
  RP_{Agent\_prepareNewReplicas}(cc, Waiting))  $\diamond$   $\tau$ )
  .RP_{Agent};
```

As it can be seen, the translated process is basically sequences of different actions for communicating with the CacheReplicas memory process. These include obtaining and modifying the data that the memory process maintains. Finally, the model is put together as a parallel composition of all communicating processes, in the *init* part of the specification.

We have established general modeling guidelines and illustrated them on the SMS subsystem. Although the WMS model is larger, it is obtained using the same approach. The complete models are available at [30].

#### IV. ANALYSIS AND ISSUES

The primary purpose of model checking is to prove that the modelled system exhibits certain behavior (requirement), or alternatively, to discover problems. The operation of a model checker closely resembles graph traversal. The nodes of the graph represent the states of the system, while the links connecting them represent transitions, or state changes. The collection of all possible states and transitions forms the state space, or a Labelled Transition System (LTS). Typically, model checkers examine all reachable states and execution paths in a systematic and fully automated manner, to check if

Source	Status	MinorStatus	DateTime
JobSanity	Checking	JobSanity	2011-10-08 20:2
InputData	Checking	InputData	2011-10-08 20:2
BKInputData	Checking	BKInputData	2011-10-08 20:2
JobScheduling	Staging	Request Sent	2011-10-08 20:3
StagerSystem	Checking	JobScheduling	2011-10-08 20:3
JobScheduling	Checking	JobScheduling	2011-10-08 20:3
TaskQueue	Waiting	Pilot Agent Submission	2011-10-08 20:3
Matcher	Matched	Assigned	2011-10-10 16:5
JobAgent@LOG.CNAF.it	Matched	Job Received by Agent	2011-10-10 16:5
JobAgent@LOG.CNAF.it	Matched	Installing Software	2011-10-10 16:5
JobAgent@LOG.CNAF.it	Matched	Submitted To CE	2011-10-10 16:5
JobWrapper	Running	Job Initialization	2011-10-10 16:5
JobWrapper	Running	Downloading InputSandbox	2011-10-10 16:5
JobWrapper	Running	Input Data Resolution	2011-10-10 16:5
StalledJobAgent	Stalled	Input Data Resolution	2011-10-10 17:5
StalledJobAgent	Failed	Job stalled: pilot not running	2011-10-10 18:0
JobWrapper	Running	Application	2011-10-10 23:2
Job_26178809	Running	Application	2011-10-12 04:3
JobWrapper	Completed	Application Finished Successfully	2011-10-12 04:3
JobWrapper	Completed	Uploading Output Sandbox	2011-10-12 04:3
JobWrapper	Completed	Output Sandbox Uploaded	2011-10-12 04:3
JobWrapper	Done	Execution Complete	2011-10-12 04:3

(a) Logging info of a DIRAC job

#	Action	State
3	JobSanityAgent_selectJobs([0], jobstatus...	[jobstatus(Checking, JobSanity)], 1, 2, [0], 1, 1, 1, 1
4	JobSanityAgent_setNextOptimizer([0], jo...	[jobstatus(Checking, InputData)], 1, 1, 1, 1, 1, 1, 1
5	InputDataAgent_selectJobs([0], jobstatus...	[jobstatus(Checking, InputData)], 1, 1, 1, 2, [0], 1, 1
6	InputDataAgent_setNextOptimizer([0], jo...	[jobstatus(Checking, JobScheduling)], 1, 1, 1, 1, 1, 1
7	JobSchedulingAgent_selectJobs([0], jobs...	[jobstatus(Checking, JobScheduling)], 1, 1, 1, 1, 1, 2
8	JobSchedulingAgent_setStagingRequest(...	[jobstatus(Staging, StagingRequestSent)], 1, 1, 1, 1, 1
9	StagerSystem_selectJobs([0], Staging)	[jobstatus(Staging, StagingRequestSent)], 1, 1, 1, 1, 1
10	StagerSystem_updateJobFromStager([0],...	[jobstatus(Checking, JobScheduling)], 1, 1, 1, 1, 1, 1
11	JobSchedulingAgent_selectJobs([0], jobs...	[jobstatus(Checking, JobScheduling)], 1, 1, 1, 1, 1, 2
12	JobSchedulingAgent_sendToTaskQueue([...	[jobstatus(Checking, TaskQueue)], 1, 1, 1, 1, 1, 1, 1
13	TaskQueueAgent_selectJobs([0], jobstatu...	[jobstatus(Checking, TaskQueue)], 1, 1, 1, 1, 1, 1, 2
14	TaskQueueAgent_insertJobInQueue([0], j...	[jobstatus(Waiting, PilotAgentSubmission)], 1, 1, 1, 1, 1
15	JobAgent_selectJobs([0], Waiting)	[jobstatus(Waiting, PilotAgentSubmission)], 1, 1, 1, 1, 1
16	JobAgent_matchJobs([0], jobstatus(Matc...	[jobstatus(Matched, Assigned)], 1, 1, 1, 1, 1, 1, 1
17	JobAgent_updateStatus([0], jobstatus(M...	[jobstatus(Matched, JobReceivedByAgent)], 1, 1, 1, 1, 1
18	JobAgent_submitJob([0], jobstatus(Matc...	[jobstatus(Matched, InstallingSoftware)], 1, 1, 1, 1, 1, 1
19	StalledJobAgent_submitJob([0], jobstatus(Matc...	[jobstatus(Stalled, SubmittedToCE)], 1, 1, 1, 1, 1, 1, 1
20	JobWrapper_initialize([0], jobstatus(Run...	[jobstatus(Running, JobInitialization)], 1, 1, 1, 1, 1, 1, 1
21	JobWrapper_transferInputSandbox([0], j...	[jobstatus(Running, DownloadingInputSandbox)], 1, 1, 1, 1, 1, 1, 1
22	JobWrapper_resolveInputData([0], jobsta...	[jobstatus(Running, InputDataResolution)], 1, 1, 1, 1, 1, 1, 1
23	StalledJobAgent_selectJobs([0], Running)	[jobstatus(Running, InputDataResolution)], 1, 1, 1, 1, 1, 1, 1
24	StalledJobAgent_markStalledJobs([0], St...	[jobstatus(Stalled, InputDataResolution)], 1, 1, 1, 1, 1, 1, 1
25	StalledJobAgent_selectJobs([0], Stalled)	[jobstatus(Stalled, InputDataResolution)], 1, 1, 1, 1, 1, 1, 1
26	StalledJobAgent_failStalledJobs([0], jobs...	[jobstatus(Failed, PilotNotRunning)], 1, 1, 1, 1, 1, 1, 1
27	JobWrapper_execute([0], jobstatus(Runni...	[jobstatus(Running, Application)], 1, 1, 1, 1, 1, 1, 1, 1
28	JobWrapper_execute([0], jobstatus(Com...	[jobstatus(Completed, ApplicationSuccess)], 1, 1, 1, 1, 1, 1, 1
29	JobWrapper_processJobOutputs([0], job...	[jobstatus(Completed, UploadingOutputSandbox)], 1, 1, 1, 1, 1, 1, 1
30	JobWrapper_processJobOutputs([0], job...	[jobstatus(Completed, OutputSandboxUploaded)], 1, 1, 1, 1, 1, 1, 1
31	JobWrapper_processJobOutputs([0], job...	[jobstatus(Completed, UploadingOutputData)], 1, 1, 1, 1, 1, 1, 1
32	JobWrapper_processJobOutputs([0], job...	[jobstatus(Completed, OutputDataUploaded)], 1, 1, 1, 1, 1, 1, 1
33	JobWrapper_finalize([0], jobstatus(Done,...	[jobstatus(Done, ExecutionComplete)], 1, 1, 1, 1, 1, 1, 1

(b) XSim simulator trace

Fig. 5. Invalid job state transitions

a certain property holds. In case of violation of the examined property, a counterexample is provided as a precise trace in the model, showing which interleavings of actions of the parallel components led to the violation.

Besides verification, mCRL2 toolset has a rich set of tools for analysis of the modeled system. The XSim simulator allows to replay scenarios and inspect in details the current state and all possible transitions in the model, for every execution step. This process was already valuable for understanding the system and identifying interesting behaviors that were later included in the requirements. We want to stress that this is especially useful when building models of existing implementations, where at first glance it is not very clear which (un)desired properties need to be formulated and automatically probed, before they actually surface in the real system. One such problematic behavior was recently reported in DIRAC's production (Fig. 5a), where a job had transited between two different terminating states, "Failed" and "Done". Replaying the behavior with XSim revealed the exact same trace in the WMS model (Fig. 5b). This was a result of several (difficult to reproduce in reality) circumstances: The *JobWrapper* process was continuously trying to access a file already migrated to tape. Meanwhile, the *Stalled Job Agent* responsible for monitoring the pilot declared the job as "Stalled", and ultimately as non-responsive ("Failed"), since its child process was busy with data access attempt for a long time. However, once data access succeeded the *JobWrapper* finally started executing the actual payload and reported a "Running" status. The *JobWrapper* typically only reports a different MinorStatus of a job once

TABLE I  
mCRL2 MODEL STATISTICS

System	States	mCRL2 LoC	Python LoC	Generation time
SMS	18417	432	2560	<10 sec.
WMS <sup>1</sup>	160148696	663	15042	<20 sec.

it brings it to a "Running" state, without ever querying back the state of the job. The logic is such because it is naturally expected that this process has exclusive control over the rest of the job workflow, once it starts running. Fixing such a problem without compromising efficiency is not trivial.

After the model is written using any text editor, the state space can be explicitly generated and stored. The execution times and the resulting numbers of states are presented in Table I. Generating the LTS with the mCRL2 toolset can be a time consuming process, since the state space typically grows exponentially with the number of parallel processes in the model. Reasonably small LTSs can be easily visualised with the interactive GUI tools, as the tools employ smart clustering techniques to reduce the complexity of the image. For instance, the SMS model, with around 18000 states, was visualized with DiaGraphica [31]. Fig. 6 shows a projection (clustering) of the state space on the CacheReplicas memory process, which resulted in only 7 interesting states for this process alone. The clustering allowed us to see precisely which chain of actions by the concurrent agents advanced the

<sup>1</sup>state space explored using the LTSmin [32] symbolic reachability tool

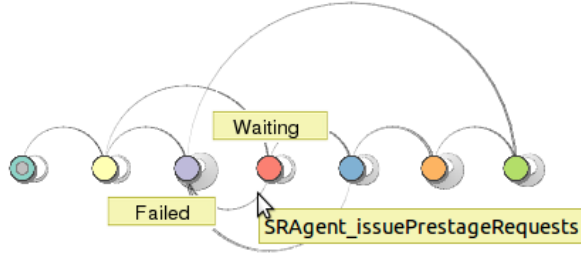


Fig. 6. CacheReplicaMem process visualization with DiaGraphica

state of the CacheReplicas entity. In fact, in the modeling phase we discovered the first problematic SMS behavior blocking the progress of staging tasks (and as a result the progress of jobs) in this way. The origin of the deadlock had been a result of a trivial bug introduced in coding. At a particular circumstance, when a “New” task enters the system **and** all associated replicas are already “Staged” (possibly by other jobs requiring the same input files), its status would immediately be promoted to “Done”. Such tasks would never be picked up by SMS and called-back to the appropriate job, since the agent responsible for this final step would only look for “Staged” tasks. A proper state machine implementation instead of hardcoding states in SQL queries can prevent such bugs.

The default requirement specification language in the mCRL2 toolset is the modal  $\mu$ -calculus [5], extended with regular expressions and data. The ‘\*’ is used for cardinality, meaning that the action can occur any number of times. The modalities “[ ]” and “<>” are used for *necessarily* and *possibly* statements in a formula. *Necessarily* means that the formula should hold for every action within the brackets, while *possibly* means that there exists an action along the path where the formula is satisfied. Using the gained understanding of the system behavior, as well as the reported and anticipated problems, we formulated several requirements:

- 1) Each task in a terminating state (“Failed” or “Staged”) is eventually removed from the system. (*progress*)

```
[true* . (state([tStaged]) || state([tFailed]))
  . (! (state([tDeleted])))*)
<(! (state([tDeleted]))* . (state([tDeleted])))>
  true
```

- 2) A deleted task will never be referenced for transition to any other state. (*safety*)

```
[true*.state([tDeleted]). true*.
  (state([tNew]) || state([tStageSubmitted]) ||
    state([tStaged]) || state([tFailed]))false
```

- 3) Once a job has been killed, it cannot resurrect and start running. (*safety*)

```
[true*.state([jobstatus(Killed,
  MarkedForTermination)]) . true*.state([
  jobstatus(Running, JobInitialization)])]
  false
```

Model checking was carried out on a 64bit Intel Core™2 Duo (1.6GHz) machine with 2GB RAM. Both requirement 1 and 2 were found to be violated, as can be seen from the traces (Fig. 7). The race conditions manifest in a few subtle interactions between the SMS storage and the agents. In both cases, at step 4 the *Stage Request Agent* issues prestage requests and as a result the CacheReplicas entries (second element of the State column) are updated to “StageSubmitted”. Between the moment that this agent has selected the corresponding Task to update to the same state, to the point where the update is done (last step in both traces), other agents may have monitored these replica records and updated them to a new state, along with the associated Task. In practise, the manifestation of such race conditions depends on the speed of the agents propagating the state changes between the selection and update done by the *Stage Request Agent*. Such cases are nevertheless encountered in reality, when this agent has large lists of records to process. This results in a deadlock situation, as the Task will have no further state updates made by other agents, since from their perspective the state propagation is finished.

Explicit state space generation was not a viable option for the WMS, due to its size (13 concurrent processes). After around 5 million states generated in 2 hours, it eventually ran out of memory. Running the MPI version of the mCRL2 tool (LTSmin toolset [32]) for explicit-state exploration on 16 DAS4 [33] cluster nodes for more than 20 hours did not deliver the answer to requirement 3. We therefore resorted to using the LTSmin symbolic reachability tool which is almost instantaneous in traversing the state space, but does not explicitly store it. The tool has option for tracking the occurrence of a certain specified action, and reports the trace if such action is encountered during exploration. For this purpose, we extended the specification with a monitoring process which fires an error action if the requirement is violated.

With respect to requirement 3, a counterexample showed that, when staging was involved in the workflow of a job, the callback from the SMS was not properly handled. It awakened

#	Action	State
1	RPAgent_selectCacheReplicas([0, 1], New)	[tNew], [New, New], 2, 0, [0, 1], 1, 0, 1
2	RPAgent_prepareNewReplicas([0, 1], Waiting)	[tNew], [Waiting, Waiting], 1, 0, [0, 1], 1, 0, 1
3	SRAgent_selectCacheReplicas([0, 1], Waiting)	[tNew], [Waiting, Waiting], 1, 0, [0, 1], 2, 0, 1
4	SRAgent_issuePrestageRequests([0, 1], StageSubmitted)	[tNew], [StageSubmitted, StageSubmitted], 1, 0, [0, 1], 2, 0, 1
5	SMAgent_selectCacheReplicas([0, 1], StageSubmitted)	[tNew], [StageSubmitted, StageSubmitted], 1, 0, [0, 1], 2, 0, 1
6	SRAgent_selectTaskReplicas([0, 0], [0, 1])	[tNew], [StageSubmitted, StageSubmitted], 1, 0, [0, 1], 2, 0, 1
7	SMAgent_monitorStageRequests([0, 1], Failed)	[tNew], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
8	SMAgent_selectTaskReplicas([0, 0], [0, 1])	[tNew], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
9	SMAgent_monitorStageRequestsT([0, 0], tFailed)	[tFailed], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
10	SRAgent_issuePrestageRequestsT([0, 0], tStageSubmitted)	[tStageSubmitted], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1

#	Action	State
1	RPAgent_selectCacheReplicas([0, 1], New)	[tNew], [New, New], 2, 0, [0, 1], 1, 0, 1
2	RPAgent_prepareNewReplicas([0, 1], Waiting)	[tNew], [Waiting, Waiting], 1, 0, [0, 1], 1, 0, 1
3	SRAgent_selectCacheReplicas([0, 1], Waiting)	[tNew], [Waiting, Waiting], 1, 0, [0, 1], 2, 0, 1
4	SRAgent_issuePrestageRequests([0, 1], StageSubmitted)	[tNew], [StageSubmitted, StageSubmitted], 1, 0, [0, 1], 2, 0, 1
5	SMAgent_selectCacheReplicas([0, 1], StageSubmitted)	[tNew], [StageSubmitted, StageSubmitted], 1, 0, [0, 1], 2, 0, 1
6	SMAgent_monitorStageRequests([0, 1], Failed)	[tNew], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
7	SRAgent_selectTaskReplicas([0, 0], [0, 1])	[tNew], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
8	SMAgent_selectTaskReplicas([0, 0], [0, 1])	[tNew], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
9	SMAgent_monitorStageRequestsT([0, 0], tFailed)	[tFailed], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
10	RPAgent_clearFailedTasks([0, tDeleted])	[tDeleted], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
11	RPAgent_clearFailedTasks([0, tDeleted])	[tDeleted], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1
12	SRAgent_issuePrestageRequestsT([0, 0], tStageSubmitted)	[tStageSubmitted], [Failed, Failed], 1, 0, [0, 1], 6, [0, 0], 1

Fig. 7. Violation of requirements 1 (top) and 2 (bottom)



the job immediately to a “Waiting” (and eventually “Running”) state even if it had been manually “Killed” (using DIRAC’s command line API) by production managers meanwhile. Such zombie jobs were discovered in the system on several occasions, and with the model at hand it was easy to replay the behavior and localize the problem. The longer trace is available at [30]. The implementation was fixed to properly guard the callback against such transitions.

## V. CONCLUSIONS AND FUTURE WORK

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

Nam dui ligula, fringilla a, euismod sodales, sollicitudin vel, wisi. Morbi auctor lorem non justo. Nam lacus libero, pretium at, lobortis vitae, ultricies et, tellus. Donec aliquet, tortor sed accumsan bibendum, erat ligula aliquet magna, vitae ornare odio metus a mi. Morbi ac orci et nisl hendrerit mollis. Suspendisse ut massa. Cras nec ante. Pellentesque a nulla. Cum sociis natoque penatibus et magnis dis parturient montes, nascetur ridiculus mus. Aliquam tincidunt urna. Nulla ullamcorper vestibulum turpis. Pellentesque cursus luctus mauris.

## REFERENCES

- [1] Large Hadron Collider beauty experiment. [Online]. Available: <http://lhcb-public.web.cern.ch/lhcb-public>
- [2] A. Tsaregorodtsev, M. Bargiotti, N. Brook, A. R. Casajus, G. Castellani, P. Charpentier, C. Cioffi, J. Closier, R. G. Diaz, G. Kuznetsov, Y. Y. Li, R. Nandakumar, R. Paterson, A. Smith, M. S. Miguelez, and S. G. Jimenez, “DIRAC: A community grid solution,” in *Proc. Computing in High Energy Physics (CHEP 2007)*, vol. 119, no. 2. IOP Publishing.
- [3] A. Smith and A. Tsaregorodtsev, “DIRAC: Reliable data management for LHCb,” in *Proc. Computing in High Energy Physics (CHEP 2007)*, vol. 119, no. 2. IOP Publishing.
- [4] J. McManus and W. Bynum, “Design and analysis techniques for concurrent blackboard systems,” *Systems, Man and Cybernetics*, vol. 26, pp. 669–680, Nov. 1996.
- [5] J. Groote and T. Willemse, “Model-checking processes with data,” *Science of Computer Programming*, vol. 56, no. 3, pp. 251–273, 2005.
- [6] J. Groote, A. Mathijssen, M. Reniers, Y. Usenko, and M. V. Weerdenburg, “The formal specification language mCRL2,” 2007.
- [7] J. Groote et al., “The mCRL2 toolset,” Eindhoven University of Technology, Tech. Rep., 2008.
- [8] T. Basten, J. Baeten, and M. Reniers, *Process Algebra: Equational Theories of Communicating Processes*. NY, USA: Cambridge University Press, 2009.
- [9] Y. He and R. Janicki, “Verifying protocols by model checking: a case study of the wireless application protocol and the model checker SPIN,” in *Proc. CASCAN 2004*. IBM Press.
- [10] K. Palmkog, “Verification of the session management protocol,” Royal Institute of Technology, Masters Thesis, 2006.
- [11] G. Holzmann, *Design and validation of computer protocols*. Upper Saddle River, NJ, USA: Prentice-Hall Inc., 1990.
- [12] W. Fokkink, *Modelling Distributed Systems: Protocol Verification with  $\mu$ CRL*, 2nd ed. Springer, 2011.
- [13] T. Ball and S. Rajamani, “The SLAM toolkit,” in *Proc. Computer Aided Verification (CAV 2001)*. Springer-Verlag, pp. 260–264.
- [14] B. Badban, W. Fokkink, J. Groote, J. Pang, and J. V. Pol, “Verification of a sliding window protocol in  $\mu$ CRL and PVS,” *Formal Aspects of Computing*, vol. 17, no. 3, October 2005.
- [15] S. Islam, M. Sqalli, and S. Khan, “Modeling and formal verification of DHCP using SPIN,” *IJCSA*, May 2006.
- [16] J. Hwon, V. Kuster, and T. Willemse, “Analysing the control software of the Compact Muon Solenoid experiment at the Large Hadron Collider,” in press.
- [17] D. Bošnački, A. Mathijssen, and Y. Usenko, “Behavioural analysis of an I2C linux driver,” *Proc. FMICS 2009*.
- [18] H. Hojjat, M. Mousavi, and M. Sirjani, “Formal analysis of SystemC designs in process algebra,” *Fundamenta Informaticae*, pp. 19–42, 2011.
- [19] V. Visser and P. Mehlitz, “Model checking programs with Java PathFinder,” in *Proc. SPIN (2005)*.
- [20] B. Ploeger, “Analysis of ACS using mCRL2,” Technische Universiteit Eindhoven, CS-Report 09-11, 2009.
- [21] glite - Lightweight Middleware for Grid Computing. [Online]. Available: <http://glite.cern.ch>
- [22] A. Casajus, R. G. Diaz, S. Paterson, and A. Tsaregorodtsev, “DIRAC pilot framework and the DIRAC Workload Management System,” in *Proc. Computing in High Energy Physics (CHEP 2010)*. IOP Publishing.
- [23] Grid production shifter guide for LHCb. [Online]. Available: <https://twiki.cern.ch/twiki/bin/view/LHCb/ProductionShifterGuide>
- [24] M. Musuvathi and D. Engler, “Model checking large network protocol implementations,” in *In Proceedings of the First Symposium on Networked Systems Design and Implementation*, 2004, pp. 155–168.
- [25] R. Pelánek, “Fighting state space explosion: Review and evaluation,” in *In Proc. of Formal Methods for Industrial Critical Systems (FMICS08*, 2008.
- [26] J. Hatcliff, M. B. Dwyer, and H. Zheng, “Slicing software for model construction,” in *Higher-order and Symbolic Computation*, 1999, pp. 105–118.
- [27] Frama-c software suite. [Online]. Available: <http://frama-c.com>
- [28] Codesurfer. [Online]. Available: <http://www.grammatech.com/products/codesurfer>
- [29] J. C. Corbett, M. B. Dwyer, J. Hatcliff, S. Laubach, C. S. Pasareanu, and H. Zheng, “Bandera: Extracting finite-state models from java source code,” in *Proc. 22nd International Conference on Software Engineering*. ACM Press, 2000, pp. 439–448.
- [30] mCRL2 SVN repository. [Online]. Available: <https://svn.win.tue.nl/viewvc/MCRL2/trunk/examples/>
- [31] Diagraphica. [Online]. Available: <http://www.comp.leeds.ac.uk/scsajp/applications/diagraphica>
- [32] S. Blom, J. V. de Pol, and M. Weber, “LTSMIn : Distributed and symbolic reachability,” *Formal Methods and Tools*, University of Twente, The Netherlands, Tech. Rep.
- [33] The Distributed ASCI Supercomputer 4. [Online]. Available: <http://www.cs.vu.nl/das4/>