V8 Phase 5 Internal Bridge Pack

Token-position sensitivity, phrase-localization strength, and context-to-readout path behavior built from the locked Phase 4 localization traces.

Main Read

Phase 5 shows that the bridge is not just where a layer peaks. It is also how the packet moves through token positions. The current matrix separates into front-context rows, late-context rows, readout-led rows, and context-to-readout bridge rows.

Model	Dom	Layer	Span	T/Ctx	L/T	Path
Mistral	mid	31	0	0.817	0.579	late-context supported target
Qwen	early	34	0	0.766	0.705	front-context loaded
Gemma	last	41	0	0.887	1.474	readout-led
DeepSeek	early	25	1	0.539	0.674	front-context loaded
Hermes	mid	31	0	0.816	0.666	late-context supported target
GLM	mid	38	0	0.796	1.014	late-context to readout bridge
Nemotron	early	39	1	0.214	1.699	front-context to readout bridge
SmolLM3	mid	35	1	0.857	0.556	late-context supported target

Phrase Bridge Notes

Mistral: top sequence **mid > pre > target**; target/surround **0.914**; dominant↔target overlap **3** (Jaccard **0.231**); shared dims **835, 1375, 3855**.

Qwen: top sequence **early > pre > mid**; target/surround **0.784**; dominant↔target overlap **0** (Jaccard **0.000**); shared dims **none**.

Gemma: top sequence **last > mid > target**; target/surround **1.005**; dominant↔target overlap **0** (Jaccard **0.000**); shared dims **none**.

DeepSeek: top sequence **early > pre > mid**; target/surround **0.704**; dominant↔target overlap **1** (Jaccard **0.067**); shared dims **2570**.

Hermes: top sequence **mid > pre > target**; target/surround **0.884**; dominant↔target overlap **4** (Jaccard **0.333**); shared dims **1375, 1641, 3244, 3855**.

GLM: top sequence **mid > pre > early**; target/surround **0.853**; dominant↔target overlap **2** (Jaccard **0.143**); shared dims **2724, 3665**.

Nemotron: top sequence **early > mid > last**; target/surround **0.754**; dominant↔target overlap **0** (Jaccard **0.000**); shared dims **none**.

SmolLM3: top sequence **mid > early > pre**; target/surround **0.869**; dominant↔target overlap **0** (Jaccard **0.000**); shared dims **none**.

Charts

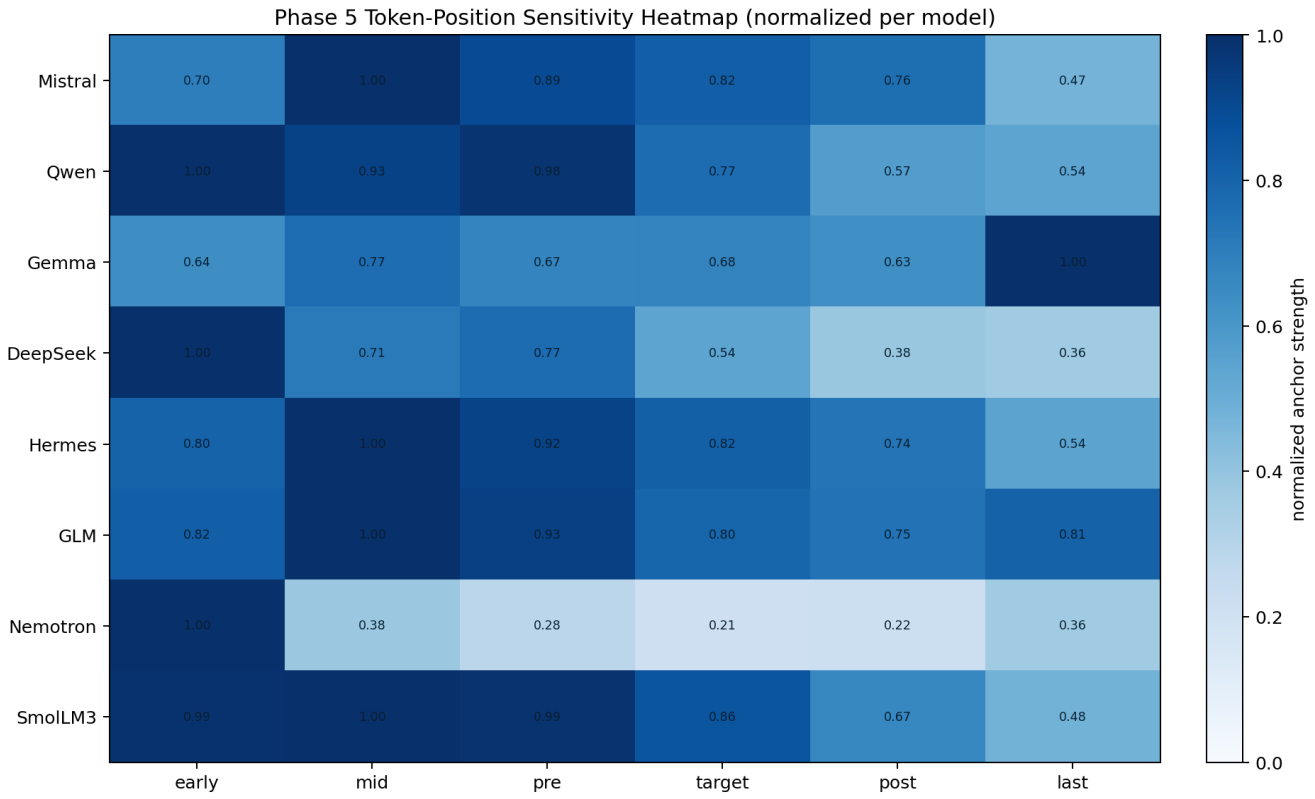
Phase 5 Token-Position Sensitivity Heatmap (normalized per model)
Mistral
Qwen
Gemma
DeepSeek
Hermes
GLM
Nemotron
SmolLM3
early
mid
pre
target
post
last
0.70 1.00 0.89 0.82 0.76 0.47
1.00 0.93 0.98 0.77 0.57 0.54
0.64 0.77 0.67 0.68 0.63 1.00
1.00 0.71 0.77 0.54 0.38 0.36
0.80 1.00 0.92 0.82 0.74 0.54
0.82 1.00 0.93 0.80 0.75 0.81
1.00 0.38 0.28 0.21 0.22 0.36
0.99 1.00 0.99 0.86 0.67 0.48
normalized anchor strength
1.0
0.8
0.6
0.4
0.2
0.0

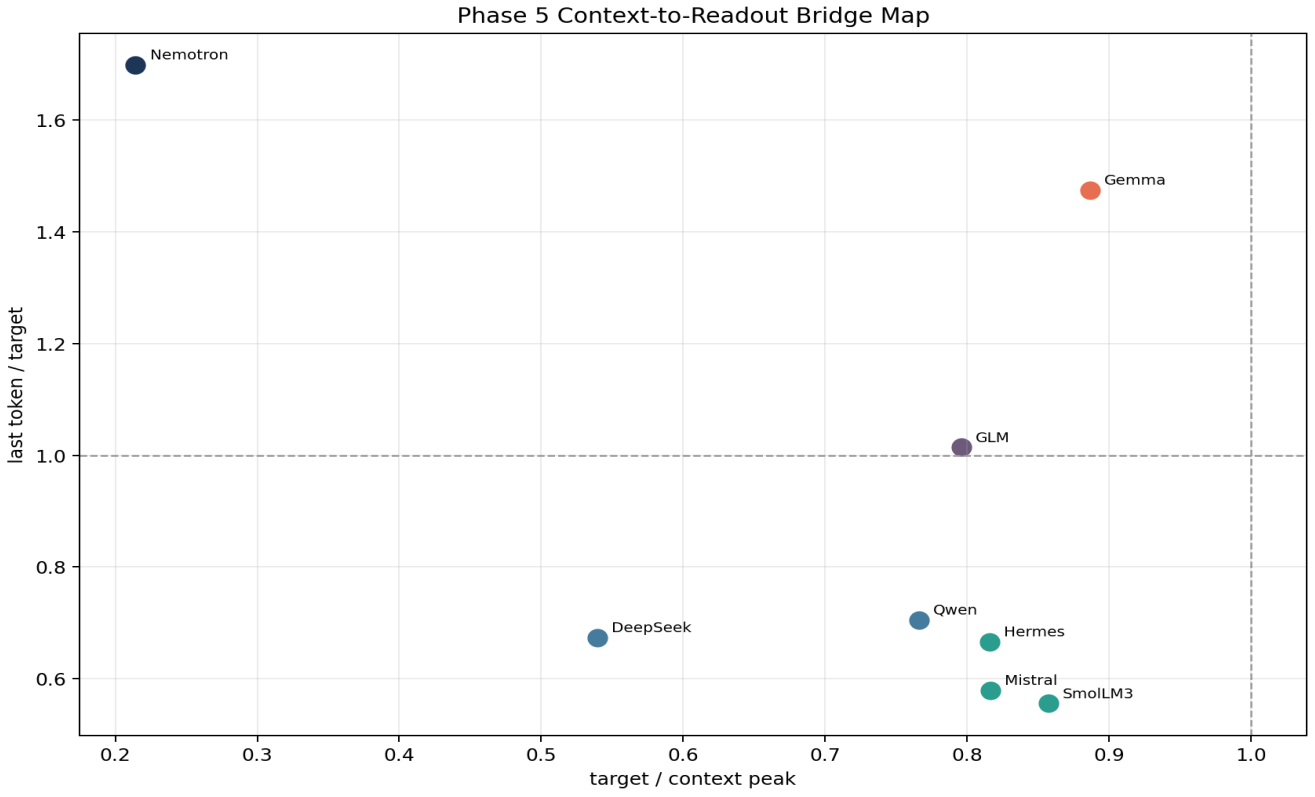
Phase 5 Context-to-Readout Bridge Map
Nemotron
Gemma
GLM
Qwen
DeepSeek
Hermes
Mistral
SmolLM3
last token / target
target / context peak
1.6
1.4
1.2
1.0
0.8
0.6
0.2
0.3
0.4
0.5
0.6
0.7
0.8
0.9
1.0

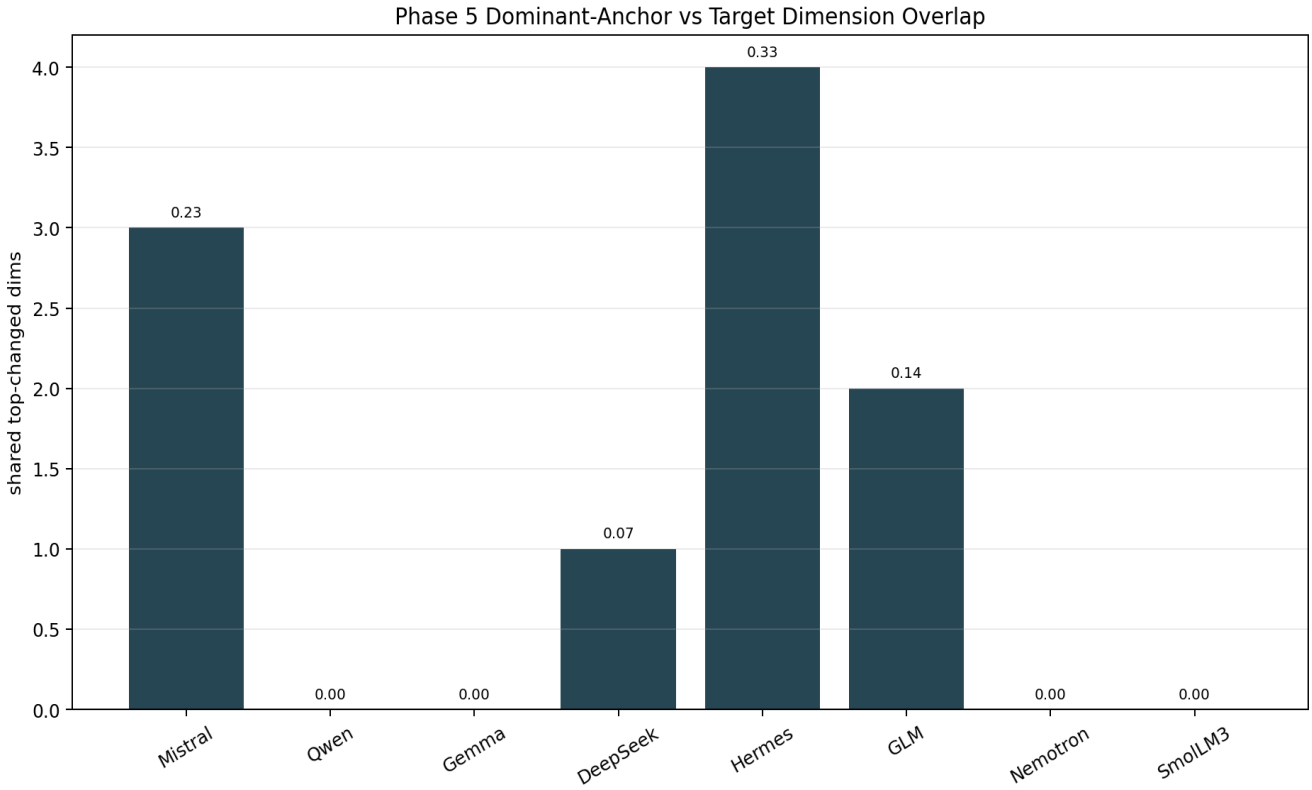
Phase 5 Dominant-Anchor vs Target Dimension Overlap
shared top-changed dims
0.0
0.5
1.0
1.5
2.0
2.5
3.0
3.5
4.0
0.23
0.00
0.00
0.07
0.33
0.14
0.00
0.00
Mistral
Qwen
Gemma
DeepSeek
Hermes
GLM
Nemotron
SmolLM3

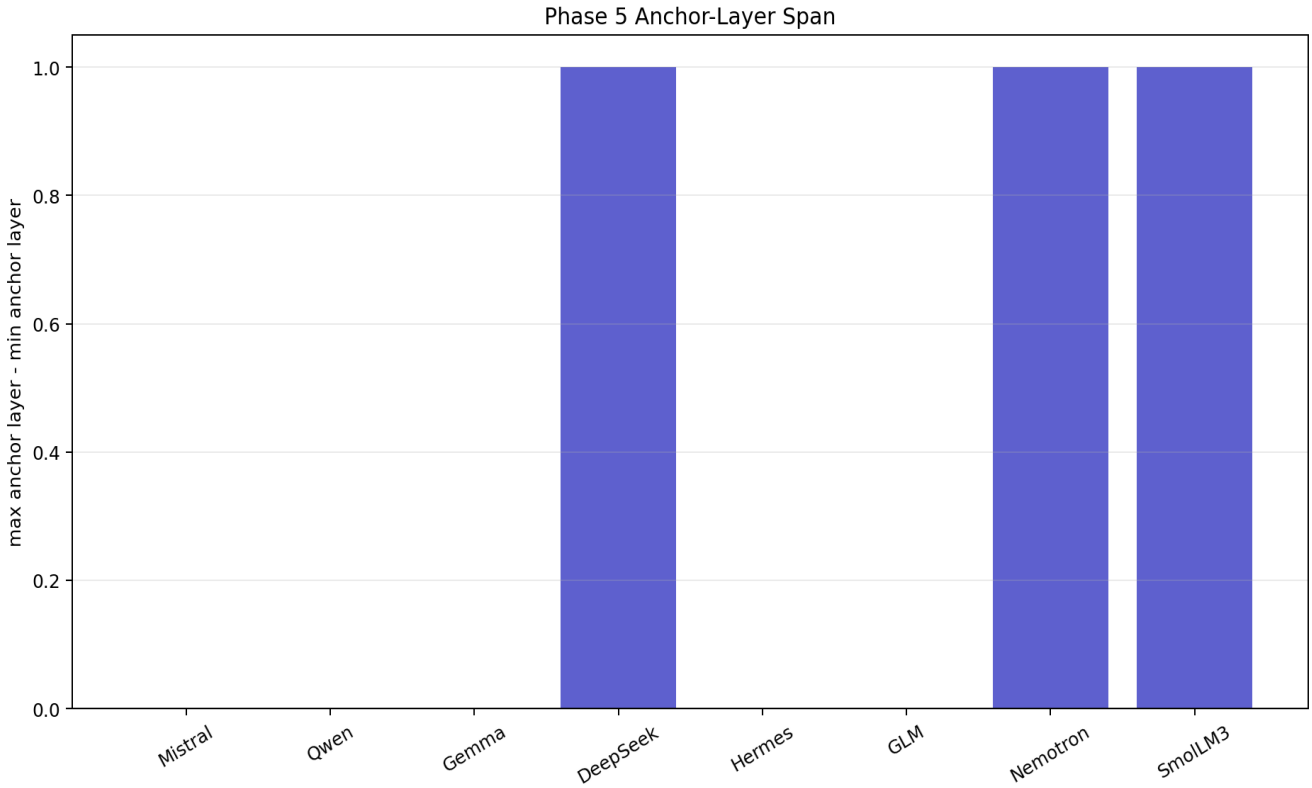
Phase 5 Anchor-Layer Span
max anchor layer - min anchor layer
0.0
0.2
0.4
0.6
0.8
1.0
Mistral
Qwen
Gemma
DeepSeek
Hermes
GLM
Nemotron
SmolLM3