



IOS STATIC ANALYSIS REPORT



🍏 Appgroffe (1.0.0)

File Name:

app-groffe.ipa

Identifier:

com.example.appgroffe


Scan Date:

May 5, 2025, 7:37 p.m.

App Security Score:


55/100 (MEDIUM RISK)

Grade:



 FINDINGS SEVERITY



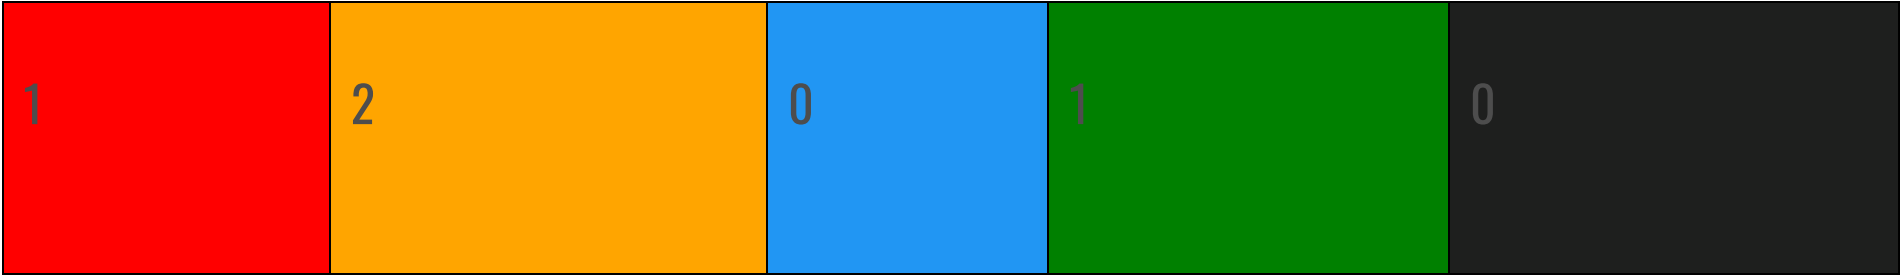

 FILE INFORMATION

File Name: app-groffe.ipa
Size: 48.77MB
MD5: 8824cec9ac47c24defc6470205ba9035
SHA1: 0cf28bd195d70c3676e28c2dcca71fd3fd0c212
SHA256: e9a3a80cf417c8d9cdd386d94abc9afe3a2970a566bb33670acfb326dfa7925

 APP INFORMATION

App Name: Appgroffe
App Type: Swift
Identifier: com.example.appgroffe
SDK Name: iphonesimulator17.5
Version: 1.0.0
Build: 1
Platform Version: 17.5
Min OS Version: 12.0
Supported Platforms: iPhoneSimulator,

 BINARY INFORMATION

Arch: x86_64
Sub Arch: CPU_SUBTYPE_X86_64_ALL
Bit: 64-bit
Endian: <

 APPLICATION PERMISSIONS

PERMISSIONS	STATUS	INFO	REASON IN MANIFEST
NSLocalNetworkUsageDescription	normal	Allow app to request access to the local network.	Allow Flutter tools on your computer to connect and debug your application. This prompt will not appear on release builds.

APP TRANSPORT SECURITY (ATS)

NO	ISSUE	SEVERITY	DESCRIPTION
----	-------	----------	-------------

IPA BINARY CODE ANALYSIS

NO	ISSUE	SEVERITY	STANDARDS	DESCRIPTION
----	-------	----------	-----------	-------------

IPA BINARY ANALYSIS

PROTECTION	STATUS	SEVERITY	DESCRIPTION
NX	False	info	The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.
PIE	True	info	The binary is build with -fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.
STACK CANARY	False	high	This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries.
ARC	True	info	The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.

PROTECTION	STATUS	SEVERITY	DESCRIPTION
RPATH	True	warning	The binary has Runpath Search Path (@rpath) set. In certain cases an attacker can abuse this feature to run arbitrary executable for code execution and privilege escalation. Remove the compiler option -rpath to remove @rpath.
CODE SIGNATURE	True	info	This binary has a code signature.
ENCRYPTED	False	warning	This binary is not encrypted.
SYMBOLS STRIPPED	False	warning	Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

 DYNAMIC LIBRARY & FRAMEWORK BINARY ANALYSIS

NO	DYLIB/Framework	NX	Stack Canary	ARC	RPATH	Code Signature	Encrypted	Symbols Stripped
----	-----------------	----	--------------	-----	-------	----------------	-----------	------------------

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
1	Frameworks/libswiftCoreGraphics.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
2	Frameworks/libswiftQuartzCore.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
3	Frameworks/libswiftUIKit.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
4	Frameworks/libswiftos.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
5	Frameworks/libswiftDispatch.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
6	Frameworks/libswiftFoundation.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
7	Frameworks/libswiftCore.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
8	Frameworks/libswiftMetal.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
9	Frameworks/libswiftObjectiveC.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
10	Frameworks/libswiftCoreFoundation.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
11	Frameworks/libswiftDarwin.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
12	Frameworks/libswiftCoreMedia.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
13	Frameworks/libswiftCoreImage.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
14	Frameworks/libswiftCoreAudio.dylib	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False warning This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries. This might be okay for pure Swift dylibs.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
1	Payload/Runner.app/Frameworks/App.framework/App	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option -fstack-protector-all to enable stack canaries.	False high The binary is not compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and protects from memory corruption vulnerabilities. Use compiler option -fobjc-arc to enable ARC or set Objective-C Automatic Reference Counting to YES in project configuration.	True warning The binary has Runpath Search Path (@rpath) set. In certain cases an attacker can abuse this feature to run arbitrary executable for code execution and privilege escalation. Remove the compiler option -rpath to remove @rpath.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

NO	DYLIB/Framework	NX	STACK CANARY	ARC	RPATH	CODE SIGNATURE	ENCRYPTED	SYMBOLS STRIPPED
2	Payload/Runner.app/Frameworks/Flutter.framework/Flutter	False info The binary does not have NX bit set. NX bit offer protection against exploitation of memory corruption vulnerabilities by marking memory page as non-executable. However iOS never allows an app to execute from writeable memory. You do not need to specifically enable the 'NX bit' because it's always enabled for all third-party code.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	True info The binary is compiled with Automatic Reference Counting (ARC) flag. ARC is a compiler feature that provides automatic memory management of Objective-C objects and is an exploit mitigation mechanism against memory corruption vulnerabilities.	False info The binary does not have Runpath Search Path (@rpath) set.	True info This binary has a code signature.	False warning This binary is not encrypted.	False warning Debug Symbols are available. To strip debugging symbols, set Strip Debug Symbols During Copy to YES, Deployment Postprocessing to YES, and Strip Linked Product to YES in project's build settings.

</> CODE ANALYSIS

NO	ISSUE	SEVERITY	STANDARDS	FILES
----	-------	----------	-----------	-------

! OFAC SANCTIONED COUNTRIES

This app may communicate with the following OFAC sanctioned list of countries.

DOMAIN	COUNTRY/REGION
--------	----------------

🔍 DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
semver.org	ok	IP: 185.199.108.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
flutter.github.io	ok	IP: 185.199.108.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map
ocsp.apple.com	ok	IP: 17.253.21.205 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map

DOMAIN	STATUS	GEOLOCATION
dartlang.org	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.w3.org	ok	IP: 104.18.23.19 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
developer.apple.com	ok	IP: 17.253.97.204 Country: United States of America Region: New Jersey City: Newark Latitude: 40.735661 Longitude: -74.172371 View: Google Map
pubs.opengroup.org	ok	IP: 44.195.190.5 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
docs.flutter.dev	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

DOMAIN	STATUS	GEOLOCATION
groups.google.com	ok	IP: 216.239.34.177 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
dart.dev	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
github.com	ok	IP: 140.82.112.3 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
fiddle.skia.org	ok	IP: 35.201.76.220 Country: United States of America Region: Missouri City: Kansas City Latitude: 39.099731 Longitude: -94.578568 View: Google Map
www.zlib.net	ok	IP: 85.187.148.2 Country: United States of America Region: Michigan City: Ann Arbor Latitude: 42.277561 Longitude: -83.740883 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.youtube.com	ok	IP: 172.253.63.93 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.jsonrpc.org	ok	IP: 216.92.244.249 Country: United States of America Region: Pennsylvania City: Pittsburgh Latitude: 40.424881 Longitude: -79.980957 View: Google Map
developer.android.com	ok	IP: 142.251.111.101 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
api.flutter.dev	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
dartbug.com	ok	IP: 216.239.32.21 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

DOMAIN	STATUS	GEOLOCATION
help.apple.com	ok	IP: 23.222.201.219 Country: United States of America Region: Minnesota City: Minneapolis Latitude: 44.979969 Longitude: -93.263840 View: Google Map
pub.dev	ok	IP: 34.36.0.14 Country: United States of America Region: Texas City: Houston Latitude: 29.941401 Longitude: -95.344498 View: Google Map
ddsuri.host	ok	No Geolocation information available.
serverfault.com	ok	IP: 172.64.148.218 Country: United States of America Region: Texas City: Dallas Latitude: 32.783058 Longitude: -96.806671 View: Google Map
scripts.sil.org	ok	IP: 104.22.10.254 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.apple.com	ok	IP: 23.55.204.208 Country: United States of America Region: California City: San Jose Latitude: 37.339390 Longitude: -121.894958 View: Google Map
gcc.gnu.org	ok	IP: 8.43.85.97 Country: United States of America Region: North Carolina City: Raleigh Latitude: 35.773994 Longitude: -78.632759 View: Google Map
127.0.0.1	ok	IP: 127.0.0.1 Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map
developer.mozilla.org	ok	IP: 34.111.97.67 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
unicode.org	ok	IP: 64.182.27.164 Country: United States of America Region: Texas City: Dallas Latitude: 32.814899 Longitude: -96.879204 View: Google Map

DOMAIN	STATUS	GEOLOCATION
tools.ietf.org	ok	IP: 104.16.45.99 Country: United States of America Region: Texas City: Dallas Latitude: 32.783058 Longitude: -96.806671 View: Google Map
docs.microsoft.com	ok	IP: 23.9.176.181 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
www.w3c.orghttp	ok	No Geolocation information available.
www.owasp.org	ok	IP: 104.22.26.77 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.unicode.org	ok	IP: 64.182.27.164 Country: United States of America Region: Texas City: Dallas Latitude: 32.814899 Longitude: -96.879204 View: Google Map

DOMAIN	STATUS	GEOLOCATION
learn.microsoft.com	ok	IP: 23.48.10.32 Country: United States of America Region: Colorado City: Englewood Latitude: 39.647770 Longitude: -104.987762 View: Google Map
www.iana.org	ok	IP: 192.0.46.8 Country: United States of America Region: Virginia City: Reston Latitude: 38.968719 Longitude: -77.341103 View: Google Map
example.com	ok	IP: 23.192.228.80 Country: United States of America Region: California City: San Jose Latitude: 37.339390 Longitude: -121.894958 View: Google Map
fuchsia.dev	ok	IP: 216.239.32.27 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
labs.creativecommons.org	ok	IP: 213.138.109.109 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: York Latitude: 53.957630 Longitude: -1.082710 View: Google Map

DOMAIN	STATUS	GEOLOCATION
web.archive.org	ok	IP: 207.241.237.3 Country: United States of America Region: California City: San Francisco Latitude: 37.781734 Longitude: -122.459435 View: Google Map
skia.org	ok	IP: 35.201.76.220 Country: United States of America Region: Missouri City: Kansas City Latitude: 39.099731 Longitude: -94.578568 View: Google Map
chromium.googlesource.com	ok	IP: 172.253.63.82 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.google.com	ok	IP: 64.233.180.103 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
bjoern.hoehrmann.de	ok	IP: 173.236.251.102 Country: United States of America Region: California City: Brea Latitude: 33.930222 Longitude: -117.888420 View: Google Map

DOMAIN	STATUS	GEOLOCATION
en.wikipedia.org	ok	IP: 208.80.154.224 Country: United States of America Region: California City: San Francisco Latitude: 37.791256 Longitude: -122.400810 View: Google Map
crl.apple.com	ok	IP: 17.253.21.204 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
example.org	ok	IP: 96.7.128.186 Country: United States of America Region: California City: El Segundo Latitude: 33.919182 Longitude: -118.416473 View: Google Map
www.rfc-editor.org	ok	IP: 104.22.50.131 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
cs.chromium.org	ok	IP: 142.251.179.102 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map

DOMAIN	STATUS	GEOLOCATION
man7.org	ok	IP: 45.84.72.15 Country: Germany Region: Sachsen City: Leipzig Latitude: 51.339619 Longitude: 12.371290 View: Google Map
www.ecma-international.org	ok	IP: 83.166.133.61 Country: Switzerland Region: Geneve City: Carouge Latitude: 46.180962 Longitude: 6.139210 View: Google Map
wakamaifondue.com	ok	IP: 173.236.252.234 Country: United States of America Region: California City: Brea Latitude: 33.930222 Longitude: -117.888420 View: Google Map
ecma-international.org	ok	IP: 83.166.133.61 Country: Switzerland Region: Geneve City: Carouge Latitude: 46.180962 Longitude: 6.139210 View: Google Map
polymer.github.io	ok	IP: 185.199.108.153 Country: United States of America Region: Pennsylvania City: California Latitude: 40.065632 Longitude: -79.891708 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.concentric.net	ok	IP: 204.74.99.100 Country: United States of America Region: California City: San Mateo Latitude: 37.570728 Longitude: -122.318901 View: Google Map
certs.apple.com	ok	IP: 17.253.21.204 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
www.example.com	ok	IP: 23.3.13.19 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
flutter.dev	ok	IP: 199.36.158.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
gitlab.com	ok	IP: 172.65.251.78 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

_int32x4list@8027147._uninstant EMAILlist@8027147._uninstant bigintimpl@0150898.fromdoubl	FILE
_growablelist@0150898.empty _uint8clampedlist@8027147._uninstant appro@openssl.org _type@0150898._uninstant _list@0150898.generate _float32x4list@8027147._uninstant _twobytestring@0150898._uninstant _growablelist@0150898.withcapaci _int8list@8027147._uninstant _growablelist@0150898._literal3 _growablelist@0150898.of _bigintimpl@0150898._normalize _growablelist@0150898._literal1 _growablelist@0150898._literal4 _growablelist@0150898._literal _growablelist@0150898._ofefficie _list@0150898._ofefficie externalfloat32array@8027147._uninstant _futurelistener@5048458.thenawait _uint8list@8027147._uninstant adam@solvr.io _functiontype@0150898._uninstant _futurelistener@5048458.then _smi@0150898._uninstant _growablelist@0150898._ofarray _class@xxx._construct _futurelistener@5048458.catcherror _sendport@1026248._uninstant _externaluint64array@8027147._uninstant _double@0150898.fromintege _list@0150898.filled ternalfloat64x2array@8027147._uninstant _constmap@3099033._uninstant _list@0150898.empty _externalint8array@8027147._uninstant _int32list@8027147._uninstant _immutablelist@0150898._from _recordtype@0150898._uninstant _list@0150898._ofgrowabl _growablelist@0150898._literal7 _futurelistener@5048458.whencomple _onebytestring@0150898._uninstant _int16list@8027147._uninstant jjb@xnz.jt _growablelist@0150898.filled _futurelistener@0150898._uninstant	Payload/Runner.app/Frameworks/Flutter.framework/Flutter

EMAIL _typeparameter@0150898._uninstant _growablelist@0150898._withdata _constset@3099033._uninstant	FILE
_float64x2list@8027147._uninstant _float32list@8027147._uninstant _record@0150898._uninstant _bigintimpl@0150898._fromint _list@0150898._ofarray _stringbase@0150898._uninstant naluint8clampedarray@8027147._uninstant _mirrorreference@2408521._uninstant _growablelist@0150898._literal2 _uint16list@8027147._uninstant	

SCAN LOGS

Timestamp	Event	Error
2025-05-05 19:37:15	iOS Binary (IPA) Analysis Started	OK
2025-05-05 19:37:15	Generating Hashes	OK
2025-05-05 19:37:15	Extracting IPA	OK
2025-05-05 19:37:15	Unzipping	OK
2025-05-05 19:37:15	iOS File Analysis and Normalization	OK
2025-05-05 19:37:15	iOS Info.plist Analysis Started	OK
2025-05-05 19:37:15	Finding Info.plist in iOS Binary	OK

2025-05-05 19:37:15	Fetching Details from App Store: com.example.appgroffe	OK
2025-05-05 19:37:15	Searching for secrets in plist files	OK
2025-05-05 19:37:15	Starting Binary Analysis	OK
2025-05-05 19:37:15	Dumping Classes from the binary	OK
2025-05-05 19:37:15	Running jtool against the binary for dumping classes	OK
2025-05-05 19:37:15	Library Binary Analysis Started	OK
2025-05-05 19:37:15	Analyzing Payload/Runner.app/Frameworks/libswiftCoreGraphics.dylib	OK
2025-05-05 19:37:15	Analyzing Payload/Runner.app/Frameworks/libswiftQuartzCore.dylib	OK
2025-05-05 19:37:15	Analyzing Payload/Runner.app/Frameworks/libswiftUIKit.dylib	OK
2025-05-05 19:37:15	Analyzing Payload/Runner.app/Frameworks/libswiftos.dylib	OK
2025-05-05 19:37:15	Analyzing Payload/Runner.app/Frameworks/libswiftDispatch.dylib	OK
2025-05-05 19:37:15	Analyzing Payload/Runner.app/Frameworks/libswiftFoundation.dylib	OK

2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftCore.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftMetal.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftObjectiveC.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftCoreFoundation.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftDarwin.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftCoreMedia.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftCoreImage.dylib	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/libswiftCoreAudio.dylib	OK
2025-05-05 19:37:16	Framework Binary Analysis Started	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/App.framework/App	OK
2025-05-05 19:37:16	Analyzing Payload/Runner.app/Frameworks/Flutter.framework/Flutter	OK
2025-05-05 19:37:18	Extracting String Metadata	OK

2025-05-05 19:37:18	Extracting URL and Email from IPA	OK
2025-05-05 19:37:21	Performing Malware check on extracted domains	OK
2025-05-05 19:37:26	Fetching IPA icon path	OK
2025-05-05 19:37:27	Updating Trackers Database....	OK
2025-05-05 19:37:27	Detecting Trackers from Domains	OK
2025-05-05 19:37:28	Saving to Database	OK

Report Generated by - MobSF v4.3.3

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2025 Mobile Security Framework - MobSF | [Ajin Abraham](#) | [OpenSecurity](#).