

Barrier-Free Routes in a Geographic Information System for Mobility Impaired People

Bernard H. Ugalde

*University of Technology &
Applied Sciences*
Salalah, Dhofar, Sultanate of Oman
bernard.u@sct.edu.om

Renato R. Maaliw III

*College of Engineering
Southern Luzon State University*
Lucban, Quezon, Philippines
rmaaliw@slsu.edu.ph

Suresh Palarimath

*University of Technology &
Applied Sciences*
Salalah, Dhofar, Sultanate of Oman
suresh.p@sct.edu.om

Mohammed Bakhit Al Mahri

*University of Technology and
Applied Sciences*
Salalah, Dhofar, Sultanate of Oman
ma.mahri@sct.edu.om

Albert A. Vinluan

New Era University
Quezon City, Philippines
albertvinluan@gmail.com

Jennifer T. Carpio

University of Makati
Makati City, Philippines
jennifer.carpio@umak.edu.ph

Ace C. Lagman

*Information Technology Dept.
FEU Institute of Technology*
Manila, Philippines
aclagman@feutech.edu.ph

Maurine C. Panergo

*College of Engineering
Southern Luzon State University*
Lucban, Quezon, Philippines
mpanergo@slsu.edu.ph

Abstract—It is always difficult to travel alone in a wheelchair without prior knowledge of the accessibility of the planned route. The majority of people prefer the shorter route. On the other hand, those with ambulatory limitations may prefer a longer route with proper ramps and drop curbs. This study aims to design obstacle management so that a registered user can report the accessibility of a ramp. The research includes an algorithm for generating barrier-free routes on the derived graph paths. When a wheelchair user encounters an obstacle while navigating the suggested route, the algorithm redirects them to their destination. A simulation test was performed, and the entire approach was evaluated using the survey method. The results showed that the proposed routing algorithm could find the shortest paths and reroute users to an unobstructed path. Respondents were highly pleased with the proposed navigation system's performance and thought it was accessible, usable, and reliable. As a result, the study may provide a novel approach to designing a geographic information system for use in a wheelchair navigation system.

Keywords—geographic information system, mobility-impaired person, obstacle management, optimization, routing algorithm, shortest-path

I. INTRODUCTION

Traveling alone in a wheelchair without prior knowledge of the accessibility of the intended route is often a problem [1] – [3]. Ordinary people typically take the shortest route, but people with motor disabilities may prefer a long way without an uphill. They cannot make quick decisions, particularly when they are out in the field. They usually try to remember routes and information about accessibility in each area they visit. This strategy can prove problematic in the future, especially if they encounter a dynamic or static obstacle that differs from their previous experience.

These people usually cannot attempt a new route quickly because they are unprepared for various risks, such as being stranded in front of a road with insufficient drop curbs. Hence, many wheelchair users are hesitant to travel to a few places because they are unfamiliar with the new world and its accessibility requirements [4] [5]. Some wheelchair users may

be able to overcome these difficulties, while others may not. As a result, obstacle detection becomes essential when dealing with wheelchair users, as proven in map navigation services [6] [7]. The obstacle management system will ensure that the safest path is found to circumvent impediments.

II. REVIEW OF RELATED LITERATURE

In our previous studies, we looked at how to derive the graph representation of the road network for people with limited mobility [8]. It then used mathematical risk modeling and the Analytic Hierarchy Process to optimize the routes of the extracted graph model [9]. The optimal routes based on the user's geolocation and destinations were then produced utilizing the node combination technique based on Dijkstra's algorithm using a database containing the locations of the wheelchair-accessible ramps [10]. This led to the creation of a wheelchair navigation system in the form of a mobile application.

The following literature and studies were reviewed to find ways to generate barrier-free routes using an obstacle management. Proponents [11] developed and implemented a method for estimating the shortest path based on crowd-sourced constraints and obstacles. The technique was built on top of Google Maps' routing service, which was used to calculate the shortest distance between two points. Users provided limits, obstacles, and impassable areas as polygons, and the A* path-finding algorithm was used to guide users around a block. The application's barriers and paths, on the other hand, were not followed.

Authors [12] also proposed an algorithm for creating optimal routes for Automated Guided Vehicles (AGVs) in warehouses. The algorithm was designed to deal with a wide range of real-world situations, including obstacles. Each AGV executes the task according to the routing algorithm by starting in an initial position and orientation, then moving to a pre-determined position and orientation, resulting in minimum direction. The path was made up of a collection of AGV's positions and orientations. Based on Dijkstra's algorithm, the shortest path algorithm was tested in MATLAB under various working conditions.

Researchers [13] also created a mobile app that calculated barrier-free routes between two points based on a user's profile. The starting position of a route was determined using Bluetooth 4.0 transmitters, which send UUIDs to the server that include the transmitter's geolocation. They used geolocations, which are the global coordinate system, instead of specialized coordinate systems for each house. As a consequence, their approach is applicable to a wide variety of subjects.

Finally, reference [14] created an augmented reality (AR) decision support system for motor-impaired people's navigation aid on the campus of the University of Lille. Their system offered mobility information and allowed wheelchair users to move freely and faithfully from one location to another in real-time. The prototype made use of geological mapping to propose the quickest route to the target as well as potential roadblocks to avoid. However, because the blocks and itineraries were not recorded in a database, they were inaccessible to other study participants.

III. METHODOLOGY

This study aims to design an obstacle management so that a registered user can report the accessibility of a ramp. The obstacle management features an algorithm to create barrier-free routes on the derived graph paths. When an obstacle is encountered while navigating the suggested route, the algorithm redirects wheelchair users to their destination.

To put the developed obstacle management feature to the test, the proponents created a map editor where users can mark the accessibility of a ramp. The path-finding algorithm was also modified to include the new obstacle-free shortest path. Finally, a software quality survey to assess the application's accessibility, usability, and reliability was used. The tool was based on the ISO/IEC 20510 quality characteristics, which were comprised of eight criteria. However, since certain criteria were difficult to measure, the survey tool focused solely on functionality, reliability, and usability [15], which could be easily assessed [16].

According to scientists [17], the remaining characteristics were hard to ascertain unless assessed by highly qualified IT specialists. Nevertheless, functionality requirements are directed towards accuracy and interoperability. The reliability requirements are centered on dependability and consistency. Lastly, the usability requirements describe the usefulness of the software. The software quality questionnaire was made up of 15 questions. The assessment was quantified on a five-point Likert scale ranging from 1 (strongly disagree) to 5 (strongly agree).

Face validity was used to measure the survey tool's dependability. The survey tool was used on a subset of the intended survey participants. Cronbach's Alpha (CA) was used to assess the survey tool's internal consistency, with a result of 0.91 regarded as excellent.

TABLE I. DESCRIPTIVE INTERPRETATIONS OF THE FUNCTIONALITY, USABILITY, AND RELIABILITY OF THE SYSTEM

Point	Descriptors	Scale	Descriptive Interpretation		
			Functionality	Usability	Reliability
5	Strongly Agree	4.51 – 5.00	Very High	Very High	Very High
4	Agree	3.51 – 4.50	High	High	High
3	Modestly Agree	2.51 – 3.50	Moderate	Moderate	Moderate
2	Disagree	1.51 – 2.50	Low	Low	Low
1	Strongly Disagree	1.00 – 1.50	Very Low	Very Low	Very Low

The mean values were interpreted in Table I. Follow up interviews were used to triangulate the results. The proponent employed purposive sampling to target mobility-impaired people, their family members and friends, and Information Technology (IT) professionals in the city Central Business District (CBD) of Baguio due to their substantial direct participation in the achievement of the research's objective. The study targeted a total of 35 people aged 18 and up, regardless of gender.

IV. RESULTS AND FINDINGS

A. Wheelchair Navigation System Architecture

As illustrated in Fig. 1, the wheelchair navigation system comprises an API that permits the usage of a geographic map offered by Google Maps. The wheelchair navigation system comprises an API that permits the usage of a geographic map offered by Google Maps. It makes use of a MySQL database hosted in the cloud. The mobile device serves as a gateway between the application and the user. It also keeps track of the user's current location. The Internet is required to ensure that the mobile application and other components can be accessed. In the data layer, the cloud server saves the node coordinates, accessibility matrix, and weight matrix. These data are crucial for correctly deploying the optimized and secured route. The data are processed and localized by the client layer before being shown on a mobile device. In the service layer, Google Maps provides localization services. Finally, the administrator's panel facilitates content creation and system management.

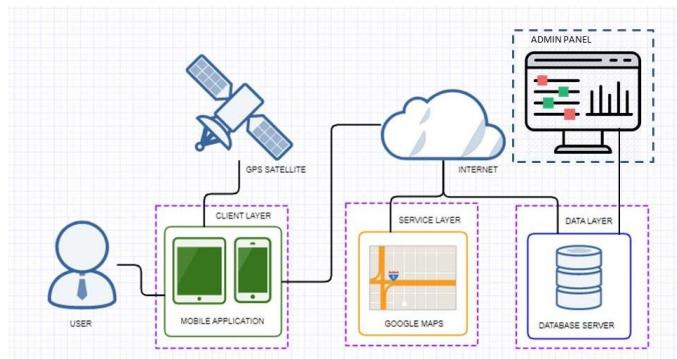


Fig. 1. Wheelchair navigation system architecture.

The mobile application was created in Kotlin, with a minimum SDK API 16 for Android 4.1 and an API Level 30 deployment unit. On the other hand, the administrator's panel was an online page built using PHP and Codeigniter frameworks. The software specifications of the mobile application are specified in Table II. It is made up of seven functional modules that all work together to create a reliable and robust wheelchair navigation system implementing the proposed GIS in the Baguio CBD.

TABLE II. MOBILE APPLICATION FUNCTIONAL REQUIREMENTS

Requirement Number	Feature	Description
FR01	Find Route	It allows users to generate routes utilizing the PWD ramps from one location to another.
FR02	Map and Nearby Places	It visualizes the user's current location and the surrounding PWD ramps, as well as their corresponding accessibility information.
FR03	Socials	It allows registered users to build a social network of family members and friends around them.
FR04	Monitor User	It provides real-time movement tracking for the user's social network. Unless the user enables it, this is turned off by default.
FR05	Travelogue	It collects data on places the user has visited, such as travel information.
FR06	Registration	The app enables users to register.
FR07	Map Editor	It enables registered users to define the accessibility of the ramps and report new ramps on the map.

B. Ramp Accessibility Module User and Admin Side

The mobile application has been updated to include a map editor that allows users to mark inaccessible ramps as well as a module that allows the administrator to monitor and approve reported accessibility issues.

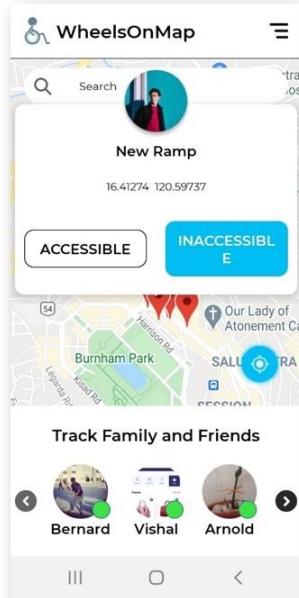


Fig. 2. Ramp accessibility module.

Using the mobile application, the user must select one of the ramps to define its accessibility, as shown in Fig 2. A window will show from which the user can choose whether the ramp is accessible or inaccessible. The user must include a brief description of the accessibility report.

Fig. 3. Reported accessibility.

All accessibility reports are saved and will appear in the administrator dashboard, as shown in Fig 3. The administrator has the option of approving or rejecting the reported accessibility. If the report is about inaccessibility, then the ramp changes color to red in the mobile application. Otherwise, the color of the ramp will be green.

C. The Obstacle-Free Shortest Path

If an obstacle occurs along the suggested route, the algorithm in the mobile application's find route applies the following pseudo code to divert wheelchair users to their destination utilizing a novel obstacle management strategy, as demonstrated in Algorithm 1.

Algorithm 1. ShortestPathObstacleFree

ShortestPathObstacleFree (G,NW,UP,src,dst,O)

```

currnode=src; j=1;
SOP[j]=currnode
While (currnode!=r)
    S = OPTIMALPATH (G, NW, UP, src, dst);
    i=1;
    While (0[S[i],P[i+1]] == 0 and currnode!=dst)
        i=i+1; currnode=p[i];
        j=j+1; SOP[j]=currnode;
    endWhile
    if(currnode!=dst)
        src=p[i];
        NW[p[i],p[i+1]] = ;
    endIf
endWhile
EndShortestPathObstacleFree

```

D. Simulation Test Results

Test runs were done to verify and validate the module's functionality, as shown in Fig 4. The routes were evaluated with one or more nodes were designated as unreachable.



Fig. 4. Obstacle management test run.

TABLE III. THE SHORTEST ROUTE WITH OBSTACLE SIMULATION RESULT

Path	Destination		Route	New Route	Remarks
	End Node	Land Mark			
Route 1	47	Rose Garden	52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 12 \Rightarrow 13 \Rightarrow 14 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 40 \Rightarrow 41 \Rightarrow 48 \Rightarrow 47	52 \Rightarrow 10 \Rightarrow 9 \Rightarrow 8 \Rightarrow 7 \Rightarrow 6 \Rightarrow 5 \Rightarrow 4 \Rightarrow 3 \Rightarrow 16 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 40 \Rightarrow 41 \Rightarrow 48 \Rightarrow 47	Remove 13
Route 2	73	Baguio Museum	52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 12 \Rightarrow 13 \Rightarrow 14 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 39 \Rightarrow 78 \Rightarrow 71 \Rightarrow 72 \Rightarrow 73	52 \Rightarrow 10 \Rightarrow 9 \Rightarrow 8 \Rightarrow 7 \Rightarrow 6 \Rightarrow 5 \Rightarrow 4 \Rightarrow 3 \Rightarrow 16 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 39 \Rightarrow 78 \Rightarrow 71 \Rightarrow 72 \Rightarrow 73	Remove 13
Route 3	82	Igorot Park	52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 12 \Rightarrow 13 \Rightarrow 14 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 32 \Rightarrow 33 \Rightarrow 34 \Rightarrow 82	52 \Rightarrow 10 \Rightarrow 9 \Rightarrow 8 \Rightarrow 7 \Rightarrow 6 \Rightarrow 5 \Rightarrow 4 \Rightarrow 3 \Rightarrow 16 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 32 \Rightarrow 33 \Rightarrow 34 \Rightarrow 82	Remove 13
Route 4	70	Sunshine Park	52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 12 \Rightarrow 13 \Rightarrow 14 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 39 \Rightarrow 78 \Rightarrow 71 \Rightarrow 70	52 \Rightarrow 10 \Rightarrow 9 \Rightarrow 8 \Rightarrow 7 \Rightarrow 6 \Rightarrow 5 \Rightarrow 4 \Rightarrow 3 \Rightarrow 16 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 39 \Rightarrow 78 \Rightarrow 71 \Rightarrow 70	Remove 13
Route 5	61	NBI Baguio	52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 51 \Rightarrow 55 \Rightarrow 56 \Rightarrow 57 \Rightarrow 59 \Rightarrow 58 \Rightarrow 60 \Rightarrow 61	52 \Rightarrow 10 \Rightarrow 9 \Rightarrow 8 \Rightarrow 7 \Rightarrow 6 \Rightarrow 5 \Rightarrow 4 \Rightarrow 3 \Rightarrow 16 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30	Remove 59

				\Rightarrow 37 \Rightarrow 38 \Rightarrow 39 \Rightarrow 78 \Rightarrow 71 \Rightarrow 68 \Rightarrow 67 \Rightarrow 119 \Rightarrow 61	
Route 6	99	Baguio City Hall		52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 12 \Rightarrow 13 \Rightarrow 14 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 30 \Rightarrow 37 \Rightarrow 38 \Rightarrow 39 \Rightarrow 42 \Rightarrow 43 \Rightarrow 123 \Rightarrow 124 \Rightarrow \Rightarrow 125 \Rightarrow 127 \Rightarrow 126 \Rightarrow \Rightarrow 128 \Rightarrow 129 \Rightarrow 131 \Rightarrow \Rightarrow 103 \Rightarrow 104 \Rightarrow 106 \Rightarrow \Rightarrow 107 \Rightarrow 94 \Rightarrow 95 \Rightarrow 105 \Rightarrow 100 \Rightarrow \Rightarrow 99	Remove 13
Route 7	97	Baguio Police Station		52 \Rightarrow 10 \Rightarrow 11 \Rightarrow 12 \Rightarrow 13 \Rightarrow 14 \Rightarrow 15 \Rightarrow 80 \Rightarrow 26 \Rightarrow 31 \Rightarrow 32 \Rightarrow 33 \Rightarrow 34 \Rightarrow 82 \Rightarrow 83 \Rightarrow 84 \Rightarrow 85 \Rightarrow 86 \Rightarrow 87 \Rightarrow 88 \Rightarrow 89 \Rightarrow 90 \Rightarrow 91 \Rightarrow 92 \Rightarrow 97	Remove 13

The findings of the tests are summarized in Table III. Based on the testing conducted, the application was able to construct a new path that avoided an inaccessible ramp. The newly generated route utilized other available adjacent ramps while maintaining the shortest route towards the destination ramp. Although the routes were longer, they included a path that was deemed safe for users due to its usage of PWD ramps. These findings corroborated those of [14]. The participants expressed great satisfaction with the experiment's outcome, based on the follow-up interview.

E. Software Quality Survey Results

Mobility-impaired people, their family members, and IT experts assessed the application's functionality, usability, and reliability using the software quality survey. Table IV displays the overall outcome of the survey. With weighted mean scores of 4.95, 4.92, and 4.82, the application was evaluated to have very high functionality, usability, and reliability. Hence, the proposed system indicated a very high quality, with an overall weighted mean calculated as 4.90.

According to the follow-up interview, the mobility-impaired people were pleased with the various aspects of the mobile application because it provided them with a complete solution for getting around the city. They stated that they would be willing to use the application in their everyday routine.

The family members were relieved to learn that the application would put them at ease when a family member needed to travel alone in their wheelchair. They were generally pleased with the overall features of the mobile application. They also believe that the application would be extremely beneficial to a family member with limited mobility.

TABLE IV. OVERALL WEIGHTED MEAN FOR THE SOFTWARE QUALITY SURVEY

Criteria	Weighted Mean	Interpretation
Functionality	4.95	Very High Functionality
Usability	4.92	Very High Usability
Reliability	4.82	Very High Reliability
Overall Weighted Mean	4.90	Very High Software Quality

Finally, the IT professionals were astounded that the proposed solution could create a map of PWD ramps, generate routes, and visualize it on top of the Google Maps API. They stated that accomplishing this would need much effort and analysis. They suggested, however, that a turn-by-turn capability and dynamic recalculation of the weight while navigating based on the factual information in the area could be considered in the future. Lastly, they stated that the application was highly recommended for people with limited mobility.

V. CONCLUSIONS AND RECOMMENDATIONS

This study aimed to design an obstacle management so that a registered user can report the accessibility of a ramp. Indeed, the research was able to design an algorithm for generating barrier-free routes on the derived graph paths. The simulation test revealed that the solution was able to redirect users to obscured path. The corresponding application was of high software qualify. Our study recommends identifying the proposed solution's performance against existing GIS for a mobility-impaired person in terms of travel time, route, and travel distance. A provision for artificial intelligence-based [18 – 20] will also be explored in the next version of the system.

ACKNOWLEDGMENT

The authors would like to express their gratitude to the University of Technology and Applied Sciences and all Higher Educational Institutions (HEIs) from the Philippines for their continuous support of such endeavors.

REFERENCES

- [1] P. Neis and D. Zielstra, "Generation of a tailored routing network for disabled people based on collaboratively collected geodata," *Applied Geography*, 47, 2014, 70-77.
- [2] I. Bauer, "When travel is a challenge: Travel medicine and the dis-abled traveller," *Travel medicine and infectious disease*, 22, 2018, pp. 66-72.
- [3] K. Mowrer, "Organization-Based Disability Access: A YMCA Childcare Center Case Study," 2019.
- [4] N. Thapar et al., "A pilot study of functional access to public buildings and facilities for persons with impairments," *Disability and Rehabilitation*, 26, no. 5, pp. 280-289, 2019.
- [5] H. Selander et al., "The car is my extra legs – experiences of outdoor mobility amongst immigrants in Sweden with late effects of polio," *Plos one* 14, no. 10, 2019, e0224685.
- [6] T. Ghawana et al., "3D geospatial indoor navigation for disaster risk reduction and response in urban environment," *ISPRS Annals of Photogrammetry, Remote Sensing & Spatial Information Sciences*, 4, no. 4, 2018.
- [7] A. Mani Gupta, "Design of haptically enabled wheelchair for assistive autonomy," PhD diss., 2018.
- [8] Ugalde, Bernard H., Albert A. Vinluan, and Jennifer T. Carpio. "Graph representation of road network for mobility-impaired persons." 2021 IEEE 4th International Conference on Information and Computer Technologies (ICICT), 2021.
- [9] Ugalde, Bernard H., Albert A. Vinluan, and Jennifer T. Carpio. "An Optimal Route for People with Ambulant Disabilities Using Mathematical Risk Modeling and Analytic Hierarchy Process," *Smart Trends in Computing and Communications*. Springer, Singapore, 2022. 119-129.
- [10] Ugalde, Bernard, Albert Alcause Vinluan, and Jennifer Torres Carpio. "Wheelchair Navigation System using Node Combination Technique for People with Motor Disabilities," 2021 The 13th International Conference on Computer Modeling and Simulation. 2021.
- [11] S. Nedkov and S. Zlatanova, "Enabling obstacle avoidance for Google maps' navigation service," *Proceedings Gi4DM 2011: GeoInformation for Disaster Management*, Antalya, Turkey, 3-8 May 2011.
- [12] E. A. Shaikh and A. Dhale, "AGV path planning and obstacle avoidance using Dijkstra's algorithm," *International Journal of Application or Innovation in Engineering & Management (IJAIEM)*, 2, no. 6, 2013, 77-83.
- [13] A. Blattner et al., "Mobile indoor navigation assistance for mobility impaired people," *Procedia Manufacturing*, 3, 2015, 51-58.
- [14] S. B. Abdallah et al., "Augmented reality for real-time navigation assistance to wheelchair users with obstacles' management," In *International Conference on Computational Science*, pp. 528-534. Springer, Cham, 2019.
- [15] R. Azuma, "Overview of augmented reality," In *ACM SIGGRAPH 2004 Course Notes*, pp. 26-es. 2004.
- [16] B. B. Chua and L. E. Dyson, "Applying the ISO 9126 model to the evaluation of an e-learning system," in *Proc. of ASCILITE*, pp. 5-8. 2004.
- [17] S. Valenti et al., "Computer based assessment systems evaluation via the ISO9126 quality model," *Journal of Information Technology Education: Research*, 1, no. 1, 2002, 157-175.
- [18] R. R. Maaliw, K. A. C. Quing, A. C. Lagman, B. H. Ugalde, M. A. Ballera and M. A. D. Ligayo, "Employability prediction of engineering graduates using ensemble classification modeling", *IEEE 12th Annual Computing and Communication Workshop and Conference (CCWC)*, pp. 288-294, 2022.
- [19] R. R. Maaliw, J. B. Susa, A. S. Alon, A. C. Lagman, S. C. Ambat, M. B. Garcia, K. C. Piad, and M. C. Fernando-Raguro, "A deep learning approach for automatic scoliosis Cobb angle identification," *IEEE World Artificial Intelligence and Internet of Things Congress (AIIoT)*, pp. 111-117, 2022.
- [20] R. R. Maaliw, K. A. Quing, J. A. Susa, J. F. Marqueses, A. C. Lagman, R. T. Adao, M. C. Fernando-Raguro, and R. Canlas, "Clustering and classification models for student's grit detection in e-learning," *IEEE World Artificial Intelligence and Internet of Things Congress (AIIoT)*, pp. 39-45, 2022.



1 of 1

 [Download](#)
 [Print](#)
 [Save to PDF](#)
 [Add to List](#)
 [Create bibliography](#)
2022 IEEE 13th Annual Ubiquitous Computing, Electronics and Mobile Communication Conference, UEMCON 2022

- Pages 119 - 123 • 2022 • 13th IEEE Annual Ubiquitous Computing, Electronics and Mobile Communication Conference, UEMCON 2022 • Virtual, Online • 26 October 2022 through 29 October 2022 • Code 184850

Document type
 Conference Paper

Source type
 Conference Proceedings

ISBN
 978-166549299-7

DOI
 10.1109/UEMCON54665.2022.9965734

[View more](#)

Barrier-Free Routes in a Geographic Information System for Mobility Impaired People

Ugalde, Bernard H.^a ; Maaliw, Renato R.^b ;
 Palarimath, Suresh^a ; Al Mahri, Mohammed Bakheet^a ;
 Vinluan, Albert A.^c ; Carpio, Jennifer T.^d ; Lagman, Ace C.^e ;
 Panergo, Maurine C.^b

 [Save all to author list](#)
^a University of Technology & Applied Sciences, Dhofar, Salalah, Oman

^b Southern Luzon State University, College of Engineering, Quezon, Lucban, Philippines

^c New Era University, Quezon City, Philippines

^d University of Makati, Makati City, Philippines

[View additional affiliations](#)

 1 53rd percentile
 Citation in Scopus

 2.61
 FWCI

 1
 Views count

[View all metrics >](#)
[Full text options](#)
[Export](#)
Abstract**Abstract**

It is always difficult to travel alone in a wheelchair without prior knowledge of the accessibility of the planned route. The majority of people prefer the shorter route. On the other hand, those with ambulatory limitations may prefer a longer route with proper ramps and drop curbs. This study aims to design obstacle management so that a registered user can report the accessibility of a ramp. The research includes an algorithm for generating barrier-free routes on the derived graph paths. When a wheelchair user encounters an obstacle while navigating the suggested route, the algorithm redirects them to their destination. A simulation test was performed, and the entire approach was evaluated using the survey method. The results showed that the proposed routing algorithm could find the shortest paths and reroute users to an unobstructed path. Respondents were highly pleased with the proposed navigation system's performance and thought it was accessible, usable, and reliable. As a result, the study may provide a novel approach to designing a geographic information system for use in a wheelchair navigation system. © 2022 IEEE.

Author keywords

geographic information system; mobility-impaired person; obstacle management; optimization; routing algorithm; shortest-path

SciVal topics**Indexed keywords****Metrics****SciVal Topics** **Metrics****References (20)**
[View in search results format >](#)

All [Export](#) [Print](#) [E-mail](#) [Save to PDF](#) [Create bibliography](#)

1 Neis, P., Zielstra, D.

Generation of a tailored routing network for disabled people based on collaboratively collected geodata

(2014) *Applied Geography*, 47, pp. 70-77. Cited 42 times.

Cited by 1 document

I-Respond: Mobile Application for Emergency Response Using Dijkstra's Algorithm Shortest Path

Lagman, A.C. , De Angel, R. , Ramos, R.F. (2022) *2022 IEEE 14th International Conference on Humanoid, Nanotechnology, Information Technology, Communication and Control, Environment, and Management, HNICEM 2022*

[View details of this citation](#)

Inform me when this document is cited in Scopus:

[Set citation alert >](#)
Related documents

Implementation of Security Access Control using American Sign Language Recognition via Deep Learning Approach

Susa, J.A.B. , MacAlisang, J.R. , Sevilla, R.V. (2022) *ICETECC 2022 - International Conference on Emerging Technologies in Electronics, Computing and Communication*

A Machine Vision-Based Person Detection under Low-Illuminance Conditions Using High Dynamic Range Imagery for Visual Surveillance System

Susa, J.A.B. , Militante, S.V. , Acoba, A.G. (2022) *Proceedings of the 3rd International Conference on Smart Technologies in Computing, Electrical and Electronics, ICSTCEE 2022*

Deep Neural Network-Based Gender Identification for Surveillance Restroom Restriction System

Susa, J.A.B. , Doculan, J.A.D. , Merin, J.V. (2022) *ICETECC 2022 - International Conference on Emerging Technologies in Electronics, Computing and Communication*

[View all related documents based on references](#)

Find more related documents in Scopus based on:

[Authors >](#) [Keywords >](#)

All



ADVANCED SEARCH

Conferences > 2022 IEEE 13th Annual Ubiquit... ?

Barrier-Free Routes in a Geographic Information System for Mobility Impaired People

Publisher: IEEE

Cite This

PDF

Bernard H. Ugalde ; Renato R. Maaliw ; Suresh Palarimath ; Mohammed Bakhit Al Mahri ; ... All Authors

59

Full

Text Views

**Abstract****Abstract:**

It is always difficult to travel alone in a wheelchair without prior knowledge of the accessibility of the planned route. The majority of people prefer the shorter route. On the other hand, those with ambulatory limitations may prefer a longer route with proper ramps and drop curbs. This study aims to design obstacle management so that a registered user can report the accessibility of a ramp. The research includes an algorithm for generating barrier-free routes on the derived graph paths. When a wheelchair user encounters an obstacle while navigating the suggested route, the algorithm redirects them to their destination. A simulation test was performed, and the entire approach was evaluated using the survey method. The results showed that the proposed routing algorithm could find the shortest paths and reroute users to an unobstructed path. Respondents were highly pleased with the proposed navigation system's performance and thought it was accessible, usable, and reliable. As a result, the study may provide a novel approach to designing a geographic information system for use in a wheelchair navigation system.

Document Sections**I. Introduction****II. Review of Related Literature****III. Methodology****IV. Results and Findings****V. Conclusions and Recommendations****Authors**

Published in: 2022 IEEE 13th Annual Ubiquitous Computing, Electronics & Mobile Communication Conference (UEMCON)

Figures**References**

Date of Conference: 26-29 October 2022

INSPEC Accession Number: 22359001

Keywords**DOI:**

Date Added to IEEE Xplore: 01 December 2022

[10.1109/UEMCON54665.2022.9965734](https://doi.org/10.1109/UEMCON54665.2022.9965734)

Metrics

Publisher: IEEE

ISBN Information:

Conference Location: New York, NY, NY, USA

I. Introduction

Traveling alone in a wheelchair without prior knowledge of the accessibility of the intended route is often a problem [1]–[3]. Ordinary people typically take the shortest route, but people with motor disabilities may prefer a long way without an uphill. They cannot make quick decisions due to cognitive challenges in the field. They usually try to remember routes and information about accessibility in each area they visit. This strategy can prove problematic in the future, especially if they

Need Full-Text

access to IEEE Xplore
for your organization?

[CONTACT IEEE TO SUBSCRIBE >](#)

More Like This

Research on Navigation Method in 3D Geographic Information System for Water Conservancy Projects of Large Basin

2008 International Workshop on Education Technology and Training & 2008 International Workshop on Geoscience and Remote Sensing
Published: 2008

Road information systems; impact of geographic information systems technology to automatic vehicle navigation and guidance

Conference Record of papers presented at the First Vehicle Navigation and Information Systems Conference (VNIS '89)

Published: 1989

[Show More](#)



IEEE Access is celebrating its 10 Year Publishing Anniversary!

View the top 10 articles published over the last decade based on downloads,

citations, and overall impact in IEEE fields of interest.

[View Articles](#)

Authors

Bernard H. Ugalde

University of Technology & Applied Sciences, Salalah, Dhofar, Sultanate of Oman

Renato R. Maaliw

College of Engineering, Southern Luzon State University, Lucban, Quezon, Philippines

Suresh Palarimath

University of Technology & Applied Sciences, Salalah, Dhofar, Sultanate of Oman

Mohammed Bakhit Al Mahri

University of Technology & Applied Sciences, Salalah, Dhofar, Sultanate of Oman

Albert A. Vinluan

New Era University, Quezon City, Philippines

Jennifer T. Carpio

University of Makati, Makati City, Philippines

Ace C. Lagman

Information Technology Dept., FEU Institute of Technology, Manila, Philippines

Maurine C. Panergo

College of Engineering, Southern Luzon State University, Lucban, Quezon, Philippines

Figures



References



Keywords



Metrics



IEEE Personal Account

[CHANGE
USERNAME/PASSWORD](#)

Purchase Details

[PAYMENT OPTIONS](#)
[VIEW PURCHASED
DOCUMENTS](#)

Profile Information

[COMMUNICATIONS
PREFERENCES](#)
[PROFESSION AND EDUCATION](#)
[TECHNICAL INTERESTS](#)

Need Help?

US & CANADA: +1 800 678 4333
WORLDWIDE: +1 732 981 0060
[CONTACT & SUPPORT](#)

Follow

FACULTY POSITION RECLASSIFICATION FOR SUCS

(DBM-CHED Joint Circular No. 3, series of 2022)



CERTIFICATION OF PERCENTAGE CONTRIBUTION

(Research Output with Multiple Authors)

Title of Research: Barrier-Free Routes in a Geographic Information System for Mobility Impaired People

Type of Research Output: Conference Paper (Scopus-Indexed, IEEE Paper)

Instruction: Supply ALL the names of the authors involved in the publication of Research output and indicate the contribution of each author in percentage. Each author shall sign the conforme column if he/she agrees with the distribution. The conforme should be signed by all the authors in order to be considered. Please prepare separate Certification for each output.

	Author Name	Percentage Contribution	Signature
1	Bernard Ugalde	35%	
2	Renato R. Maaliw III	25%	
3	Suresh Palamarith	10%	
4	Mohammed Bakhit Al Mahri	10%	
5	Alvin A. Vinluan	5%	
6	Jennifer T. Carpio	5%	
7	Ace C. Lagman	5%	
8	Maurine C. Panergo	5%	
	<i>* Should have a total of 100%</i>	100.00%	

Prepared by:


Renato R. Maaliw III, DIT
(Name and Signature)
Faculty

Certified by:


Nicanor L. Guinto, Ph.D.
(Name and Signature)
Director, Office of Research Services