

# An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection

Renato R. Maaliw III

*College of Engineering*

*Southern Luzon State University*

*Lucban, Quezon, Philippines*

[rmaaliw@slsu.edu.ph](mailto:rmaaliw@slsu.edu.ph)

Ace C. Lagman

*Information Technology Dept.*

*FEU Institute of Technology*

*Manila, Philippines*

[aclagman@feutech.edu.ph](mailto:aclagman@feutech.edu.ph)

Zoren P. Mabunga

*College of Engineering*

*Southern Luzon State University*

*Lucban, Quezon, Philippines*

[zmabunga@slsu.edu.ph](mailto:zmabunga@slsu.edu.ph)

Manuel B. Garcia

*Information Technology Dept.*

*FEU Institute of Technology*

*Manila, Philippines*

[mbgarcia@feutech.edu.ph](mailto:mbgarcia@feutech.edu.ph)

Maria Rossana D. De Veluz

*College of Engineering*

*Southern Luzon State University*

*Lucban, Quezon, Philippines*

[mrdveluz@slsu.edu.ph](mailto:mrdveluz@slsu.edu.ph)

Alvin S. Alon

*Digital Transformation Center*

*Batangas State University*

*Batangas City, Philippines*

[alvin.alon@g.batstate-u.edu.ph](mailto:alvin.alon@g.batstate-u.edu.ph)

Rhowel M. Dellosa

*Research and Development Office*

*University of Northern Philippines*

*Vigan City, Philippines*

[rhowel.dellosa@unp.edu.ph](mailto:rhowel.dellosa@unp.edu.ph)

**Abstract**—Diabetic retinopathy is a serious complication needing prompt diagnosis and medication to avert vision loss. Lesions caused by the condition are difficult to track because they are hidden behind the eye's structure in small and subtle forms. To extract relevant features, we created a robust pipeline using multiple preprocessing techniques, image segmentation architecture (DR-UNet) with atrous spatial pyramid pooling, and an attention-aware deep learning convolutional network with different modules based on ResidualNet. Empirical results show that our framework has segmentation accuracies of 87.10% (intersection over union) and 84.50% (dice similarity coefficient). Moreover, classification performance of 99.20% provided better results than existing schemes, as reinforced by the smooth convergence of training/validation loss and accuracy. This study has the potential to supplement traditional diagnosis to identify better the ailment in its early and advanced stages.

**Keywords**—attention-aware DCNN, atrous spatial pyramid pooling, blindness, fundus images, lesion detection, ophthalmology

## I. INTRODUCTION

Excessive sugar levels in the blood cause severe harm to body organs resulting in life-threatening illnesses if left unchecked. Diabetic retinopathy (DR) is a medical disorder affecting people with diabetes. It can be either mild (DR-NP, non-proliferative) or severe (DR-P, proliferative). At first, a person with DR-NP experiences blurred vision. However, as the condition progresses, new blood vessels (BV) emerge in the retina, further debilitating visual acuity. The complications from these leaks and bleeding trigger DR. At its worst, the disease causes complete obstruction of the BV, manifesting as various lesions. The most noticeable lesions are microaneurysms, the earliest indications of DR, and appear as little scattered dots with a round shape on fundus images, as depicted in Fig. 1(a) and Fig 1(b). At present, an ophthalmologist manually evaluates the scans to spot the abnormalities. An automated prognosis system can replace the technique to determine conditions rapidly and reliably. Both supervised and unsupervised approaches have been explored in the pursuit of highly accurate outcomes. Deep learning (DL) techniques are applied at the pixel level to recognize and segment retinal pictures. Convolutional neural networks

(CNN) are used in deep learning. They are made up of interconnected ‘neurons’ of multiple layers and have widespread utilization in pattern recognition and image processing.

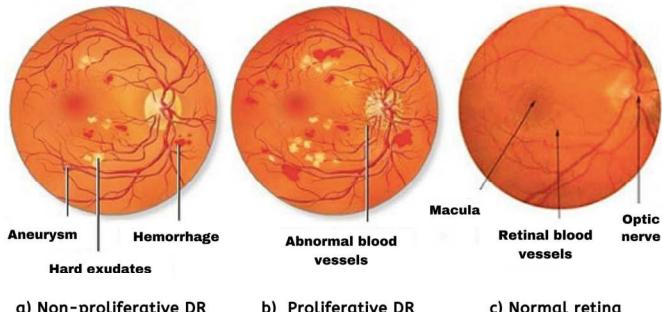


Fig. 1. Diabetic retinopathy cases (a & b) and normal retina (c) [1].

Fundus image-based pathological screening is an emerging study area in modern healthcare diagnostics. Experts in computer vision are starting to pay significant attention to the automated detection of DR. Since the segmentation’s output is critical to classification success, it has been the subject of numerous papers. In their research, authors [2] outlined a method for accurately segmenting images of the retinal fundus in two phases through pre and post-processing of images via maximum principal curvature. Using mathematical morphology, proponents [3] segmented BV to assess and extract retinal image features using a smoothing technique. It effectively suppresses background information, while a K-means clustering algorithm improves the image quality. The method is compared to other alternative solutions achieving 95.10% precision evaluated on the DRIVE dataset. Scientists [4] introduced a segmentation framework to distinguish BV based on extended descriptions to address the difficulties of variations with thin and elongated morphologies. Its model training is done so that parameters are automatically learned by a support vector machine (SVM). The work by [5] aims to apply enhancement techniques to quantify the properties of optic BV. Partitioning was accomplished using three essential processes such as multi-scale analytics (MA), morphological geometry (MG), and Gaussian methods (GM). MG excels in

pinpointing the delicate intricacies of blood veins. If combined with image transformation and discriminant analysis, the MA was optimal because it can distinguish between large and small arteries without any background noise. At the same time, GM was potent in identifying thick vessels. Researchers [6] demonstrate automatic retinal vascular splitting using c-means (fuzzy) segmentation and intensity ranges. Restricted dynamic histogram normalization raised the contrast of retinal scans. At the same time, mathematical morphology approaches and matching filtering sequences through Frangi & Gabor filters boosted the clustering. The initial blood vein network is extracted based on a genetic algorithm utilizing an extended spatial fuzzy c-means scheme. An integrated level set enhances the segmentation, achieving an accuracy of 96.10%. A solution that shortens the amount of time needed for calculations while maintaining high accuracy and improving sensitivity compared to the Frangi method is presented by [7]. During its process, they tried to prevent potential problems (e.g., specular reflexes) using two open access (DRIVE & STARE) datasets with 93% and 95% precisions.

According to the literature, there are three popular segmentation schemes such as watershed transform (WST), super pixels (SP) & active contour (AC). The WST is a known and robust unsupervised algorithm capable of handling many image partitioning challenges. However, in some instances, it tends to excessively segment the original images as the technique is sensitive to noise and contrast leading to incorrect results [8]. SP enables image over-segmentation by arranging pixels into monolithic clusters based on derived characteristics (e.g., texture, intensity & other related features). Each pixel of the same region is represented on a map considering both local and nonlinear deformations. This process allows efficiency by minimizing mistakes of assigning wrong labels in making super pixel-based features with low computation and memory usage [9]. Conversely, AC is good at acquiring regions of interest (ROI) in medical images. It uses edge and region-based models to locate edge information, set the approximate shape boundaries, and compute sub-regions based on optimal fitness [10], respectively.

There are multiple papers on identifying and categorizing DR in fundus images. For instance, [11] demonstrates an alternative morphological function that emphasizes optical disc (Opt-D) recognition. They attained specificity and sensitivity of 88% and 94%. Authors [12] offer unsupervised retinal Opt-D histogram-based template fitting detection techniques comprising three phases: fine-tuning, centroid, and boundary identification. Other hemorrhage research has been conducted without segmentation or ROIs, utilizing retinal characteristics as features and classified by partial least square [13]. Data scientist [14] presented an iterative technique for enhanced BV detection utilizing Opt-D algorithms in five steps, with fovea localization as one of its strengths. A machine learning approach aiding DR identification was developed by [15]. They validated the results from thousands of eye scans (MESSIDOR dataset) with the macula as the primary priority. A kappa ( $\kappa_p$ ) value compared two out of

three doctor's in grading DR against the machine learning performance with a mean average accuracy of 90%. With the same data, researchers [16] proposed a four-layered CNN starting with preprocessing, transformation, and normalization of input images. The effect was a quality improvement in DR grading accomplished via clustering with accuracy of 82%. Finally, the probe of [17] devised a hybrid method to develop a hybrid pipeline using Hough transformation and CNN to detect fluids (exudates) leaking from BV. It calculates the categorization using pixel probabilities. The reliability of their assessments based on three public datasets (DiaretDB0, DiaretDB1 & DrimDB) averages 98% accuracy. Several models used deep learning (neural networks) for DR diagnostics based on recent publications. Attention-aware mechanism [18], multi-task [19] & self-attention CNNs [20], and auto encoders [21] provides optimized processes representation sharing during modeling, thus improving the overall rate of classification. Moreover, it includes histogram equalization and sparse filters that automatically extracts different features from fundus images. Other benchmarks [22] utilize long short-term memory networks (LSTM) to enhance classification performance further. Parameter reduction was explored by [23] by modifying the residual pathways of networks via sampling modules for challenging datasets.

Each method stated in the literature has its advantages but we are confident that there are still gaps in the exactitude of early lesion detection. In the advanced stage of DR, noticeable vascular growth markings are conveyed easily by the current state-of-the-art image processing techniques. However, this is not the case for mild conditions, which may not have enough signs and proliferations of the eye's vascular abnormalities using only the naked eye. As a contribution to science, our proposed novel pipeline comprises extensive preprocessing techniques; enhanced segmentation algorithms with atrous spatial pyramid pooling (ASPP) for extracting the maximum lesion features efficiently, and a modularized attention-aware deep CNN architecture (DCNN) for DR classification. This study can assist ophthalmologists in reliably predicting its progression at the earliest possible time to give patients the necessary and proper treatment to prevent permanent blindness.

## II. METHODOLOGY

### A. Datasets and Preprocessing

We collected 388 high-resolution retinal images divided into two equally independent groups. The first set contains 194 data exhibiting DR (DiaretDB0 & DiaretDB1), while the other includes 25 healthy eyes. Due to an imbalance ratio of 7:1, we acquired 169 additional non-DR images from various sources [24] to solve these vast discrepancies. In order to improve training and validation of deep learning models, it is crucial to have a well-balanced dataset to prevent under and over-fitting during training. Moreover, all images are converted to 1440 x 900 pixels to compensate for size difference then normalized into 512 x 512 pixel images after background cropping. Fig. 2 shows excerpts of sample images annotated by medical experts.

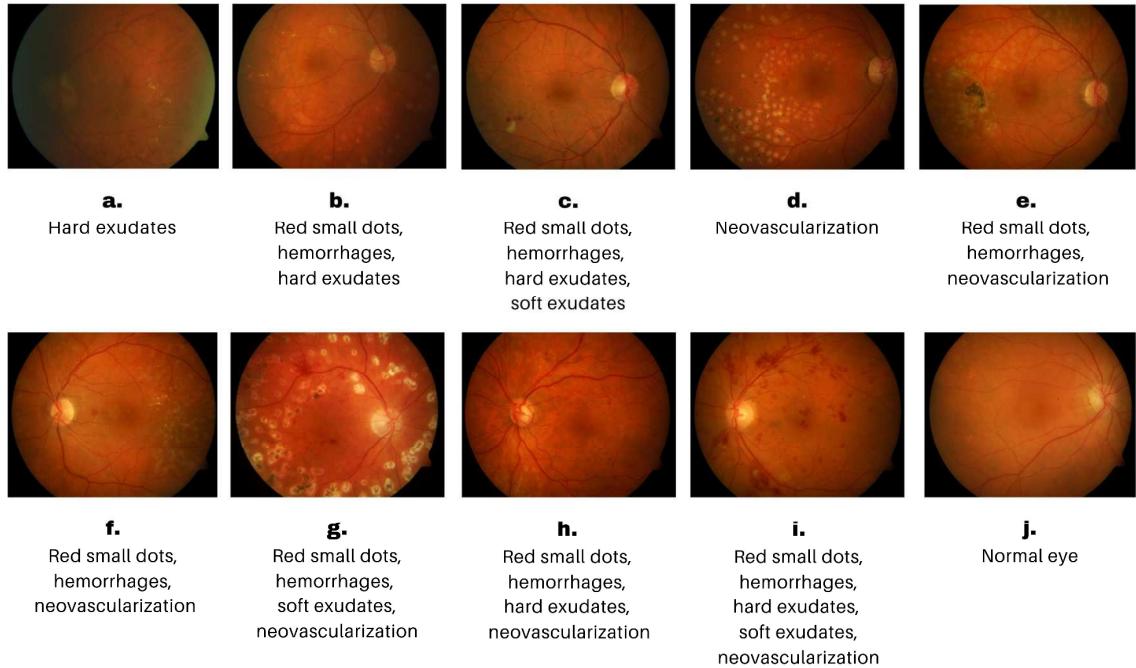


Fig. 2. Excerpts of fundus images showing examples of diabetic retinopathy (a – i) and normal eye (j) [24].

### B. Data Augmentation

Inadequate medical images for training can make it hard to improve pattern recognition as it affects how well a machine learning model can perform. Therefore, data expansion is necessary to increase the size of the dataset by artificial means to achieve robustness and generalization. We applied geometric transformations such as flipping (vertical & horizontal) and rotations (45 & 135 degrees) to produce additional 1552 synthetic data with a total of 1940 images, 970 for each class. Through this process, it can help improve the robustness and generalization ability of the model to make accurate predictions. Lastly, we divided the dataset into training (80%), testing (20%), and excluded ten early case DR samples using a 10-fold cross-validation.

### C. Color Adjustments for Maximum Feature Extraction

When processing images, color calibration is vital since it enriches the visual quality and suits a specific context or application. Our strategy is to convert each image to grayscale to reduce data size to cut computation time by a factor of 0.2815 using the values red (R) = 0.27, green (G) = 0.56, and blue (B) = 0.17 (Fig. 3). Moreover, this also increases training time efficiency during test runs.

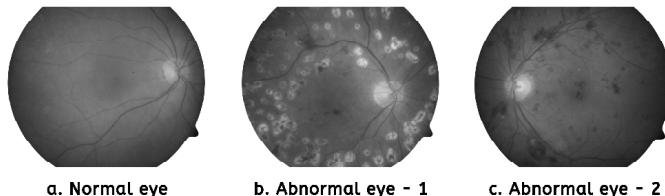


Fig. 3. Sample grayscaled fundus images, normal (a) and abnormal (b & c).

It is obvious to give emphasis to the red channels to highlight blood vessels and clots but this is not the case

according to our observations. Instead, we prioritized the green colors over the red and blue channels with a second adjustment of R = 0.28, G = 0.57, and B = 0.15 as it reveals more details. Fig. 4 illustrates the comparative color shift prioritization.

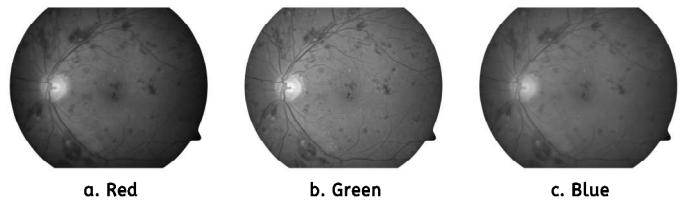


Fig. 4. Prioritizing the green channel produced finer and greater information (b) than the other channels (a & c).

### D. Enhanced Segmentation Technique

Retinal image segmentation is an indispensable process that helps diagnose DR. It locates specific areas that are hard to see otherwise. This study aims to divide the visuals into pixels or regions concerning the optic disc, BV, lesions (hemorrhages), exudates, and microaneurysms using semantic segmentation. We modified the U-Net architecture to address this dilemma because the original design was ineffective in our segmentation contexts after several tests.

Our framework comprises three major parts: encoder, bottleneck, and decoder (Fig. 5) similar to the article by [25] but with additional mechanics. The encoder with four blocks (BLK) is on the left, with the first receiving the input images and the subsequent BLK receiving the previous output with a lower subsampled resolution. Its initial BLK comprises three convolutions, the first two layers having 32 feature maps (FM) and 64 in the third. The same structure is observed in the second unit but with 64 and 128 FM on its layers while the remaining BLKs (3<sup>rd</sup> and 4<sup>th</sup>) offer only two convolutions

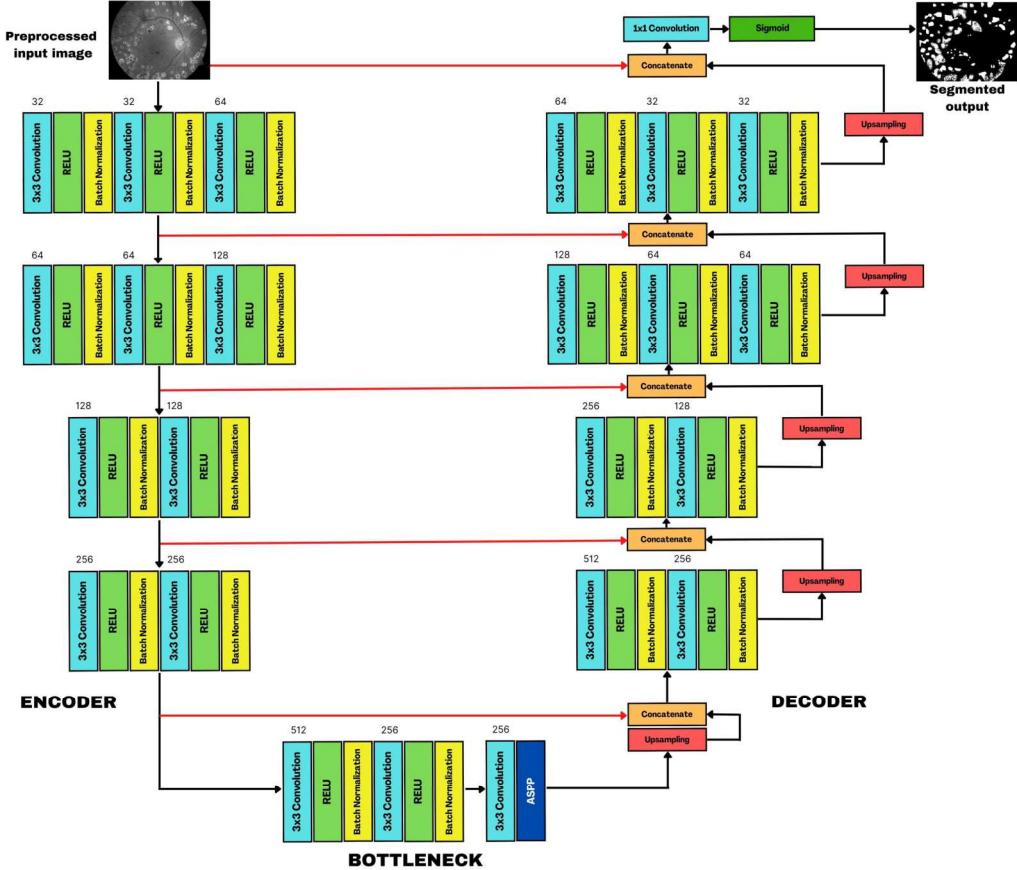


Fig. 5. Proposed DR-UNet for lesion segmentation for detection of diabetic retinopathy in fundus images with three parts (encoder, bottleneck & decoder).

while doubling subsampled FM at 128 and 256. A *Maxpooling* (MXP) operation is executed at the end of each BLK to decrease the input's sample size while keeping most details. Before each MXP layer, the preservation of a duplicate copy connects the contraction to the expansion path leading to precise segments.

The decoder on the right side mirrors the encoder but includes an upsampling (2D) at the end. Its feature map decreases by half from the previous block during each sampling stage. Furthermore, the red arrows (Fig. 5) recreate the FM previously stored before each maximum clustering layer in each encoder block and compare these with the decoder's oversampled outputs. We applied subsampling at the end of the decoder block to improve the ability to detect retinal hemorrhages, further enhanced by concatenating the input image with the network results. To complete the process, a final convolution ( $1 \times 1$  kernel) and a sigmoid activation function compute the maps' outcomes.

In the middle of the architecture is a bottleneck connecting the two pathways with two convolutions ( $3 \times 3$  kernel,  $MXP = 2 \times 2$  kernel & stride = 2) for enriching and easing FMs. Rectified learning unit (RELU) followed by batch normalization (BN) is a standard configuration used to stabilize network weights and avoids gradient degradation. We also introduced ASPP to improve the training speed further for a large dataset. It increases the receptive field for capturing finer details of the input without raising the number of

parameters leading to segmentation efficiency.

#### E. A Modified Attention-Aware Deep Convolutional Neural Network Architecture

The ability of a model to zero in on specific parts instead of equally treating the entire image makes attention-aware deep neural networks invaluable. Certain features are undoubtedly more crucial than others in identifying DR, which is particularly useful. Our network was built of three sections: segmentation adjustment (SA), lesion-conscious (LC), and DR detection sub-networks based on ResidualNet (*RNet*) and *MaskRCNN* [26].

The SA identified the overall segmentation fitting with pre-trained weights on *ImageNet* initialized on *RNet* to create the base network. Each selection was subtly adjusted for contraction to prevent over segmentation that may cause irregularities. Then, the LC generates mask images to identify different lesions existing in retinal images via quadrant search. As part of this section, we used non-maximal suppression to select the most objective bounding box with the highest accurate scores from among several predicted ones. The process continues until the completion of all boxes. Ultimately, the DR classifications are generated thru combined characteristics from SA and LC. The pre-trained DR-based network fused with the attribute extractor of the LC collects a more detailed and granular representations, conserving needed image information. Fig. 6 exhibits the classification pipeline.

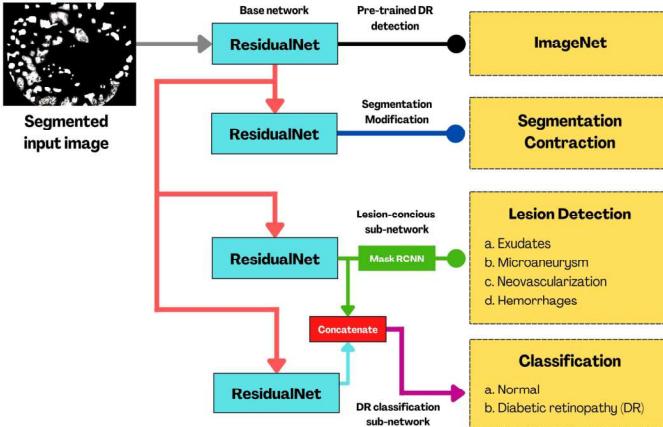


Fig. 6. An attention-aware deep convolutional neural network with three sub-networks for detection of diabetic retinopathy.

#### F. Evaluation Metrics

To assess the quantitative reliability of segmentation, we used intersection over union (*IoU*) that calculates the ground truth (G) and the algorithm's results (R) by dividing the intersection of two datasets. Another measurement is the Dice similarity coefficient (*DSC*) equivalent which measures the overlaps of two datasets by dividing the sum of the first and second sets with values ranging between 0 and 1. A value of 1 means it is perfectly identical; otherwise, it is not. Equations 1 and 2 display the formulas:

$$IoU = \frac{|G \cap R|}{|G| + |R| - |G \cap R|} \quad (1)$$

$$DSC = \frac{2|G \cap R|}{|G| + |R|} \quad (2)$$

For classification measurements, we evaluated the performance of the deep learning architecture in terms of accuracy, precision, sensitivity, and specificity. These are standard benchmarks in machine learning, as summarized by true positives (TP) and true negatives (TN), false positives (FP), and false negatives (FN) denoted in Equations 3 to 6:

$$Accuracy (AC) = \frac{TP + TN}{TP + TN + FP + FN} \quad (3)$$

$$Precision (PR) = \frac{TP}{TP + FP} \quad (4)$$

$$Sensitivity (SE) = \frac{TP}{TP + FN} \quad (5)$$

$$Specificity (SP) = \frac{TN}{TN + FP} \quad (6)$$

### III. RESULTS

We conducted the experiments using the fastest computer available with a Core-i9 processor (8 cores, 3.60 GHz, 16 MB cache, 16 threads), 64 GB RAM, and a graphics processing unit (RTX390Ti, 1.86 GHz & 24 GB). *Keras* and *TensorFlow*

libraries allowed the creation of the models in a structured and efficient manner. The succeeding section outlines the results.

#### A. Attention-Aware DCNN's Hyperparameters Optimization

For a model to work effectively, adjusting the hyperparameters is essential. These settings unlike parameters are set before modeling. We utilized a Bayes search optimization technique to lessen the time-consuming process of manual configuration through trial and errors. Table I shows the fine-tuned options.

TABLE I. ATTENTION-AWARE DCNN'S OPTIMIZED CONFIGURATIONS

Hyperparameters	Settings
Batch size	16
Decay	0.001 per epoch
Environment	GPU
Epoch	100
Loss	Cross-entropy (Binary)
Learning rate	0.001
Optimizer	ADAM
Shuffling	Per epoch

#### B. Segmentation Performance

Table II compared the results of our modified segmentation framework (DR-UNet) with the original U-Net and Res-UNet using 50 random images with different severities of DR. The results show that DR-UNET outperforms the other models with IoU and DSC mean scores of 0.871 and 0.845 in multiple folds, respectively. This demonstrates that our technique can represent identified lesions accurately with reference to the ground truth. Fig. 7 provides examples of the performance of our networks versus the ground truth.

TABLE II. COMPARATIVE SEGMENTATION EVALUATIONS

K-fold	DR-UNET		U-NET		RES-UNET	
	IoU	DSC	IoU	DSC	IoU	DSC
1	0.863	0.850	0.721	0.778	0.803	0.818
2	0.882	0.849	0.713	0.743	0.799	0.815
3	0.861	0.843	0.749	0.734	0.813	0.809
4	0.863	0.842	0.811	0.789	0.821	0.813
5	0.871	0.848	0.789	0.812	0.834	0.814
6	0.872	0.853	0.748	0.803	0.817	0.821
7	0.874	0.847	0.758	0.787	0.818	0.820
8	0.861	0.842	0.748	0.791	0.809	0.818
9	0.889	0.839	0.801	0.813	0.818	0.826
10	0.878	0.841	0.812	0.812	0.805	0.821
Mean	<b>0.871</b>	<b>0.845</b>	0.765	0.786	0.813	0.817

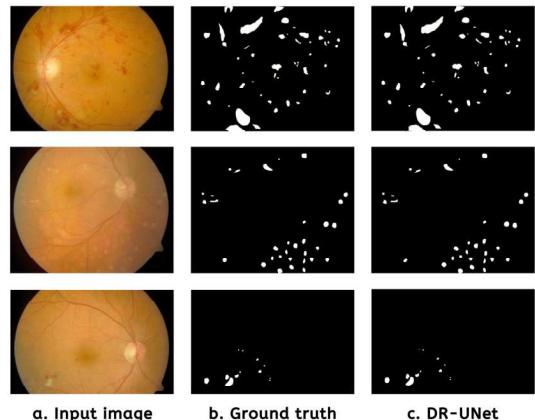


Fig. 7. Segmentation comparison of ground truth vs. DR-UNet.

### C. Classification Performance

Table III gauged the performance of our framework to various methods such as conventional DL, ensembles, lesion isolation, multi-sieving, modified *AlexNet*, circular Hough-CNN, and Hessian matrix with altered CNN features. Our proposed pipeline obtained accuracy, precision, sensitivity, and specificity based on the results with 0.992, 0.989, 0.994, and 0.989, respectively. The results had a marked average accuracy increase of 5.64% among existing methods.

TABLE III. COMPARATIVE PERFORMANCE AGAINST DIFFERENT TECHNIQUES

Approach	AC	PR	SE	SP
Conventional DL [27]	0.861	0.790	0.840	0.820
Ensembles [28]	0.869	0.803	0.881	0.855
Lesion isolation [29]	0.920	0.820	0.88	0.831
Multi-Sieving [30]	0.961	0.814	0.978	0.921
Modified AlexNet [31]	0.966	0.953	0.953	0.973
Circular Hough – CNN [17]	0.985	-	0.996	0.982
Hessian matrix + CNN with squeeze, excitation & bottleneck [18]	0.987	0.972	0.996	0.982
Proposed DR-UNet with ASPP + Attention-aware DCNN	<b>0.992</b>	<b>0.989</b>	0.994	<b>0.989</b>

A confusion matrix in Table IV shows that DR detection performs better than normal eye categorization, but with only one error difference.

TABLE IV. CLASSIFICATION CONFUSION MATRIX  
(TRAINING = 1930, TESTING = 386 WITH HOLDOUT = 10)

	Normal	DR
Normal	191	2
DR	1	192

We also tested ten fundus images exhibiting early signs of DR to quantify if our model can empirically distinguish the abnormality. The machine identified nine out of ten instances of early DR, illustrated in Fig. 8.

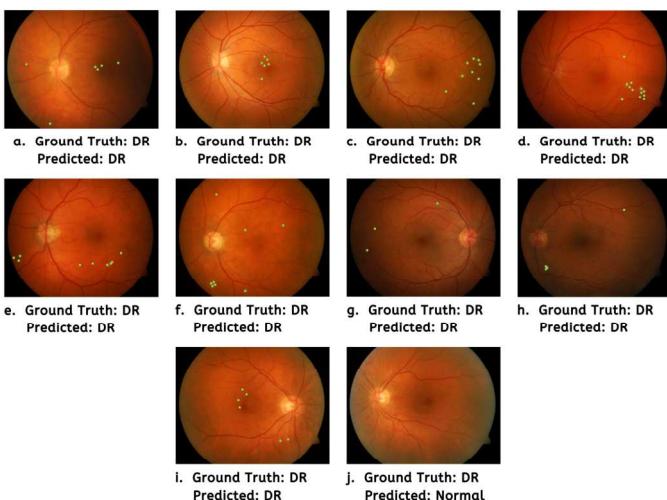


Fig. 8. The amplified segmentation technique and attention-aware DCNN recognized early signs of DR (a-i) except for (j).

### D. Model Training-Validation Loss and Accuracy

As shown in Figure 9(a), both the training and validation loss decreased steadily during the initial stages of the iteration process. These values eventually reached a stable point at the 85th epoch, yielding impressive results. It suggests that our model is effectively fitting the training and validation data. On the next graph, Figure 9(b) reveals an incremental increase in both training and validation accuracy for each epoch. This demonstrates the ability of our proposed DCCN to learn and extract important features from fundus images for diabetic retinopathy classification. Additionally, the convergence of the two lines in both graphs indicates that our modified neural network is neither under nor overfitting.

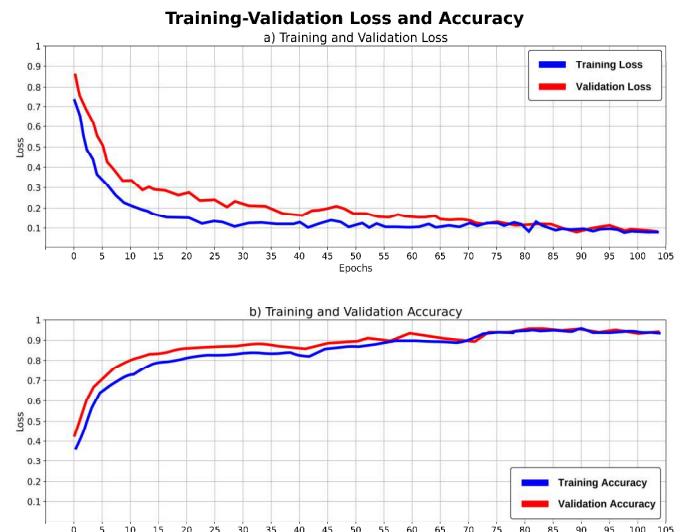


Fig. 9. A gradual convergence are achieved indicating no signs of under or overfitting.

### IV. DISCUSSIONS

This study introduced an enhanced segmentation technique and attention-aware DCNN for identifying DR. Based on benchmarks, our DR-UNet with ASPP mechanism outperforms standard U-Net and Res-UNet architecture with IoU and DSC values of 0.871 and 0.845 against the ground truths - a mean improvement of 0.082 and 0.043, respectively. We also verified the robustness of our classification model based on combined training and highly augmented datasets. Compared with different techniques, our proposed network attained higher performance on various metrics by introducing multiple sub-networks - a proven effective strategy for high-level attribute abstractions (accuracy = 99.20%). Furthermore, the model's exceptional performance was validated by its capability to detect DR's early signs according to the validation sets. Lastly, training/validation loss and accuracy plots exhibited a slow but gradual and smooth converging learning rate. Our research has made significant progress in automated medical image processing, building on the work of the advancement in data science [32 – 45].

While conducting this research, we encountered a common challenge of working with noisy and low-quality fundus images that can lead to segmentation and classification errors.

Despite these obstacles, we did not examine methods for improving image quality, such as ‘image dehazing’ and spatial filtering.

## V. CONCLUSIONS AND FUTURE WORKS

DR is a severe consequence of diabetes that can cause significant vision loss or even blindness if not detected and treated properly. One of the main reasons the eye’s abnormality is hard to diagnose is that it does not often indicate noticeable symptoms. Consequently, affected individuals become aware only once it progresses to the advanced stage. Multiple attempts have been conducted to automate the prognosis using various artificial intelligence-based approaches. However, there is still room for improvement. We developed two strategies to boost lesion detection in DR. Primarily, an enhanced segmentation framework (DR-UNet) with the integration of an ASPP block that extracts more relevant information and discards irrelevant regions from the fundus images. Nevertheless, we observed that it is prone to over-segmentation. To compensate for this dilemma, we incorporated a sub-network in our attention-aware DCCN classifier to contract the lesion segments before classification for adjusted fitting. More importantly, the stacks of RNets with pre-trained base, segment contraction, lesion-conscious (with *MaskRCNN*), and concatenation networks proved to be robust in DR’s identification, including on its onset.

Our research significantly contributed to the medical image prognosis to identify DR automatically and non-invasively. Artificial intelligence can be a valuable tool in the healthcare industry. However, it should be considered as a supplement to human expertise. Instead, it is most effective when combined with traditional healthcare practices to provide individuals with the most comprehensive care possible. By consolidating the strengths of both approaches, we can create a healthcare system that is more efficient and effective at meeting the patients’ needs. The proponents intend to classify DR based on severity and design a better architecture in the future.

## DATASETS LINKS

DIARETDB0 (<https://bit.ly/3H4guBE>), DIARETDB1 (<https://bit.ly/3J9O8bO>), FIRE (<https://bit.ly/3Ja3oFL>), and DRIVE (<https://bit.ly/3J4PiFI>).

## REFERENCES

- [1] New England Retina Associates, “Diabetic retinopathy and its kinds”, Available at: <https://www.retinamd.com/diseases-and-treatments/retinal-conditions-and-diseases/diabetic-retinopathy/>, 2022.
- [2] N. Santosh and Y. Radhika, “Optimized maximum principal curvatures based segmentation of blood vessels from retinal images”, Biomedical Research, 2019.
- [3] G. Hassan, Nashwa El-Bendary, A. Hassanien, A. Fahmy, M. Shoeb and V. Snasel, “Retinal blood vessel segmentation approach based on mathematical morphology,” Procedia Computer Science, vol. 65, pp. 612-622, 2015.
- [4] J. Orlando, E. Prokofyeva and M. Blaschko, “A discriminatively trained fully connected conditional random field model for blood vessel segmentation in fundus images,” IEEE Transactions of Biomedical Engineering, 64(1), pp. 16-27, 2017.
- [5] R. Manjula Sri, J. Jyothirmayi and D. Swetha, “Analysis of retinal blood vessel segmentation in different types of diabetic retinopathy,” International Journal of Engineering and Advanced Technology, 8(2), pp. 1-4, 2019.
- [6] N. Memari, A. Ramli, M. Saripan, S. Mashohor and M. Moghbel, “Retinal blood vessel segmentation by using matched filtering and fuzzy C-means clustering with integrated level set method for diabetic retinopathy assessment,” Journal of Medical and Biological Engineering, pp. 713-731, 2019.
- [7] A. Budai, R. Bock, A. Maier, J. Hornegger and G. Michelson, “Robust vessel segmentation in fundus images,” International Journal of Biomedical Imaging, 154860, pp. 1-11, 2013.
- [8] A. Garifullin, L. Lensu and H. Uusitalo, “Deep Bayesian baseline for segmenting diabetic retinopathy lesions: Advances and challenges,” Computers in Biology and Medicine, 136, 104725, 2021.
- [9] Z. Tian, L. Liu, Z. Zhang and B. Fei, “Superpixel-based segmentation for 3D prostate MR images,” IEEE Transactions of Medical Imaging, 35 (3), pp. 791–801, 2015.
- [10] D. Nguyen, S. Benamour, M. Mignotte and F. Lavoie, “Superpixel and multi-atlas based fusion entropic model for segmentation of X-ray images,” Medical Image Analysis, vol. 48, pp. 58-74, 2018.
- [11] S. Selvaperumal and R. Bhoopalan, “An efficient approach for the automatic detection of hemorrhages in colour retinal images,” IET Image Processing, pp. 1550-1554, 2018.
- [12] R. Chalakkal, W. Abdulla and S. Thulaseedharan, “Automatic detection and segmentation of optic disc and fovea in retinal images,” IET Image Processing, pp. 2100-2110, 2018.
- [13] A. Benzamin and C. Chakraborty, “Detection of hard exudates in retinal fundus images using deep learning,” Joint 7th International Conference on Informatics, Electronics & Vision (ICIEV) and 2nd International Conference on Imaging, Vision & Pattern Recognition (icIVPR), Kitakyushu, Japan, 2018, pp. 465–469, 2018.
- [14] S. Kumar, A. Adarsh, B. Kumar and A. Singh, “An automated early diabetic retinopathy detection through improved blood vessel and optic disc segmentation,” Optics & Laser Technology, vol. 121, pp. 1-11, 2020.
- [15] P. Shah, D. Mishra, M. Shanmugam, B. Doshi, H. Jayaraj and R. Ramanjulu, “Validation of deep convolutional neural network-based algorithm for detection of diabetic retinopathy – artificial intelligence versus clinician for screening,” Indian Journal of Ophthalmology, 68(2), pp. 398-405, 2020.
- [16] M. Andonova, J. Pavlovicova, S. Kajan, M. Oravec and V. Kurilova, “Diabetic retinopathy screening based on CNN,” International Symposium ELMAR, pp. 51-54, 2017.
- [17] Kemal Adem, “Exudate detection for diabetic retinopathy with circular hough transformation and convolutional neural networks”, Expert Systems with Applications, vol. 114, pp. 289-295, 2018.
- [18] S. Das, K. Kharbanda, Seucheta M, R. Raman and E. Das, “Deep learning architecture based on segmented fundus image features for classification of diabetic retinopathy,” Biomedical Signal Processing and Control, vol. 68, 102600, 2021.
- [19] A. Foo, W. Hsu, M. Lee, G. Lim and T. Wong, “Multi-task learning for diabetic retinopathy grading and lesion segmentation”, Proceedings of the AAAI Conference on Artificial Intelligence, 2020.
- [20] O. Daanouni, B. Cherradi and Amal Tmiri, “Self-attention mechanism for diabetic retinopathy detection,” Advances in Science, Technology and Innovation, pp. 79-88, 2021.
- [21] Y. Li, Z. Song, S. Kang, S. Jung and W. Kang, “Semi-supervised auto-encoder graph network for diabetic retinopathy grading,” IEEE Access, pp. 140759-140767, 2021.
- [22] B. Bansode, Bakwad K. M., A. Dildar and Sable G.S., “Deep CNN-based feature extraction with optimized LSTM for enhanced diabetic retinopathy detection,” 2022.
- [23] J. Gu, X. Sun, Y. Zhang, K. Fu and L. Wang, “Deep residual squeeze and excitation network for remote sensing image super-resolution”, Remote Sensing, vol. 11, 2019.

- [24] L. Qiao, Y. Zhu and H. Zhou, "Diabetic retinopathy detection using prognosis of microaneurysm and early diagnosis system for non-proliferative diabetic retinopathy based on deep learning algorithms," *IEEE Access*, 2020.
- [25] A. Skouta, A. Elmoufidi, S. Jai-Andaloussi and O. Ouchetto, "Hemorrhage semantic segmentation in fundus images for the diagnosis of diabetic retinopathy by using a convolutional neural network," *Journal of Big Data*, 9(78), 2022.
- [26] G. Suardika, M. Maysanjaya and M. Kesiman, "Optic disc segmentation based on mask R-CNN in retinal fundus images," *4<sup>th</sup> International Conference on Biomedical Engineering (IBIOMED)*, 2022.
- [27] T. Kauppi, V. Kalesnykiene, J. Kamarainen, L. Lensu, I. Sorri, A. Raninen, R. Voutilainen, H. Uusitalo, H. Kalviainen and J. Pietla, "DIARETDB1 diabetic retinopathy database and evaluation protocol," *Technical report*, 2021.
- [28] S. Qummar, F. Khan, S. Shah, A. Khan, S. Shamshirband, Z. Rehman, I. Khan and W. Jadoon, "A deep learning ensemble approach for diabetic retinopathy detection," *IEEE Access*, pp. 150530-150539, 2019.
- [29] K. Adal, P. Van Etten, J. Martinez, K. Rouwen, K. Vermeer and L. van Vliet, "An automated system for the detection and classification of retinal changes due to red lesions in longitudinal fundus images," *IEEE Transactions of Biomedical Engineering*, 65(6), pp. 1382-1390, 2017.
- [30] L. Dai, R. Fang, H. Li, X. Hou, B. Sheng, Q. Wu and W. Jia, "Clinical report guided retinal microaneurysms detection with multi-sieving deep learning, *IEEE Transaction of Medical Imaging*, 37(5), pp. 1149-1161, 2018.
- [31] T. Shanti and R. Sabeanian, "Modified Alexnet architecture for classification of diabetic retinopathy images," *Computers & Electrical Engineering*, vol. 76, pp. 56-64, 2019.
- [32] R. Maaliw, A. Alon, A. Lagman, M. Garcia, J. Susa, R. Reyes, M. Fernando-Raguro and A. Hernandez, "A Multistage transfer learning approach for acute lymphoblastic leukemia classification," *13<sup>th</sup> IEEE 13th Annual Ubiquitous Computing, Electronics & Mobile Communication Conference (UEMCON)*, New York, USA, 2022.
- [33] J. Wang, Peiqing LV, H. Wang and C. Shi, "SAR-U-Net: Squeeze-and-excitation block and atrous spatial pyramid pooling based residual U-Net for automatic liver segmentation in computed tomography," *Computer Methods and Programs in Biomedicine*, 106268, 2021.
- [34] X. Zhang, L. Li, D. Di, J. Wang, G. Chen, W. Jing and M. Emam, "SERNet: Squeeze and excitation residual network for semantic segmentation of high-resolution remote sensing images," *MDPI Remote Sensing*, vol. 14, pp. 1-19, 2022.
- [35] R. Maaliw, A. Alon, A. Lagman, M. Garcia, M. Abante, R. Belleza, J. Tan and R. Maaño, "Cataract detection and grading using ensemble neural networks and transfer learning," *IEEE 13th Annual Information Technology, Electronics and Mobile Communication Conference (IEMCON)*, Vancouver, Canada, 2022.
- [36] B. Al-Bander, B. Williams, W. Al-Nuaimy, M. Al-Taee, H. Pratt and Y. Zheng, "Dense fully convolutional segmentation of the optic disc and cup in colour fundus for glaucoma diagnosis," *Symmetry*, 2018.
- [37] V. Badrinarayanan, A. Kendall and R. Cipolla, "SegNet: A deep convolutional encoder-decoder architecture for image segmentation," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 39(12), pp. 2481-2495, 2017.
- [38] R. Maaliw, J. Susa, A. Alon, A. Lagman, S. Ambat, M. Garcia, K. Piad and M. Fernando-Raguro, "A deep learning approach for automatic scoliosis cobb angle identification," *IEEE World Artificial Intelligence & Internet of Things Congress (AIoT)*, Seattle, Washington, USA, 2022.
- [39] K. Cha, L. Hadjiiski, R. Samala, H. Chan, R. Cohan, E. Caoili, C. Paramagul, A. Alva and A. Weizer, "Bladder cancer segmentation in CT for treatment response assessment: Application of deep-learning convolution neural networks – A pilot study," *MDPI Tomography*, 2(4), pp. 421-429, 2016.
- [40] P. Coupe, B. Mansencal, M. Clement, R. Giraud, B. D. de Senneville, V. Ta, V. Lepetit and J. Manjon, "AssemblyNet: A large ensemble of CNNs for 3D whole brain MRI segmentation," *NeuroImage*, 219, 117026, 2020.
- [41] M. Goyal, A. Oakley, P. Bansal, D. Dancey and M. Yap, "Skin lesion segmentation in dermoscopic images with ensemble deep learning methods," *IEEE Access*, vol. 8, pp. 4171-4181, 2020.
- [42] S. Guo, K. Wang, H. Kang, Y. Zhang, Y. Gao and T. Li, "BTS-DSN: Deeply supervised neural network with short connections for retinal vessel segmentation," *International Journal of Medical Informatics*, vol. 126, pp. 105-113, 2019.
- [43] T. Hofmanninger, F. Prayer, J. Pan, S. Röhrlach, H. Prosch and G. Langs, "Automatic lung segmentation in routine imaging is primarily a data diversity problem, not a methodology problem," *European Radiology Experimental*, 4(1), pp. 1-13, 2020.
- [44] Q. Jin, Z. Meng, T. Pham, Q. Chen, L. Wei and R. Su, "DUNet: A deformable network for retinal vessel segmentation," *Knowledge-Based Systems*, vol. 178, pp. 149-162, 2019.
- [45] F. Yuan, Z. Zhang and Z. Fang, "An effective CNN and transformer complementary network for medical image segmentation," *Pattern Recognition*, vol. 136, 109228, 2023.

# Certification of Author Contribution

We hereby certify that the following statement outlines the contributions made by each author to the creation of this work. This certification serves to acknowledge and authenticate the individual contributions, ensuring transparency and proper recognition of each author's involvement in the research/project.

**Article Title:** "An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection"

**Publisher:** Institute of Electrical and Electronics Engineers (IEEE)

**Published In:** IEEE Xplore



**Date of Publication:** April 18, 2023

**Publication Link:** <https://ieeexplore.ieee.org/document/10099069>

**DOI:** <https://doi.org/10.1109/CCWC57344.2023.10099069>

**Scopus-Indexed (SCI):** Yes

**Web of Science Indexed (WOS):** YES (Inspect Accession Number: 22961896)

CRediT (Contributor Roles Taxonomy) *			
Author Name	Role/s	Percentage Contribution	Signature
Renato R. Maaliw III (Lead Author)	Conceptualization, Methodology, Software, Validation, Data Curation, Writing – Original Draft, Visualization, Supervision	40%	
Zoren P. Mabunga	Methodology, Formal Analysis, Investigation, Writing – Original Draft	15%	
Maria Rossana D. De Veluz	Formal Analysis, Writing- Review & Editing, Resources	10%	
Alvin S. Alon	Methodology, Formal Analysis, Investigation,	10%	
Ace C. Lagman	Writing- Review & Editing	5%	
Manuel B. Garcia	Writing- Review & Editing,	5%	
Luisito L. Lacatan	Writing- Review & Editing	5%	
Rhowel M. Dellosa	Writing- Review & Editing	5%	
<b>TOTAL</b>		<b>100.00%</b>	

Attested by:

  
**Renato R. Maaliw III, DIT**  
Associate Professor II/Lead Author  
Southern Luzon State University

Certified by:

  
**Renato R. Maaliw III, DIT**  
Dean, College of Engineering  
Southern Luzon State University



Scopus Preview

# SCOPUS-INDEXED

[Author Search](#)[Sources](#)

## Author Feedback Wizard

[← Back to author profile](#)

Review profile details for

[About the Author Feedback Wizard](#) ⓘ

Maaliw, Renato R.

### Author details

Documents

Preprints

Awarded grants

### Author details

Preferred Name  
Maaliw, Renato R.Current affiliation  
Southern Luzon State University

37 Documents

Review and remove any documents that do not belong to this profile

Sort by [Year \(newest\)](#)

Document title	Authors	Source	Year
Policy conflict detection approach for decision-making in intelligent industrial Internet of Things	Maaliw III, R.R., Tripathy, P.K., Shabaz, M., ...Zaidi, A., Sharma, D.P.	Computers and Electrical Engineering	2023
<a href="#">X Remove from profile</a>		108	
Scenario-Based Multi-Objective Location-Routing Model for Pre-Disaster Planning: A Philippine Case Study	Maaliw, R.R., de Veluz, M.R.D., Redi, A.A.N.P., ...Prasetyo, Y.T., Young, M.N.	Sustainability (Switzerland)	2023
<a href="#">X Remove from profile</a>		15(6)	
Sensing functions of an iron-doped boron nitride nanocone towards acetaminophen and its thio/thiol analogs: A DFT outlook	Saadh, M.J., Amin, A.H., Farhadiyan, S., ...Mirzaei, M., Akhavan-Sigari, R.	Diamond and Related Materials	2023
<a href="#">X Remove from profile</a>		133	
Spatio-temporal attention based real-time environmental monitoring systems for landslide monitoring and prediction	Maaliw, R.R., Babu, M.V.S., Ashokkumar, N., ...Joshi, A., Keshta, I.	Spatial Information Research	2023
<a href="#">X Remove from profile</a>			
Intelligent Four-Way Crossroad Safety Management For Autonomous, Non-Autonomous and VIP Vehicles	Maaliw, R.R., Naem, A.B., Soomro, A.M., ...Bhuva, A., Abdel-Rehim, W.M.F.	Proceedings - 2023 IEEE International Conference on Emerging Trends in Engineering, Sciences and Technology, ICES and T 2023	2023
<a href="#">X Remove from profile</a>			
Constructor Development: Predicting Object Communication Errors	Maaliw, R.R., Soomro, A.M., Naem, A.B., ...Senapati, B., Sakr, H.A.	Proceedings - 2023 IEEE International Conference on Emerging Trends in Engineering, Sciences and Technology, ICES and T 2023	2023
<a href="#">X Remove from profile</a>			
An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection	Maaliw, R.R., Mabunga, Z.P., De Veluz, M.R.D., ...Lacatan, L.L., Dellosa, R.M.	2023 IEEE 13th Annual Computing and Communication Workshop and Conference, CCWC 2023 pp. 168-175	2023
<a href="#">X Remove from profile</a>			

Energy efficient indoor localisation for narrowband internet of things	Keshta, I., Soni, M., Bhatt, M.W., ...Soomar, A.M., Shabaz, M.	CAAI Transactions on Intelligence Technology	2023
<a href="#">X Remove from profile</a>			
Golden Apple Snail Kuhol Eggs Detection Using MATLAB Image Processing	Maaliw, R.R., Carreon, B.I.A., Dequito, C.Y., ...Esmerna, C.J.M., Ballado, A.H.	2022 IEEE 14th International Conference on Humanoid, Nanotechnology, Information Technology, Communication and Control, Environment, and Management, HNICEM 2022	2022

---

<a href="#">X Remove from profile</a>			
I-Respond: Mobile Application for Emergency Response Using Dijkstra's Algorithm Shortest Path	Maaliw, R.R., Lagman, A.C., De Angel, R., ...Ramos, R.F., Perez, M.R.L.	2022 IEEE 14th International Conference on Humanoid, Nanotechnology, Information Technology, Communication and Control, Environment, and Management, HNICEM 2022	2022

< Previous 1 2 3 4 Next >

Display [10 results](#) 

 Are any documents missing? <a href="#">Search for missing documents on Scopus</a>
2 Preprints 
0 Awarded grants 

## About Scopus

- [What is Scopus](#)
- [Content coverage](#)
- [Scopus blog](#)
- [Scopus API](#)
- [Privacy matters](#)

## Language

- [日本語版を表示する](#)
- [查看简体中文版本](#)
- [查看繁體中文版本](#)
- [Просмотр версии на русском языке](#)

## Customer Service

- [Help](#)
- [Tutorials](#)
- [Contact us](#)

**ELSEVIER**

[Terms and conditions](#)  [Privacy policy](#) 

Copyright © Elsevier B.V. All rights reserved. Scopus® is a registered trademark of Elsevier B.V.

We use cookies to help provide and enhance our service and tailor content. By continuing, you agree to the [use of cookies](#) .

 RELX

All



ADVANCED SEARCH

Conferences &gt; 2023 IEEE 13th Annual Computi... ?

# An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection

Publisher: IEEE

Cite This

PDF

Renato R. Maaliw ; Zoren P. Mabunga ; Maria Rossana D. De Veluz ; Alvin S. Alon ; Ace C. Lagman ; Ma... All Authors

68

Full

Text Views



&lt; Previous | Back to Results | Next &gt;

**Need  
Full-Text**

access to IEEE Xplore  
for your organization?

REQUEST A FREE TRIAL &gt;

## More Like This

Fundus Disease Image

Classification based on Improved Transformer

2021 International Conference on Neuromorphic Computing (ICNC)  
Published: 2021

An Efficient and Light Weight Deep Learning Model for Accurate Retinal Vessels Segmentation

IEEE Access  
Published: 2023

Show More

## Abstract

### Document Sections

I. Introduction

II. Methodology

III. Results

IV. Discussions

V. Conclusions and Future Works

Show Full Outline ▾

## Authors

## Figures

## References

## Keywords

## Metrics

## Abstract:

Diabetic retinopathy is a serious complication needing prompt diagnosis and medication to avert vision loss. Lesions caused by the condition are difficult to track because they are hidden behind the eye's structure in small and subtle forms. To extract relevant features., we created a robust pipeline using multiple preprocessing techniques., image segmentation architecture (DR-UNet) with atrous spatial pyramid pooling., and an attention-aware deep learning convolutional network with different modules based on ResidualNet. Empirical results show that our framework has segmentation accuracies of 87.10% (intersection over union) and 84.50% (dice similarity coefficient). Moreover., classification performance of 99.20% provided better results than existing schemes., as reinforced by the smooth convergence of training/validation loss and accuracy. This study has the potential to supplement traditional diagnosis to identify better the ailment in its early and advanced stages.

**Published in:** 2023 IEEE 13th Annual Computing and Communication Workshop and Conference (CCWC)

**Date of Conference:** 08-11 March 2023

**INSPEC Accession Number:** 22961896

**Date Added to IEEE Xplore:** 18 April 2023

**DOI:** 10.1109/CCWC57344.2023.10099069

**ISBN Information:**

**Publisher:** IEEE

**Conference Location:** Las Vegas, NV, USA

### I. Introduction

Excessive sugar levels in the blood cause severe harm to body organs resulting in life-threatening illnesses if left unchecked. Diabetic retinopathy (DR) is a medical disorder affecting people with diabetes. It can be either mild (DR-NP, non-proliferative) or severe (DR-P, proliferative). At first, a person with DR-NP experiences blurred vision. However, as the condition progresses, new blood vessels (BV) emerge in the retina, further debilitating visual acuity. The complications from these leaks and bleeding trigger DR. At its worst, the disease causes complete obstruction of the BV, manifesting as various lesions. The most noticeable lesions are microaneurysms, the earliest indications of DR, and appear as little scattered dots with a round shape on fundus images [1]. Fig 1(b). At present, an ophthalmologist manually evaluates these lesions and determines their severity. An automated prognosis system can replace the technique to determine conditions rapidly and reliably. Both supervised and unsupervised approaches have been explored in the pursuit of highly accurate outcomes. Deep learning (DL) techniques are applied at the pixel level to recognize and segment retinal pictures. Convolutional neural networks (CNN) are used in deep learning. They are made up of interconnected 'neurons' of multiple layers and have widespread utilization in

[Sign in to Continue Reading](#)

**IEEE Authors:**  
**Increase Your Research Impact**

Add executable code to your research articles

UPLOAD YOUR CODE

  
CODE OCEAN



[ABOUT](#)

**Renato R. Maaliw**  
College of Engineering Southern Luzon State University, Lucban, Quezon, Philippines

**Zoren P. Mabunga**  
College of Engineering Southern Luzon State University, Lucban, Quezon, Philippines

**Maria Rossana D. De Veluz**  
College of Engineering Southern Luzon State University, Lucban, Quezon, Philippines

**Alvin S. Alon**  
Digital Transformation Center Batangas State University, Batangas City, Philippines

**Ace C. Lagman**  
Information Technology Dept., FEU Institute of Technology, Manila, Philippines

**Manuel B. Garcia**  
Information Technology Dept., FEU Institute of Technology, Manila, Philippines

**Luisito Lolong Lacatan**  
College of Computing & Engineering Pamantasan ng Cabuyao, Cabuyao, Laguna,  
Philippines

**Rhowel M. Dellosa**  
Research and Development Office University of Northern Philippines, Vigan City, Philippines

Figures



References



Keywords



Metrics



#### IEEE Personal Account

[CHANGE USERNAME/PASSWORD](#)

#### Purchase Details

[PAYMENT OPTIONS](#)

[VIEW PURCHASED DOCUMENTS](#)

#### Profile Information

[COMMUNICATIONS PREFERENCES](#)

[PROFESSION AND EDUCATION](#)

[TECHNICAL INTERESTS](#)

#### Need Help?

US & CANADA: +1 800 678 4333

WORLDWIDE: +1 732 981 0060

[CONTACT & SUPPORT](#)

#### Follow



[About IEEE Xplore](#) | [Contact Us](#) | [Help](#) | [Accessibility](#) | [Terms of Use](#) | [Nondiscrimination Policy](#) | [IEEE Ethics Reporting](#) | [Sitemap](#) | [IEEE Privacy Policy](#)  
A not-for-profit organization, IEEE is the world's largest technical professional organization dedicated to advancing technology for the benefit of humanity.

© Copyright 2023 IEEE - All rights reserved.

[Feedback](#)

# IEEE COPYRIGHT AND CONSENT FORM

To ensure uniformity of treatment among all contributors, other forms may not be substituted for this form, nor may any wording of the form be changed. This form is intended for original material submitted to the IEEE and must accompany any such material in order to be published by the IEEE. Please read the form carefully and keep a copy for your files.

## An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection

Dr. Renato R. Maaliw III, Mr. Zoren P Mabunga, Prof. Maria Rossana D. De Veluz, Dr. Alvin Sarraga Alon, Dr. Ace Lagman, Dr. Manuel B. Garcia, Dr. Luisito L. Lacatan and Dr. Rhowel M Dellosa

2023 IEEE 13th Annual Computing and Communication Workshop and Conference (CCWC)

## COPYRIGHT TRANSFER

The undersigned hereby assigns to The Institute of Electrical and Electronics Engineers, Incorporated (the "IEEE") all rights under copyright that may exist in and to: (a) the Work, including any revised or expanded derivative works submitted to the IEEE by the undersigned based on the Work; and (b) any associated written or multimedia components or other enhancements accompanying the Work.

## GENERAL TERMS

1. The undersigned represents that he/she has the power and authority to make and execute this form.
2. The undersigned agrees to indemnify and hold harmless the IEEE from any damage or expense that may arise in the event of a breach of any of the warranties set forth above.
3. The undersigned agrees that publication with IEEE is subject to the policies and procedures of the [IEEE PSPB Operations Manual](#).
4. In the event the above work is not accepted and published by the IEEE or is withdrawn by the author(s) before acceptance by the IEEE, the foregoing copyright transfer shall be null and void. In this case, IEEE will retain a copy of the manuscript for internal administrative/record-keeping purposes.
5. For jointly authored Works, all joint authors should sign, or one of the authors should sign as authorized agent for the others.
6. The author hereby warrants that the Work and Presentation (collectively, the "Materials") are original and that he/she is the author of the Materials. To the extent the Materials incorporate text passages, figures, data or other material from the works of others, the author has obtained any necessary permissions. Where necessary, the author has obtained all third party permissions and consents to grant the license above and has provided copies of such permissions and consents to IEEE

You have indicated that you DO wish to have video/audio recordings made of your conference presentation under terms and conditions set forth in "Consent and Release."

## CONSENT AND RELEASE

1. In the event the author makes a presentation based upon the Work at a conference hosted or sponsored in whole or in part by the IEEE, the author, in consideration for his/her participation in the conference, hereby grants the IEEE the unlimited, worldwide, irrevocable permission to use, distribute, publish, license, exhibit, record, digitize, broadcast, reproduce and archive, in any format or medium, whether now known or hereafter developed: (a) his/her presentation and comments at the conference; (b) any written materials or multimedia files used in connection with his/her presentation; and (c) any recorded interviews of him/her (collectively, the "Presentation"). The permission granted includes the transcription and reproduction of the Presentation for inclusion in products sold or distributed by IEEE and live or recorded broadcast of the Presentation during or after the conference.
2. In connection with the permission granted in Section 1, the author hereby grants IEEE the unlimited, worldwide, irrevocable right to use his/her name, picture, likeness, voice and biographical information as part of the advertisement, distribution and sale of products incorporating the Work or Presentation, and releases IEEE from any claim based on right of privacy or publicity.

BY TYPING IN YOUR FULL NAME BELOW AND CLICKING THE SUBMIT BUTTON, YOU CERTIFY THAT SUCH ACTION CONSTITUTES YOUR ELECTRONIC SIGNATURE TO THIS FORM IN ACCORDANCE WITH UNITED STATES LAW, WHICH AUTHORIZES ELECTRONIC SIGNATURE BY AUTHENTICATED REQUEST FROM A USER OVER THE INTERNET AS A VALID SUBSTITUTE FOR A WRITTEN SIGNATURE.

  
Renato R. Maaliw III  
Signature

20-01-2023

Date (dd-mm-yyyy)

## Information for Authors

### AUTHOR RESPONSIBILITIES

The IEEE distributes its technical publications throughout the world and wants to ensure that the material submitted to its publications is properly available to the readership of those publications. Authors must ensure that their Work meets the requirements as stated in section 8.2.1 of the IEEE PSPB Operations Manual, including provisions covering originality, authorship, author responsibilities and author misconduct. More information on IEEE's publishing policies may be found at [http://www.ieee.org/publications\\_standards/publications/rights/authorrightsresponsibilities.html](http://www.ieee.org/publications_standards/publications/rights/authorrightsresponsibilities.html) Authors are advised especially of IEEE PSPB Operations Manual section 8.2.1.B12: "It is the responsibility of the authors, not the IEEE, to determine whether disclosure of their material requires the prior consent of other parties and, if so, to obtain it." Authors are also advised of IEEE PSPB Operations Manual section 8.1.1B: "Statements and opinions given in work published by the IEEE are the expression of the authors."

### RETAINED RIGHTS/TERMS AND CONDITIONS

- Authors/employers retain all proprietary rights in any process, procedure, or article of manufacture described in the Work.
- Authors/employers may reproduce or authorize others to reproduce the Work, material extracted verbatim from the Work, or derivative works for the author's personal use or for company use, provided that the source and the IEEE copyright notice are indicated, the copies are not used in any way that implies IEEE endorsement of a product or service of any employer, and the copies themselves are not offered for sale.
- Although authors are permitted to re-use all or portions of the Work in other works, this does not include granting third-party requests for reprinting, republishing, or other types of re-use. The IEEE Intellectual Property Rights office must handle all such third-party requests.
- Authors whose work was performed under a grant from a government funding agency are free to fulfill any deposit mandates from that funding agency.

### AUTHOR ONLINE USE

- **Personal Servers.** Authors and/or their employers shall have the right to post the accepted version of IEEE-copyrighted articles on their own personal servers or the servers of their institutions or employers without permission from IEEE, provided that the posted version includes a prominently displayed IEEE copyright notice and, when published, a full citation to the original IEEE publication, including a link to the article abstract in IEEE Xplore. Authors shall not post the final, published versions of their papers.
- **Classroom or Internal Training Use.** An author is expressly permitted to post any portion of the accepted version of his/her own IEEE-copyrighted articles on the author's personal web site or the servers of the author's institution or company in connection with the author's teaching, training, or work responsibilities, provided that the appropriate copyright, credit, and reuse notices appear prominently with the posted material. Examples of permitted uses are lecture materials, course packs, e-reserves, conference presentations, or in-house training courses.
- **Electronic Preprints.** Before submitting an article to an IEEE publication, authors frequently post their manuscripts to their own web site, their employer's site, or to another server that invites constructive comment from colleagues. Upon submission of an article to IEEE, an author is required to transfer copyright in the article to IEEE, and the author must update any previously posted version of the article with a prominently displayed IEEE copyright notice. Upon publication of an article by the IEEE, the author must replace any previously posted electronic versions of the article with either (1) the full citation to the IEEE work with a Digital Object Identifier (DOI) or link to the article abstract in IEEE Xplore, or (2) the accepted version only (not the IEEE-published version), including the IEEE copyright notice and full citation, with a link to

the final, published article in IEEE Xplore.

Questions about the submission of the form or manuscript must be sent to the publication's editor.

Please direct all questions about IEEE copyright policy to:

IEEE Intellectual Property Rights Office, [copyrights@ieee.org](mailto:copyrights@ieee.org), +1-732-562-3966





# Evidence of Peer-Review



Conference »Register »

#58 (1570876810): An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection

## #58 (1570876810): An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection

BuBTeX

Property	Change	Value
	Add	

Conference and track	2023 IEEE 13th Annual Computing and Communication Workshop and Conference (CCWC) - CCWC Paper - Regular Research Paper						
----------------------	--	--	--	--	--	--	--

Authors	Affiliation (edit for paper)							Country	Register
	Name	ID	Edit	Flag	Email				
◀◀	Renato R. Maaliw III	1841045			Southern Luzon State University, Philippines	renatomaaliw3@gmail.com	Philippines		
	Zoren P Mabunga	1862331	not creator		Southern Luzon State University & Mapua University, Philippines	zorenmabunga@gmail.com	Philippines		
	Maria Rossana D. De Veluz	1950583	not creator		Southern Luzon State University, Philippines	marirossanadeveluz@gmail.com	Philippines		
	Alvin Sarraga Alon	1770837	not creator		Batangas State University, Philippines	alvin.alon@g.batstate-u.edu.ph	Philippines		
	Ace Lagman	1575119	not creator		FEU Institute of Technology, Philippines	aclagman@feutech.edu.ph	Philippines		
	Manuel B. Garcia	1696191	not creator		FEU Institute of Technology, Philippines	mbgarcia@feutech.edu.ph	Philippines		
	Luisito L. Lacatan	1713303	not creator		Pamantasan Ng Cabuyao, Philippines	louie1428@gmail.com	Philippines		

Rhowel  
M  
Dellosa 1617088 not creator University of Northern Philippines, Philippines rhoweldellosa2002@gmail.com Philippines



Title	Only the chairs can edit	An Enhanced Segmentation and Deep Learning Architecture for Early Diabetic Retinopathy Detection
Abstract	Only the chairs can edit	Diabetic retinopathy is a serious complication needing prompt diagnosis and medication to avert vision loss. Lesions caused by the condition are difficult to track because they are hidden behind the eye's structure in small and subtle forms. To extract relevant features, we created a robust pipeline using multiple preprocessing techniques, image segmentation architecture (DR-UNet) with atrous spatial pyramid pooling, and an attention-aware deep learning convolutional network with different modules based on ResidualNet. Empirical results show that our framework has segmentation accuracies of 87.10% (intersection over union) and 84.50% (dice similarity coefficient). Moreover, classification performance of 99.20% provided better results than existing schemes, as reinforced by the smooth convergence of training/validation loss and accuracy. This study has the potential to supplement traditional diagnosis to identify better the ailment in its early and advanced stages.
Keywords	Only the chairs can edit	attention-aware DCNN; atrous spatial pyramid pooling; blindness; fundus images; lesion detection; ophthalmology
Topics	Only the chairs can edit	Artificial Intelligence and Machine Learning; Pattern Recognition and Analysis
Presenter(s)	<a href="#">+</a>	Renato R. Maaliw III (bio)
Registration		Renato R. Maaliw III has registered (but not paid) for T2:IEEEM
DOI	Only the chairs can edit	
Status		Accepted

Copyright form [+](#) IEEE; IEEE: Jan 20, 2023 08:00 Asia/Hong\_Kong

[Review manuscript](#) [Final manuscript](#) [Presentation](#)



## Personal notes



You are a reviewer for this conference. You are the creator and an author for this paper. You have authored an accepted paper in this conference.

## Reviews

### 3 IEEE CCWC 2023s

#### Review 1

None of the scores are visible for your roles.

#### Comments for reviewers (write at least 100 words regarding this review)

In this paper, the authors created a robust pipeline using multiple preprocessing techniques and an attention-aware deep-learning convolutional network with different modules based on ResidualNet. The flow chart helps the reader understand the principle very well. The paper is well-organized and numerical result is reasonable.

#### Review 2

None of the scores are visible for your roles.

**Comments for reviewers (write at least 100 words regarding this review)**

The importance of research is well established by how it can be an alternative to traditional diagnosis technique. The paper clearly explains the methodology involved in data collection, preprocessing and feature-engineering. The analysis of data and the results look promising in identifying the ailment in its early and advanced stages.

**Review 3**

None of the scores are visible for your roles.

**Comments for reviewers (write at least 100 words regarding this review)**

Thanks for giving me an opportunity to review it. This study introduced an enhanced segmentation technique and attention-aware DCNN for identifying Diabetic retinopathy.

My suggestions are:

- 1-It should to add the link of the database.
- 2-Literature gaps of the discussed papers should be given.
- 3- What are your novelties and contributions? Please highlight them