

FIG-004. Endpoint, reserve, bounded-coupling, and routing

Stage 10.14 readable review render from the Stage 10.5 panel-evidence crosswalk

A

Endpoint input schema and contrast contract

Purpose

Define how endpoint perturbation rows carry grouping, contrast, margin, and readout fields.



Reader readout

Endpoint use cases enter RhoDyn through declared contrasts rather than being forced into trajectory language.


Stage 7.4/10.5 main method extension

B

Bounded-coupling decisions under declared margins

Purpose

Show margin-bound ERK/Akt coupling calls with pass, fail, or inconclusive decisions.



Reader readout

Bounded coupling is a context-scoped interval decision, not a claim of no biochemical interaction.

Stage 7.4/10.5 main method extension

C

Reserve-like endpoint coordinate

Purpose

Tie buffering language to measured endpoint preservation rather than hidden latent reserve.



Reader readout

Reserve-like calls remain measurement-scoped and uncertainty-aware.

Stage 7.4/10.5 main method extension

D

Routed-output reduced-architecture comparison

Purpose

Compare candidate endpoint architectures against reduced alternatives.



Reader readout

Routed-output support is earned only when reduced alternatives fail within the measured endpoint structure.


Stage 7.4/10.5 main method extension

E

Measurement-scope limits

Purpose

State where endpoint, reserve-like, and routed-output decisions should abstain.

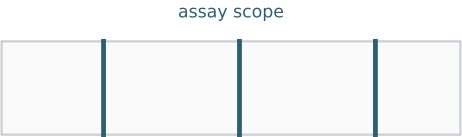

Reader readout

The method extension is broad enough for endpoint data but still bounded by assay scope and declared alternatives.

Stage 7.4/10.5 main method extension