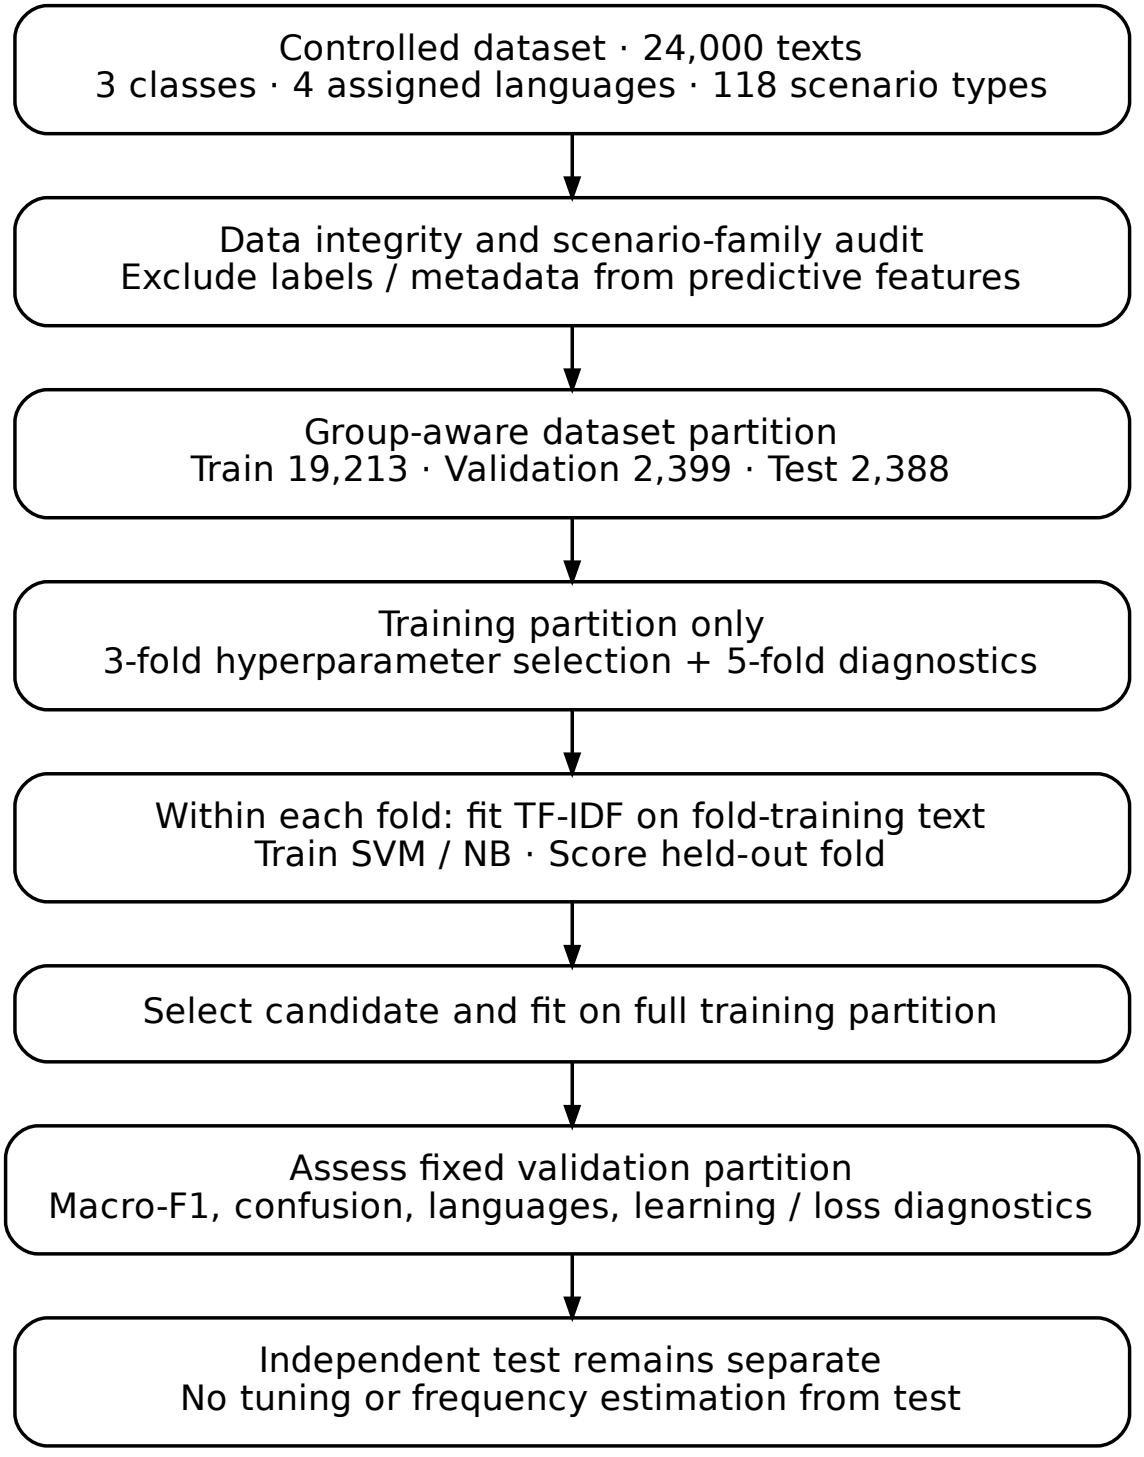
Controlled dataset · 24,000 texts
3 classes · 4 assigned languages · 118 scenario types
Data integrity and scenario-family audit
Exclude labels / metadata from predictive features
Group-aware dataset partition
Train 19,213 · Validation 2,399 · Test 2,388
Training partition only
3-fold hyperparameter selection + 5-fold diagnostics
Within each fold: fit TF-IDF on fold-training text
Train SVM / NB · Score held-out fold
Select candidate and fit on full training partition
Assess fixed validation partition
Macro-F1, confusion, languages, learning / loss diagnostics
Independent test remains separate
No tuning or frequency estimation from test