



The journey has just begun

RACR - MQUAT

René Schöne

Dresden, June 23, 2015

Agenda

1 The past

2 The present


3 The future

Where we started in Phase I

- MQuAT concept [GKP⁺14]
 - Self-adaptive system optimizing for multiple qualities
 - Component-based design for both hardware and software
 - Quality contracts capturing requirements and guarantees of components
- THEATRE [GWC⁺10] as a Java-based implementation of MQuAT
 - Knowledge represented using EMF-(Meta)Models
 - Optimization problem solved by transformation to ILP
 - Designed for distributed operation (see HAECubie) using Master-Slave-Pattern [Sah96]


The optimization problem

Mapping n components on m resources

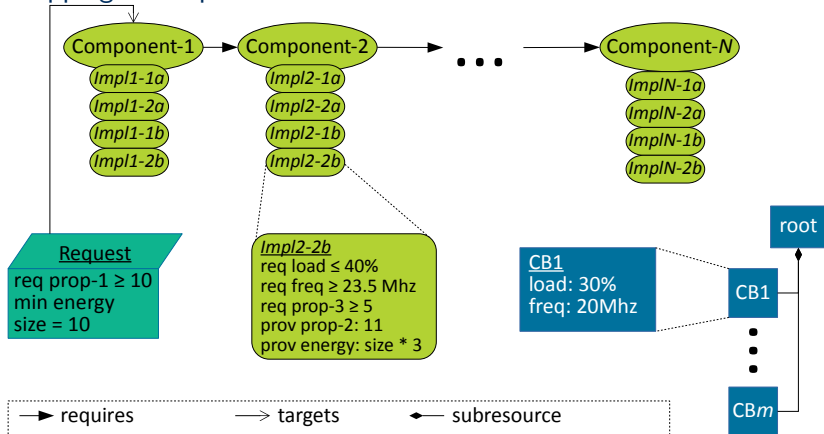

The optimization problem solved

Mapping n components on m resources

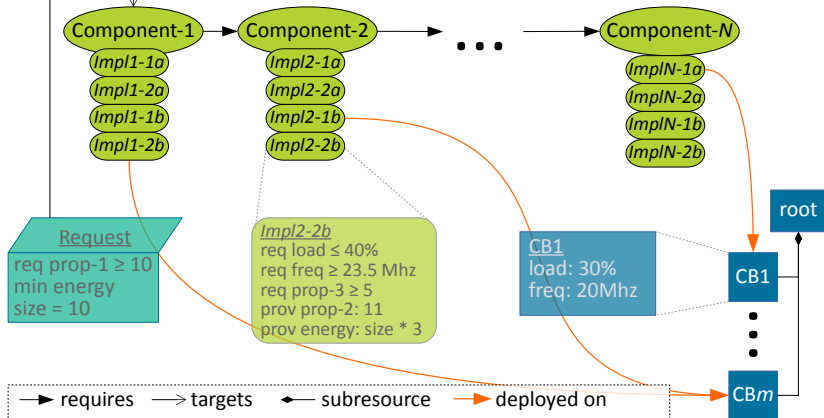

What was the problem

- Usage of ILP thought *unusable* for bigger systems
 - Current measurements disprove this, see slides 11 – 13
- EMF-Model (element)s somewhat ambiguous or superfluous
 - Component requirement possible on both, component- and mode-level
 - Structure and variant model contain similar information
 - General approach of structural model not easy to use (especially for ILP-Generation)
- Currently, ILP still generated from scratch for each request

Agenda

1 The past

2 The present

3 The future


How we want to achieve scalability

- Use RACR [Bür12]
 - **R**eference **A**tttribute Grammer **C**ontrolled **R**ewriting
 - Specify knowledge as an ASG¹ whose structure is defined by a RAG²
 - RAG is a combination of structural and variant model, avoiding duplicate information
 - Analyses run on ASG now run inherently **incremental** and are defined **declarative**

¹Abstract Syntax Graph, i.e. an Abstract Syntax Tree with references

²Reference Attribute Grammar

Test setup

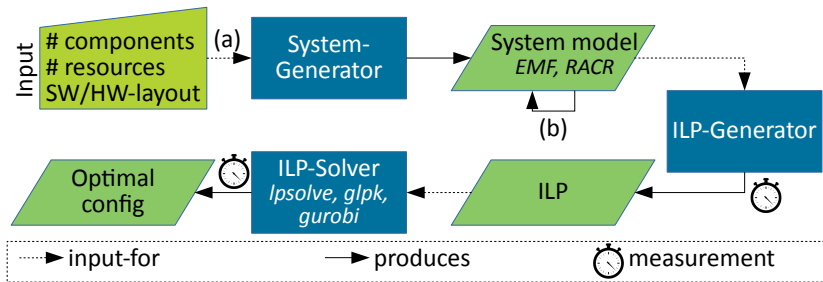

(a) Initial creation, (b) HW changes


Measurements

- Setup
 - System Generator to generate ILP for increasing size of systems
 - 23 different sizes of systems
 - ILP-Solving with 40sec timeout
 - Two new aspects
 - technology used: Java vs. RACR
 - ILP format: old vs. enhanced
- ILP-Solving using existing Java-based ILP format
 - Timeouts: glpk 10/23, lpsolve 8/23
- ILP-Solving using RACR-based enhanced ILP format
 - All but one systems solved within 5sec (outlier 12sec)

Measurement on generation times

- Not quite there yet:


ILP Generation Time

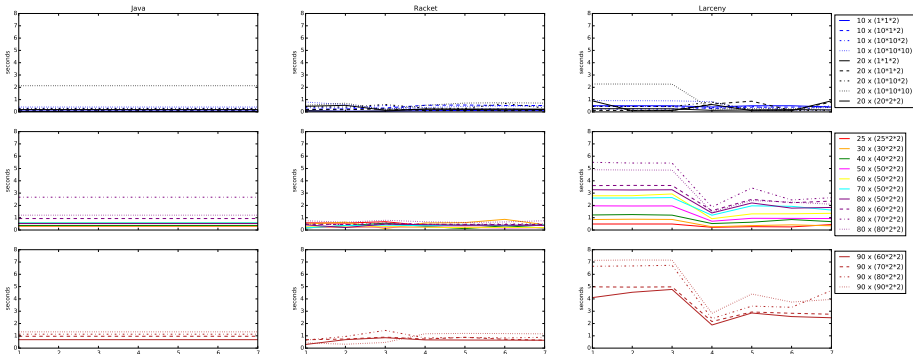


Measurement on solving times (2)

- Promising results

ILP Solving Time

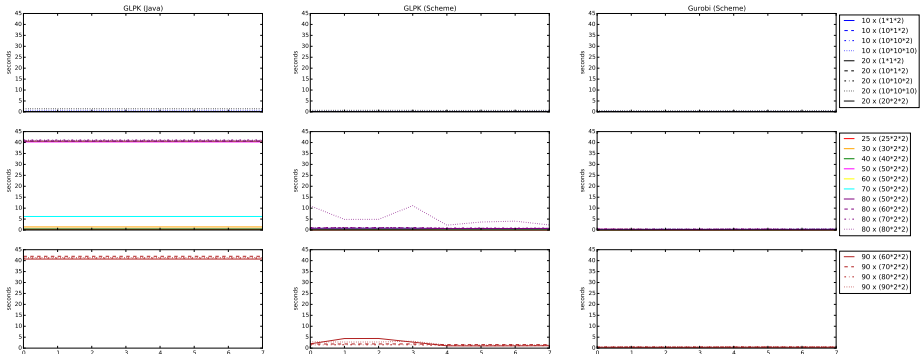

Measurement on solving times (3)

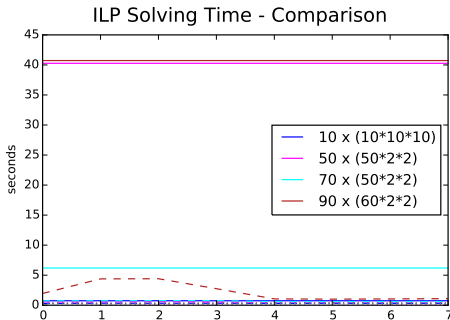

- solid = GLPK, old format, dashed = GLPK, enhanced format
- dotted = Gurobi, enhanced format (≤ 1 sec)

Current pitfalls

- Different input formats accepted by lp_solve and glpk
 - Transformation (mostly syntactical) needed
 - Still, different solution computed (GLPK occasionally ignore binary variables, value e.g. 0.348485)
- Slow running Larceny
 - Unexpected as Larceny compiles to machine code
- Caching not fully exploited
 - Some constraints still unnecessarily recomputed

General Facts

- <https://bitbucket.org/rschoene/racr-mquat>
- Main language: Scheme
 - Implementations used: Racket³, Larceny⁴

Language	files	blank	comment	code
Scheme	14	203	300	2207
Python	7	75	43	477
SUM:	21	278	343	2684

³<http://racket-lang.org/>

⁴<http://www.larcenists.org/>

Agenda

1 The past

2 The present

3 The future

Where we should go next

- Do not transform to ILP
 - Implement an heuristic similar to RACRtune demo⁵ of Daniel Langner and Johannes Mey
- Apply static analysis where appropriate, e.g.
 - Abstract Interpretation [CC77, Ros90] to estimate energy consumption [JM06, RMM03]
 - Describe decisions [Dan15]
 - Find configurations, which can never be used
 - Unify constraints (in contracts) of modes
- Extend AG
 - Describe multiple systems and their interaction, e.g. [WSG⁺13]
 - Include behavior model for more fine grained description

⁵Shown at HAEC review and OUTPUT'15

An example application of static analysis

WCET squeezing [KKZ13]

- Combines ILP solving with symbolic execution [Kin76] (SE)
- Iterative, alternating, automatic approach
- SE either tighten found bound – or proves it precise

Application to HAEC use case

- Do WCEC squeezing
 - worst case energy consumption
 - based on energy contracts

References I

- [Bür12] Christoff Bürger. Racr: A scheme library for reference attribute grammar controlled rewriting. 2012.
- [CC77] Patrick Cousot and Radhia Cousot. Abstract interpretation. In *Proceedings of the 4th ACM SIGACT-SIGPLAN symposium on Principles of programming languages - POPL '77*, pages 238–252, New York, New York, USA, January 1977. ACM Press.
- [Dan15] Antonia Danylenko. *Decision Algebra: A General Approach to Learning and Using Classifiers*. PhD thesis, Linnaeus University, Växjö, Sweden, 2015.
- [GKP⁺14] Sebastian Götz, Thomas Kühn, Christian Piechnick, Georg Püschel, and Uwe Aßmann. A models@ run. time approach for multi-objective self-optimizing software. In *Adaptive and Intelligent Systems*, pages 100–109. Springer, 2014.
- [GWC⁺10] Sebastian Götz, Claas Wilke, Sebastian Cech, Johannes Waltsgott, Ronny Fritzsche, Jan Reimann, and Matthias Schmidt. *THEATRE Resource Manager Interface Specification v. 1.0*. Techn. Univ., Fakultät Informatik, 2010.
- [JM06] R. Jayaseelan and T. Mitra. Estimating the Worst-Case Energy Consumption of Embedded Software. In *12th IEEE Real-Time and Embedded Technology and Applications Symposium (RTAS'06)*, pages 81–90. IEEE, 2006.
- [Kin76] James C. King. Symbolic execution and program testing. *Communications of the ACM*, 19(7):385–394, July 1976.

References II

- [KKZ13] Jens Knoop, Laura Kovács, and Jakob Zwirchmayr. Wcet squeezing: on-demand feasibility refinement for proven precise wcet-bounds. In *Proceedings of the 21st International conference on Real-Time Networks and Systems*, pages 161–170. ACM, 2013.
- [RMM03] Cosmin Rusu, Rami Melhem, and Daniel Mossé. Maximizing rewards for real-time applications with energy constraints. *ACM Transactions on Embedded Computing Systems*, 2(4):537–559, November 2003.
- [Ros90] Mads Rosendahl. Abstract interpretation using attribute grammars. pages 143–156, September 1990.
- [Sah96] Sartaj Sahni. Scheduling master-slave multiprocessor systems. *IEEE transactions on Computers*, (10):1195–1199, 1996.
- [WSG⁺13] Danny Weyns, Bradley Schmerl, Vincenzo Grassi, Sam Malek, Raffaella Mirandola, Christian Prehofer, Jochen Wuttke, Jesper Andersson, Holger Giese, and Karl M. Göschka. On patterns for decentralized control in self-adaptive systems. In *Software Engineering for Self-Adaptive Systems II*, volume 7475 LNCS, pages 76–107. Springer, 2013.