

Efficient Black-box Checking of Snapshot Isolation in Databases

(Conference VLDB'2024)

Hengfeng Wei

hfwei@nju.edu.cn

August 15, 2023




Transaction and Isolation Level

A transaction is a *group* of operations that is executed *atomically*.

```
x1 ← R(acct1)  
x2 ← R(acct2)  
if x1 + x2 > 100  
  x2 ← x2 - 100  
  W(acct2, x2)
```

acct1 = acct2 = 60



Transaction and Isolation Level

A transaction is a *group* of operations that is executed *atomically*.

```
x1 ← R(acct1)
x2 ← R(acct2)
if x1 + x2 > 100
  x1 ← x1 - 100
  W(acct1, x1)
```

```
x1 ← R(acct1)
x2 ← R(acct2)
if x1 + x2 > 100
  x2 ← x2 - 100
  W(acct2, x2)
```


```
x1 ← R(acct1)
x2 ← R(acct2)
```

$acct_1 = acct_2 = 60$



Transaction and Isolation Level


A transaction is a *group* of operations that is executed *atomically*.

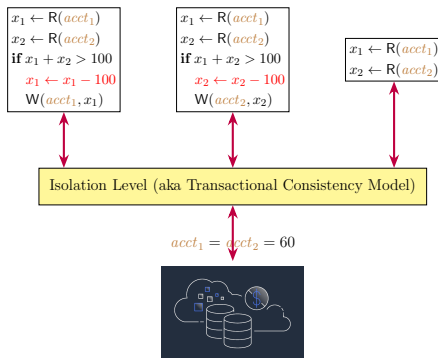

The isolation levels specify how they are isolated from each other.


Serializability (SER)

All transactions appear to execute in some total order.

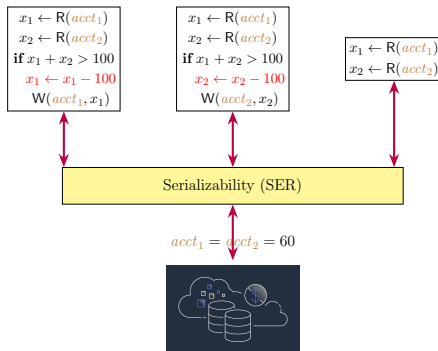


Serializability (SER)

All transactions appear to execute in some total order.

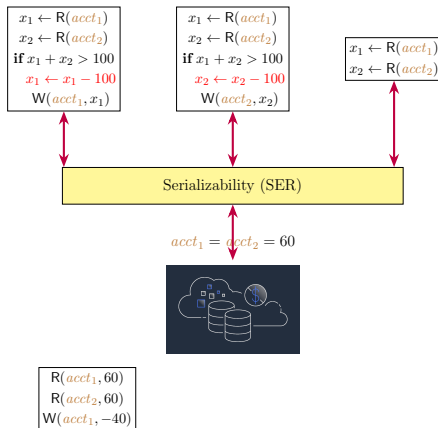


Serializability (SER)

All transactions appear to execute in some total order.

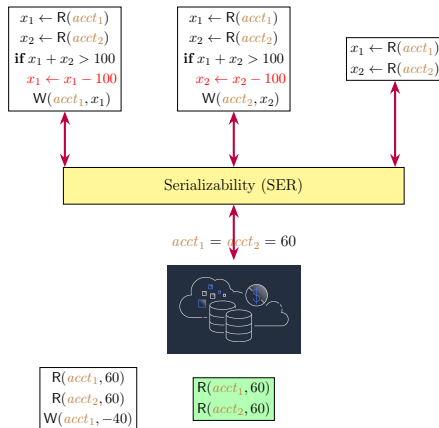


Serializability (SER)

All transactions appear to execute in some total order.

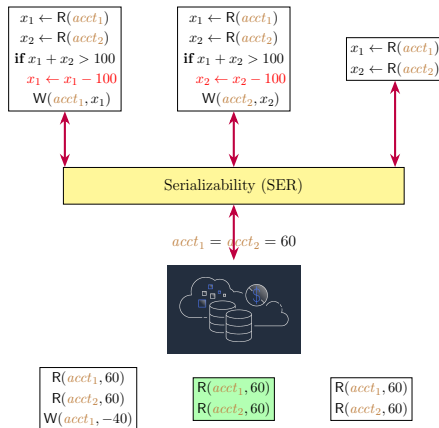


Serializability (SER)

All transactions appear to execute in some total order.

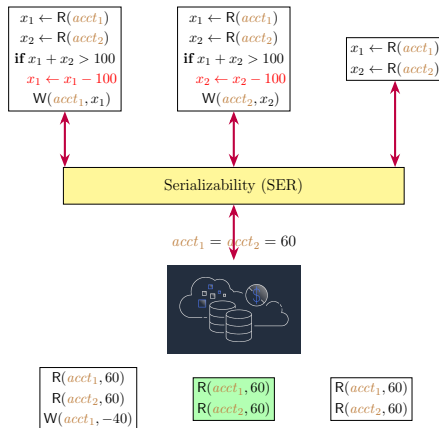


too expensive, especially for distributed transactions


Snapshot Isolation (SI)

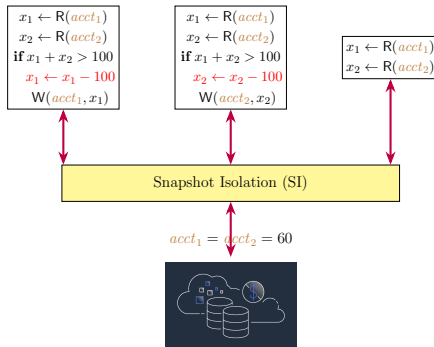


Snapshot Isolation (SI)

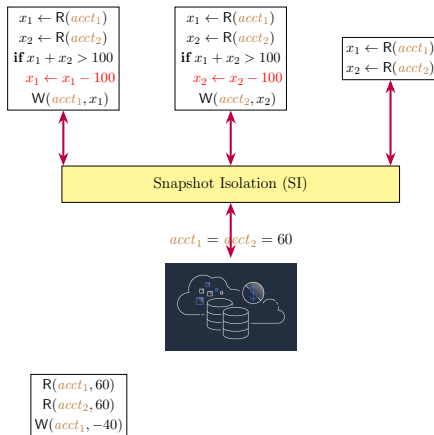


Snapshot Isolation (SI)

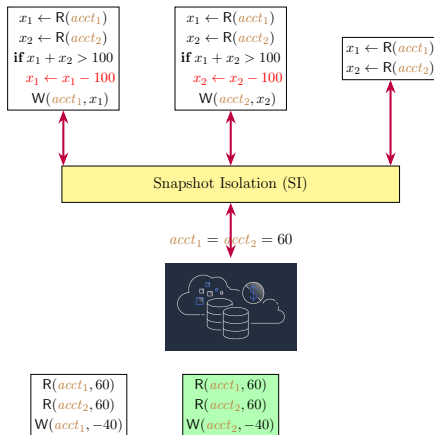


Snapshot Isolation (SI)

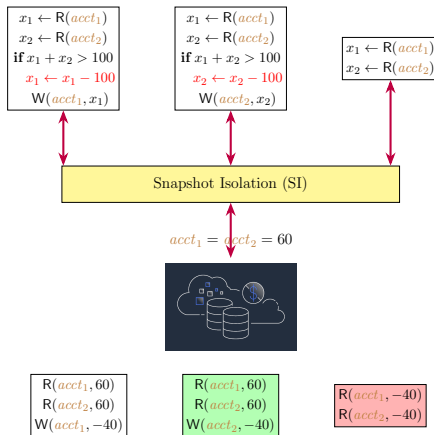


Snapshot Isolation (SI)

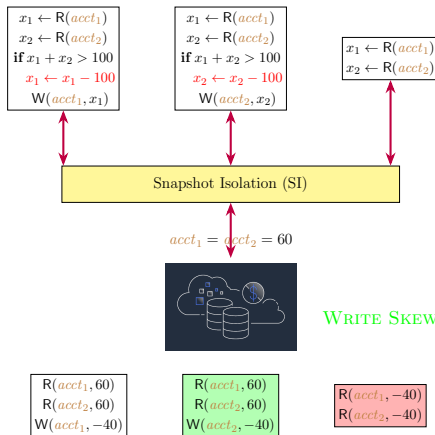

Snapshot Isolation (SI)

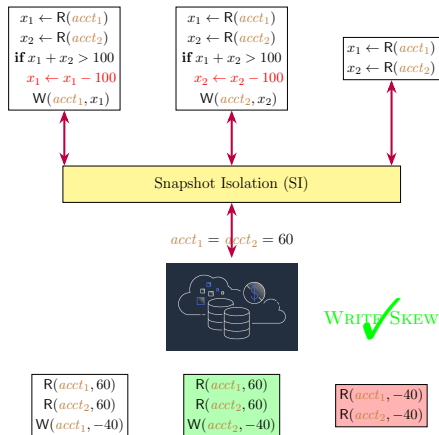


Snapshot Isolation (SI)

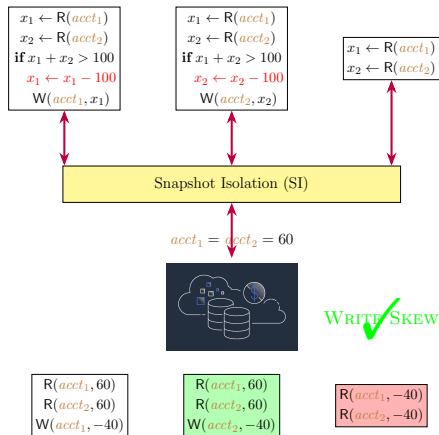


Snapshot Read: Each transaction reads data from a *snapshot* of committed data valid as of the (logical) time the transaction started.


Snapshot Isolation (SI)

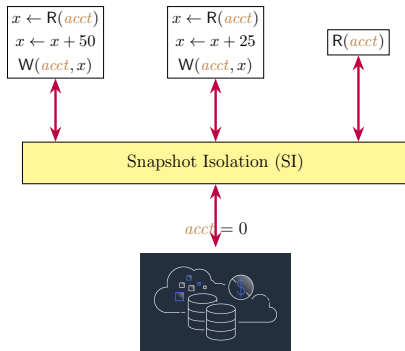


Snapshot Isolation (SI)

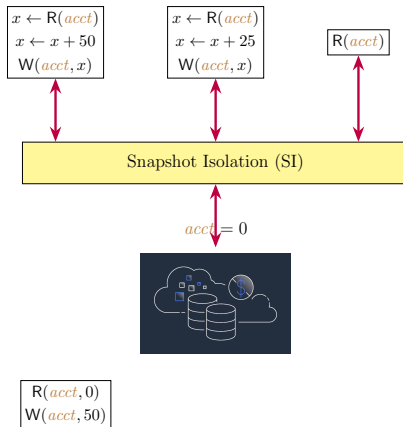

Snapshot Isolation (SI)

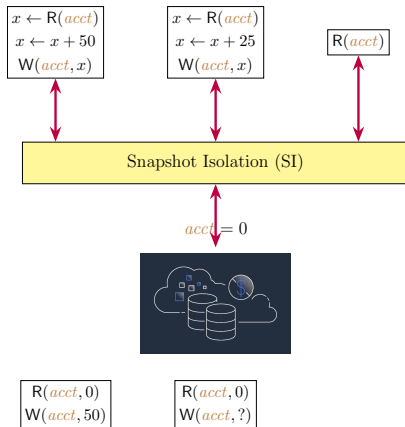


Snapshot Isolation (SI)

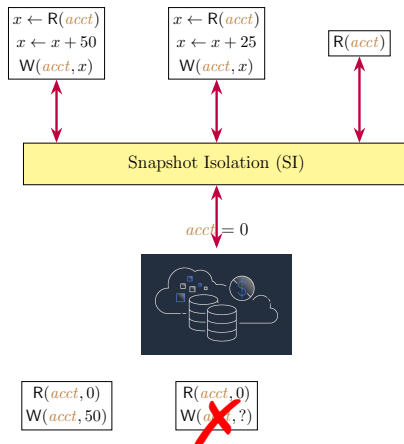


Snapshot Write: Concurrent transactions cannot write to the same key. One of them must be aborted.

Snapshot Isolation (SI)

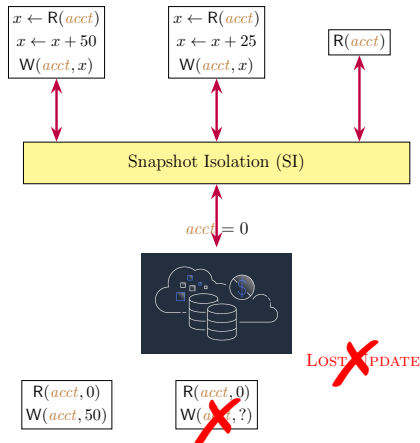


Snapshot Write: Concurrent transactions cannot write to the same key. One of them must be aborted.

Snapshot Isolation (SI)

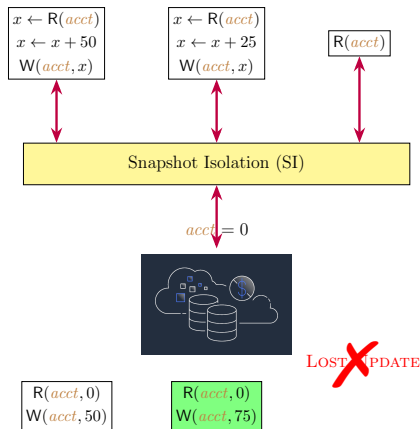


Snapshot Write: Concurrent transactions cannot write to the same key. One of them must be aborted.

Snapshot Isolation (SI)

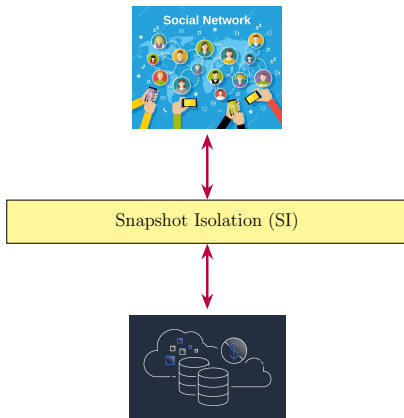


Snapshot Isolation (SI)

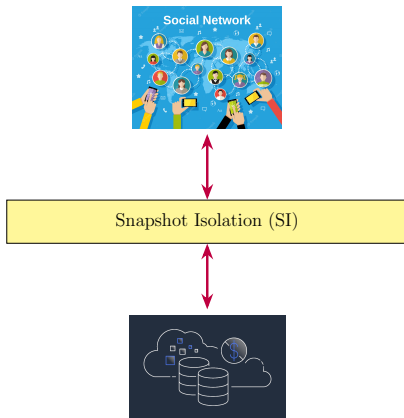


$W(x, post)$


Snapshot Isolation (SI)

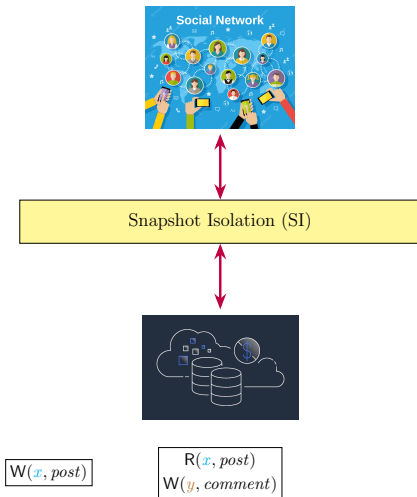


Snapshot Isolation (SI)

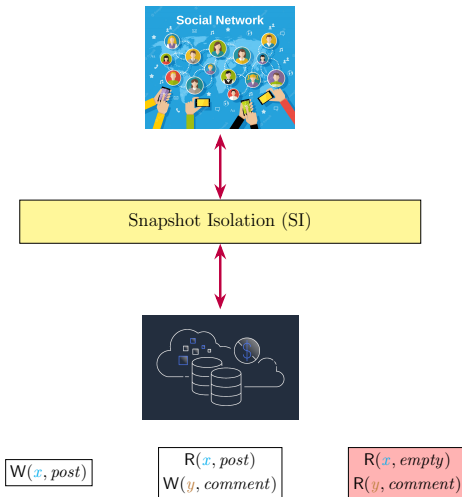

Snapshot Isolation (SI)

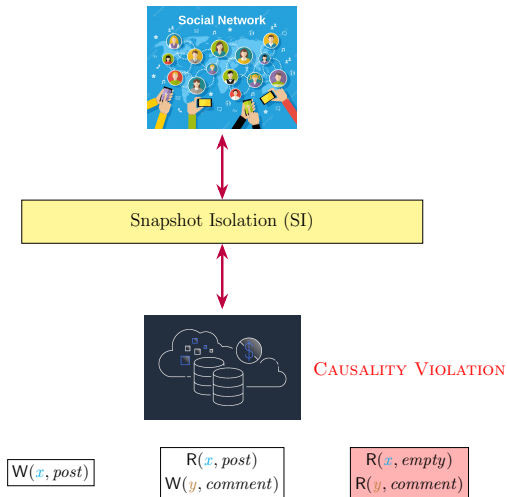

Snapshot Isolation (SI)

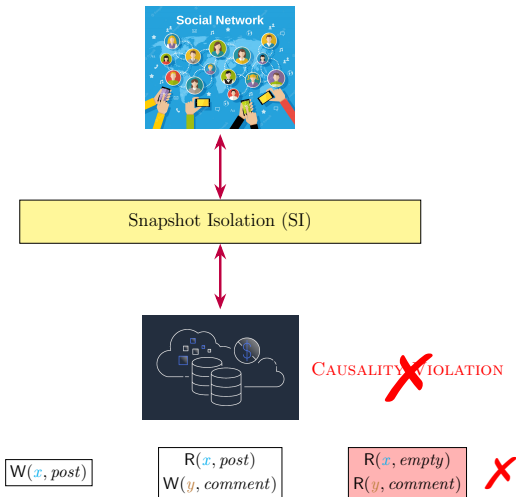

Databases and Snapshot Isolation

database logos

Many databases claim to support SI.

Databases and Snapshot Isolation


+papers

Databases may fail to provide SI as they claim.

The SI Checking Problem

Definition (The SI Checking Problem)


The SI checking problem is the **decision problem** of determining whether a given **history** $\mathcal{H} = (T, SO)$ satisfies SI?

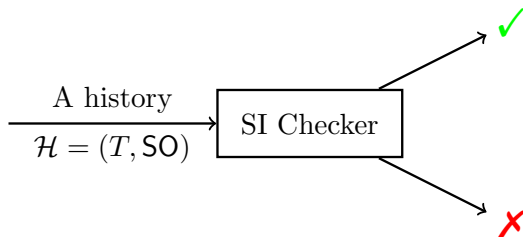

The SI Checking Problem

Definition (The SI Checking Problem)

The SI checking problem is the **decision problem** of determining whether a given **history** $\mathcal{H} = (T, SO)$ satisfies SI?

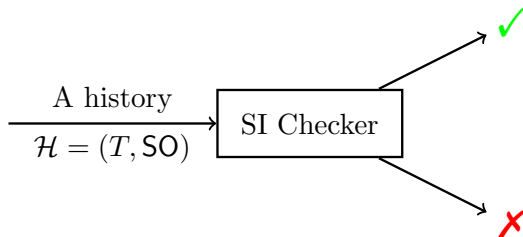

SO : *session order* among the set T of transactions

The SI Checking Problem


Black-box checking: do not rely on database internals



The histories are collected from database logs.

The SI Checking Problem


Black-box checking: do not rely on database internals

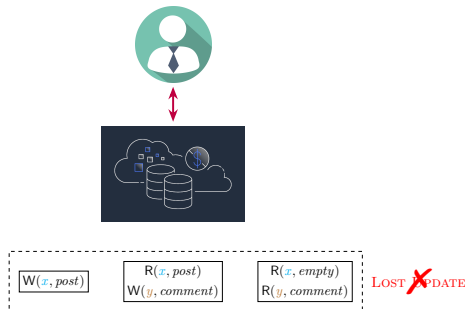

The histories are collected from database logs.


The SI Checking Problem

Black-box checking: do not rely on database internals

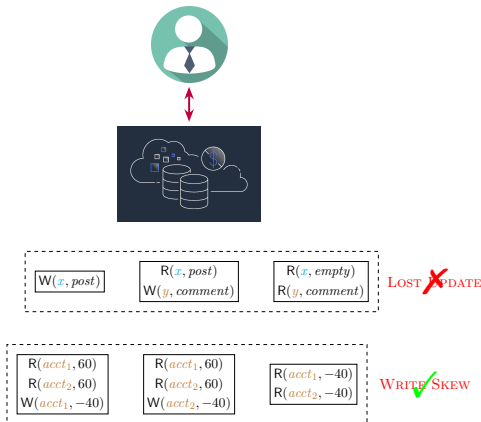


The histories are collected from database logs.

The SI Checking Problem

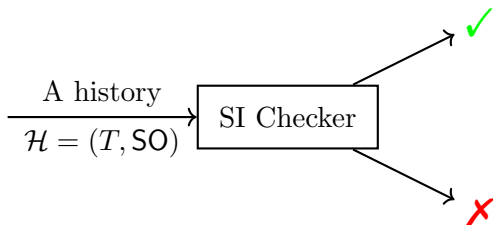


The SI Checking Problem

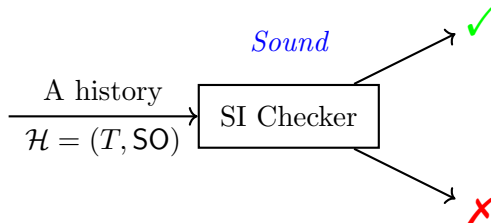


Sound: If the checker says **X**, then the history does *not* satisfy SI.

The SI Checking Problem

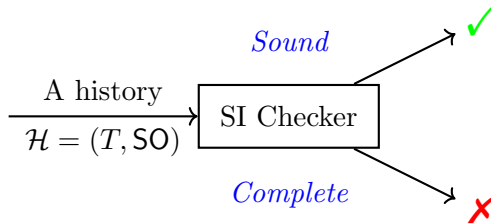


Complete: If the checker says ✓, then the history *satisfies* SI.

The SI Checking Problem

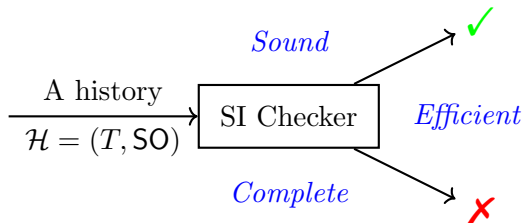

Efficient: The checker should *scale* up to large workloads.

The SI Checking Problem

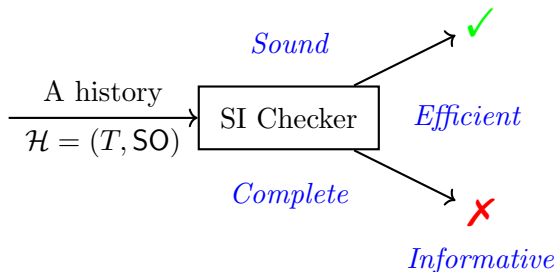


Informative: The checker should provide understandable *counterexamples* if it says **X**.


The SI Checking Problem

related-work


Contribution: the POLYSI Checker

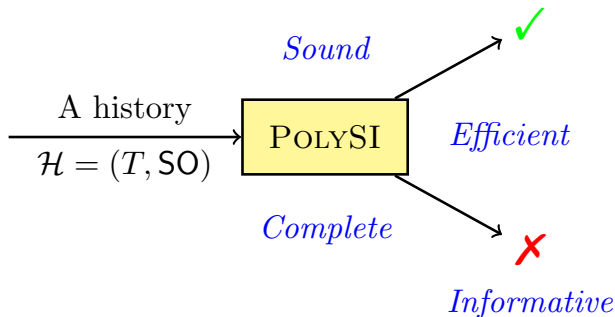

Contribution: the POLYSI Checker

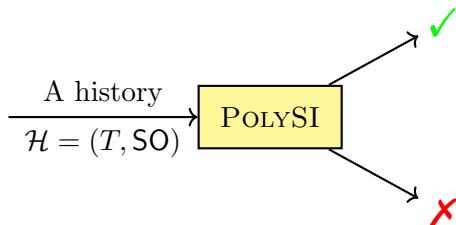


Contribution: the POLYSI Checker

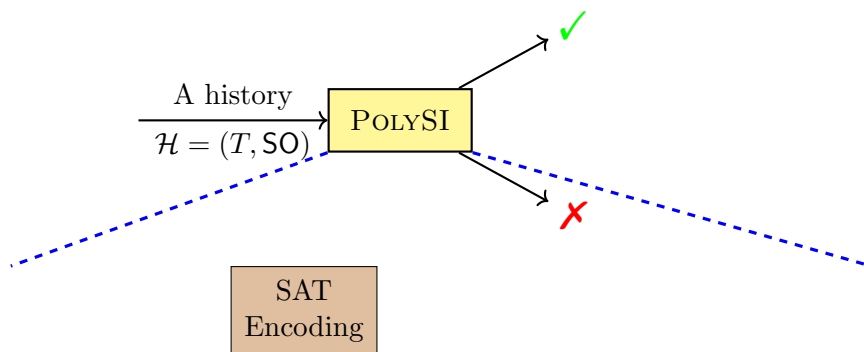


Sound & Complete: polygraph-based characterization of SI

Contribution: the POLYSI Checker

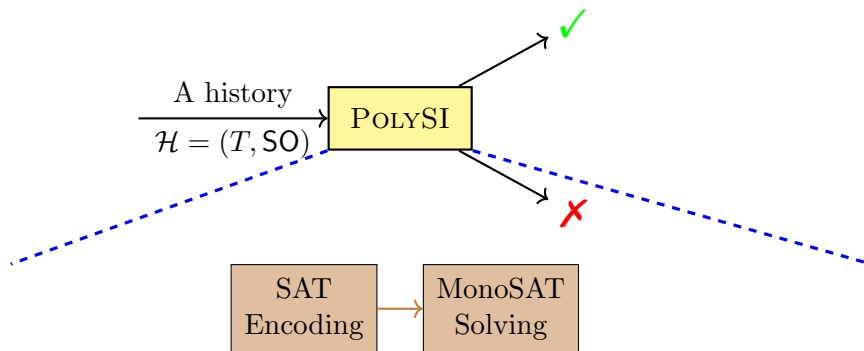


Efficient: utilizing MonoSAT solver optimized for graph problems

Contribution: the POLYSI Checker

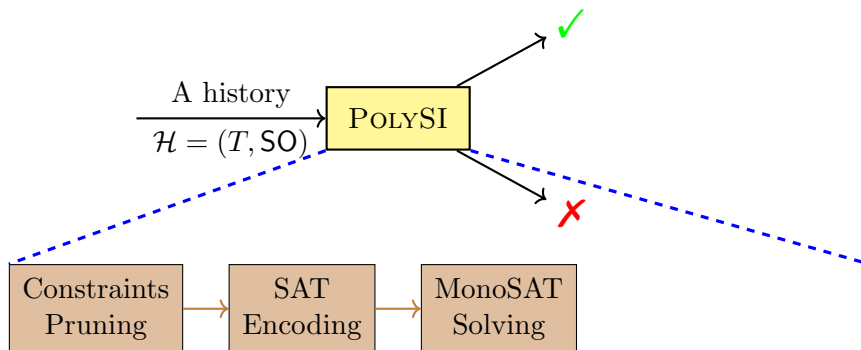


Efficient: domain-specific pruning before encoding

Contribution: the POLYSI Checker

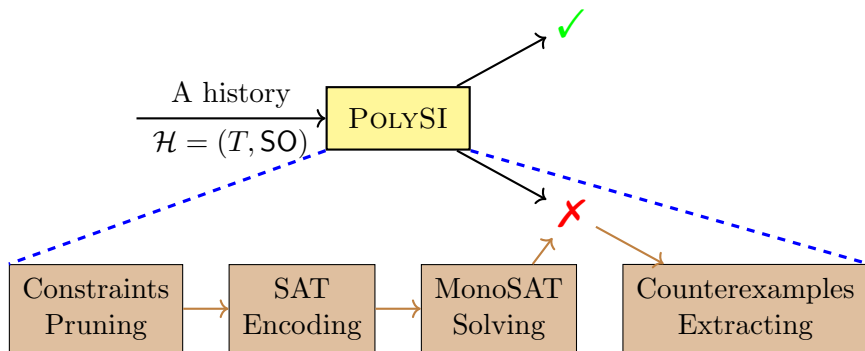


Informative: extract counterexamples from the unsatisfiable core

Dependency Graph-based Characterization of SI

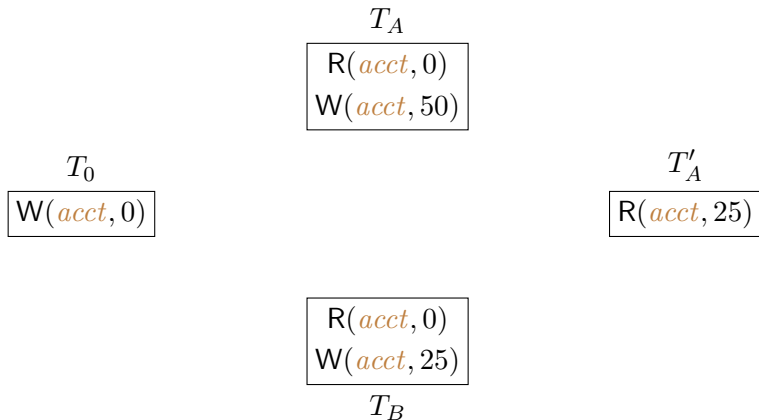


Dependency Graph-based Characterization of SI

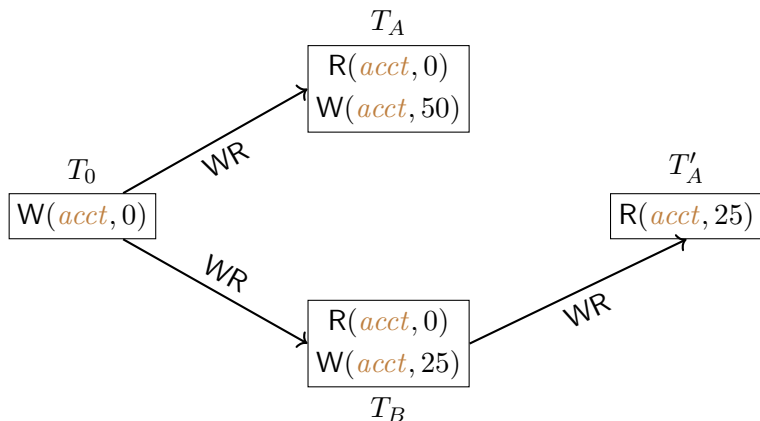


WR: “write-read” dependency capturing the “read-from” relation

Dependency Graph-based Characterization of SI

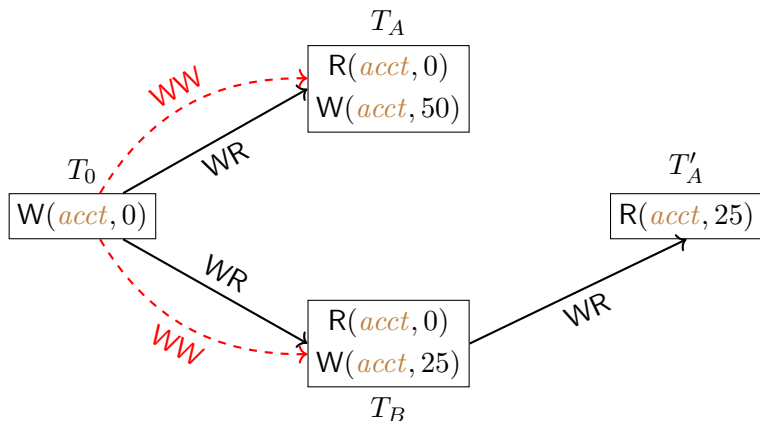

WW: “write-write” dependency capturing the version order


Dependency Graph-based Characterization of SI

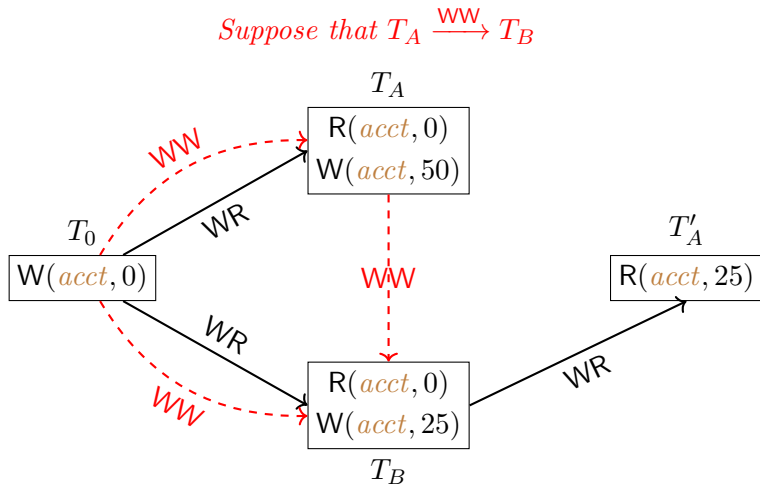

WW: “write-write” dependency capturing the version order

Dependency Graph-based Characterization of SI


$$T_0 \xrightarrow{WR} T_A \wedge T_0 \xrightarrow{WW} T_B \implies T_A \xrightarrow{RW} T_B$$

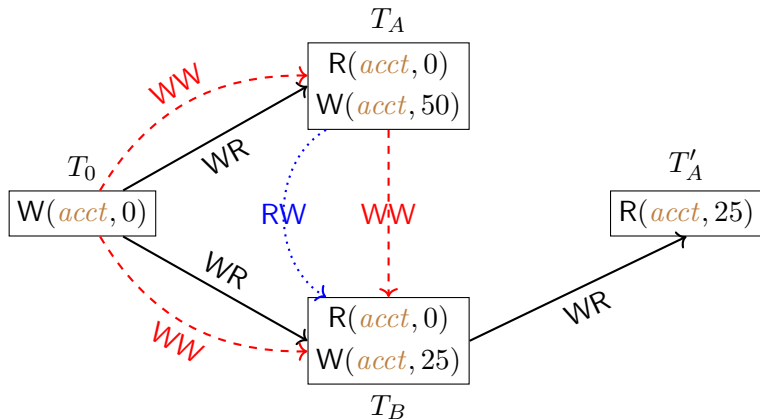

RW: “read-write” dependency capturing the overwritten relation

Dependency Graph-based Characterization of SI


$$T_0 \xrightarrow{WR} T_B \wedge T_0 \xrightarrow{WW} T_A \implies T_A \xrightarrow{RW} T_A$$

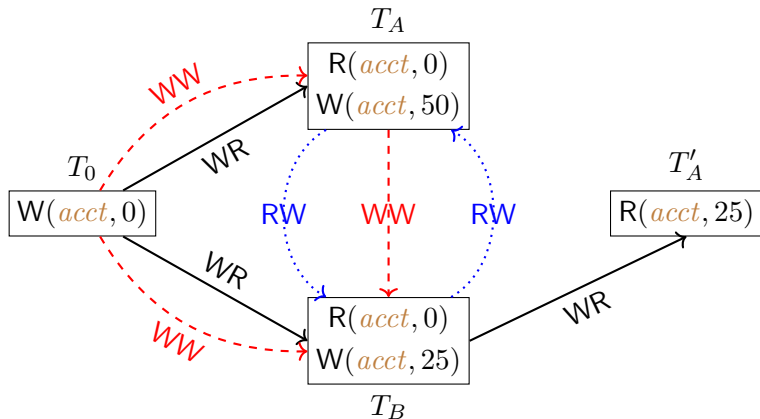

RW: “read-write” dependency capturing the overwritten relation


Dependency Graph-based Characterization of SI

Suppose that $T_A \xrightarrow{WW} T_B$

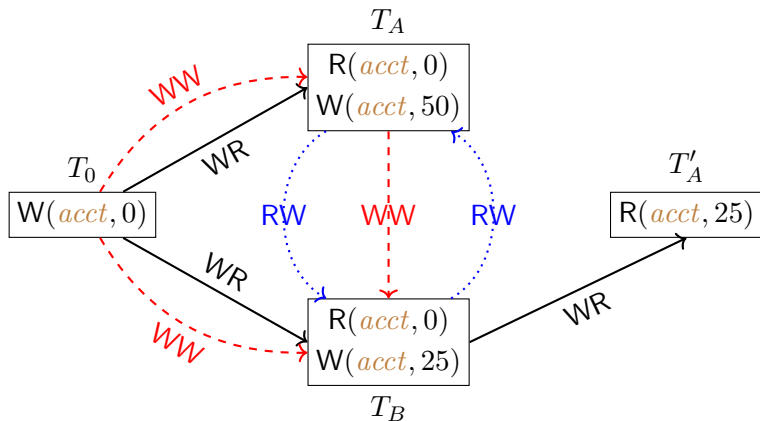


undesired cycle: $T_A \xrightarrow{WW} T_B \xrightarrow{RW} T_A$

Dependency Graph-based Characterization of SI

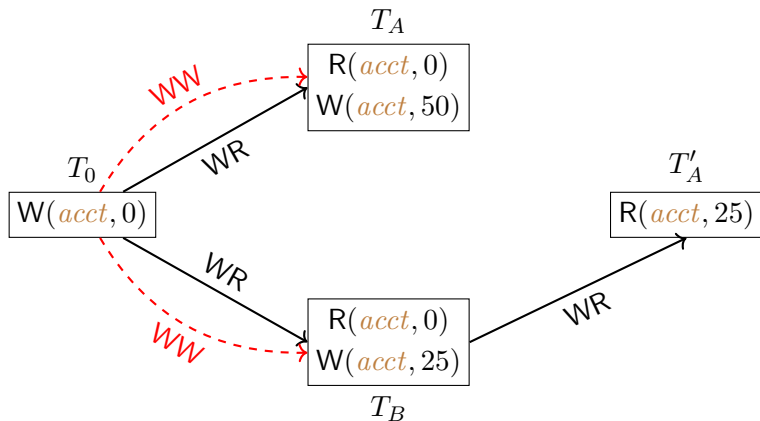


Dependency Graph-based Characterization of SI

Suppose that $T_B \xrightarrow{WW} T_A$

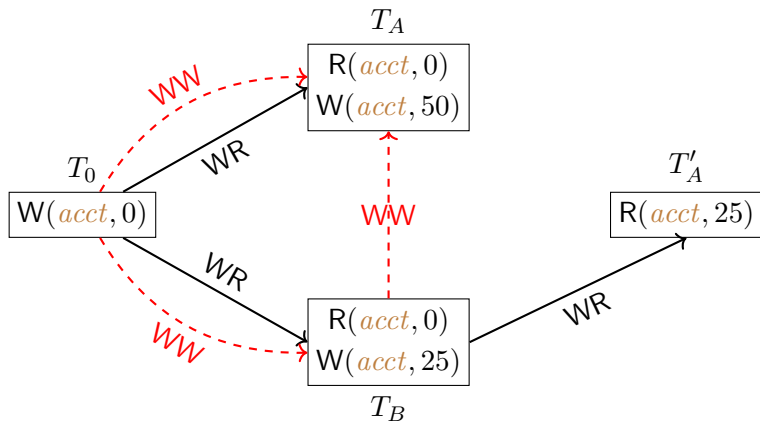


Dependency Graph-based Characterization of SI

Suppose that $T_B \xrightarrow{WW} T_A$

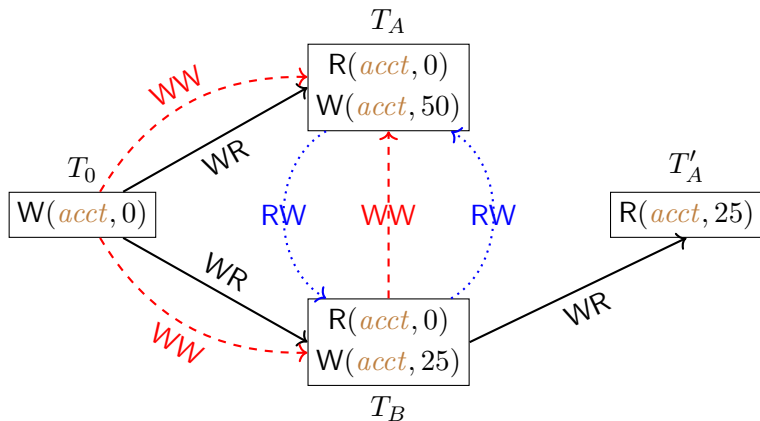


Dependency Graph-based Characterization of SI

Suppose that $T_B \xrightarrow{WW} T_A$

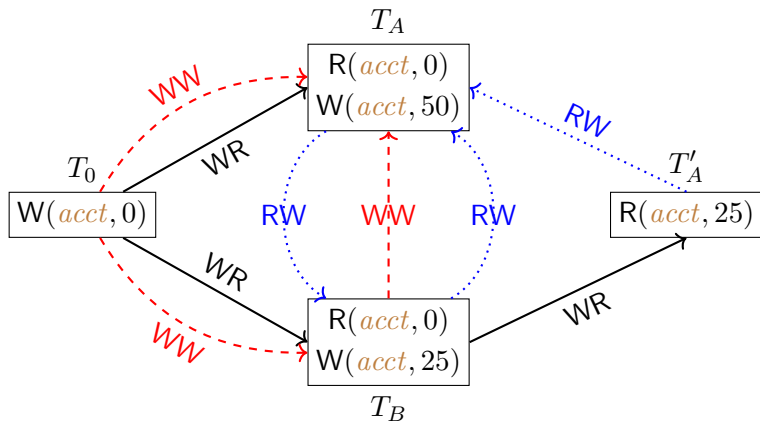

Dependency Graph-based Characterization of SI


Suppose that $T_B \xrightarrow{WW} T_A$

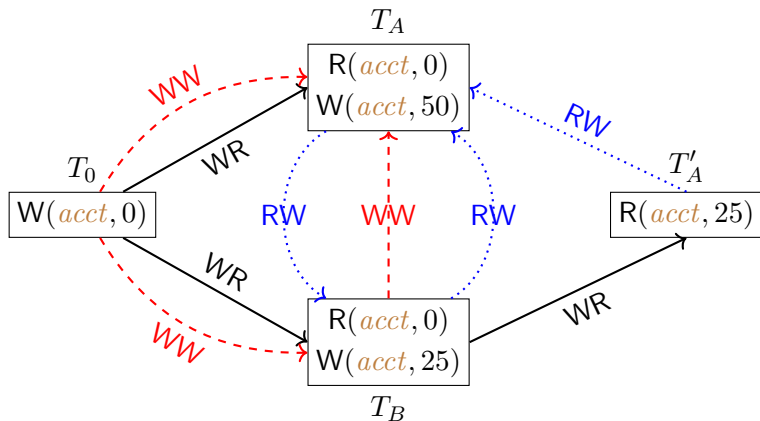

undesired cycle: $T_B \xrightarrow{WW} T_A \xrightarrow{RW} T_B$

Dependency Graph-based Characterization of SI

We have considered both bases $T_A \xrightarrow{WW} T_B$ and $T_B \xrightarrow{WW} T_A$.

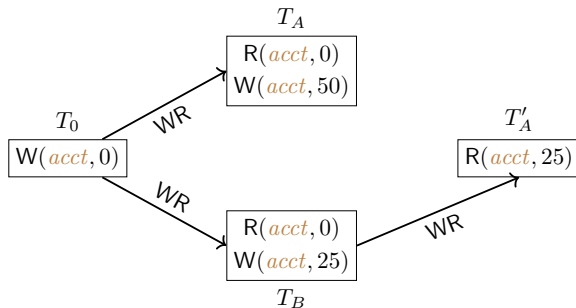

Either case leads to an undesired cycle.


Therefore, it does not satisfy SI.


Dependency Graph-based Characterization of SI

Theorem (Theorem 4.1 of [Cerone and Gotsman, 2018])

*Informally, a history satisfies SI if only if
there exists a dependency graph for it that contains
only cycles (if any) with **at least two adjacent RW** edges.*

Dependency Graph-based Characterization of SI

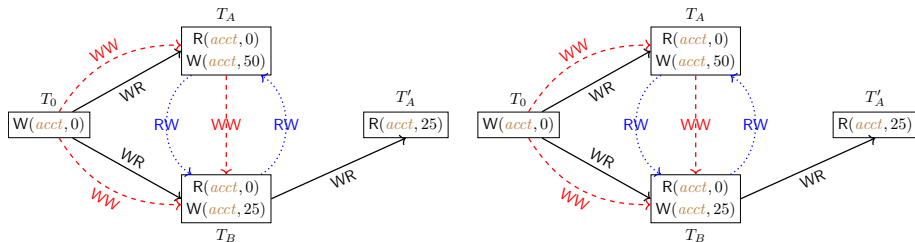

Every possible dependency graph contains an undesired  cycle.


Dependency Graph-based Characterization of SI

Theorem (Theorem 4.1 of [Cerone and Gotsman, 2018])

For a history $\mathcal{H} = (T, \text{SO})$,

$$\mathcal{H} \models \text{SI} \iff \mathcal{H} \models \text{INT} \wedge$$

$$\exists \text{WR, WW, RW. } \mathcal{G} = (\mathcal{H}, \text{WR, WW, RW}) \wedge \\ (((\text{SO}_{\mathcal{G}} \cup \text{WR}_{\mathcal{G}} \cup \text{WW}_{\mathcal{G}}) ; \text{RW}_{\mathcal{G}}?) \text{ is acyclic}).$$

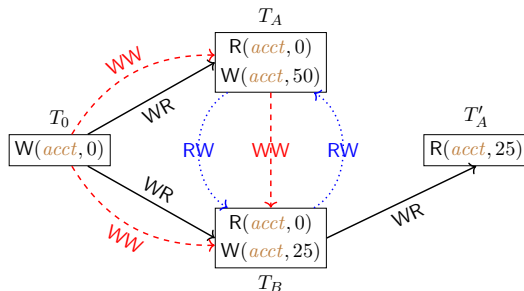


Dependency Graph-based Characterization of SI

Theorem (Theorem 4.1 of [Cerone and Gotsman, 2018])

For a history $\mathcal{H} = (T, \text{SO})$,

$$\mathcal{H} \models \text{SI} \iff \mathcal{H} \models \text{INT} \wedge$$

$$\exists \text{WR, WW, RW. } \mathcal{G} = (\mathcal{H}, \text{WR, WW, RW}) \wedge \\ (((\text{SO}_{\mathcal{G}} \cup \text{WR}_{\mathcal{G}} \cup \text{WW}_{\mathcal{G}}) ; \text{RW}_{\mathcal{G}}?) \text{ is acyclic}).$$

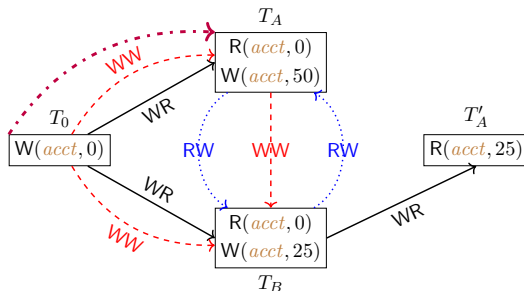


Dependency Graph-based Characterization of SI

Theorem (Theorem 4.1 of [Cerone and Gotsman, 2018])

For a history $\mathcal{H} = (T, \text{SO})$,

$$\mathcal{H} \models \text{SI} \iff \mathcal{H} \models \text{INT} \wedge$$

$$\exists \text{WR, WW, RW. } \mathcal{G} = (\mathcal{H}, \text{WR, WW, RW}) \wedge \\ (((\text{SO}_{\mathcal{G}} \cup \text{WR}_{\mathcal{G}} \cup \text{WW}_{\mathcal{G}}) ; \text{RW}_{\mathcal{G}}?) \text{ is acyclic}).$$

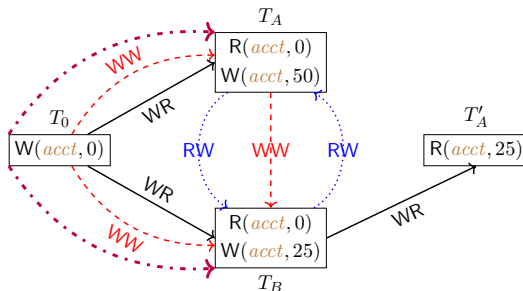


Dependency Graph-based Characterization of SI

Theorem (Theorem 4.1 of [Cerone and Gotsman, 2018])

For a history $\mathcal{H} = (T, \text{SO})$,

$$\mathcal{H} \models \text{SI} \iff \mathcal{H} \models \text{INT} \wedge$$

$$\exists \text{WR, WW, RW. } \mathcal{G} = (\mathcal{H}, \text{WR, WW, RW}) \wedge \\ (((\text{SO}_{\mathcal{G}} \cup \text{WR}_{\mathcal{G}} \cup \text{WW}_{\mathcal{G}}) ; \text{RW}_{\mathcal{G}}?) \text{ is acyclic}).$$

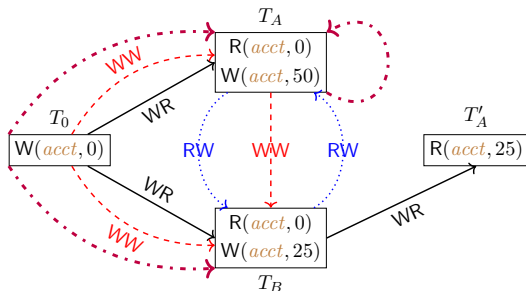


Dependency Graph-based Characterization of SI

Theorem (Theorem 4.1 of [Cerone and Gotsman, 2018])

For a history $\mathcal{H} = (T, \text{SO})$,


$$\mathcal{H} \models \text{SI} \iff \mathcal{H} \models \text{INT} \wedge$$

$$\exists \text{WR, WW, RW. } \mathcal{G} = (\mathcal{H}, \text{WR, WW, RW}) \wedge \\ (((\text{SO}_{\mathcal{G}} \cup \text{WR}_{\mathcal{G}} \cup \text{WW}_{\mathcal{G}}) ; \text{RW}_{\mathcal{G}}?) \text{ is acyclic}).$$

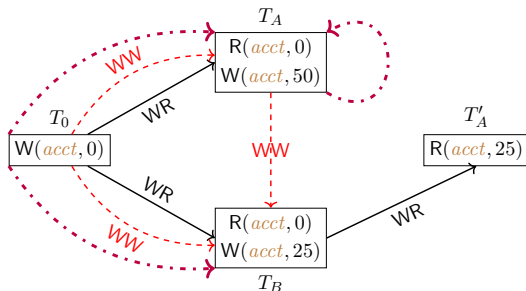


Dependency Graph-based Characterization of SI

\mathcal{Q} : How to capture all possible WW dependencies?

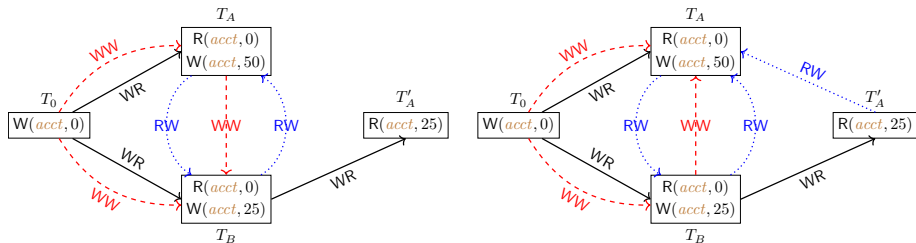




Dependency Graph-based Characterization of SI

\mathcal{Q} : How to capture all possible WW dependencies?


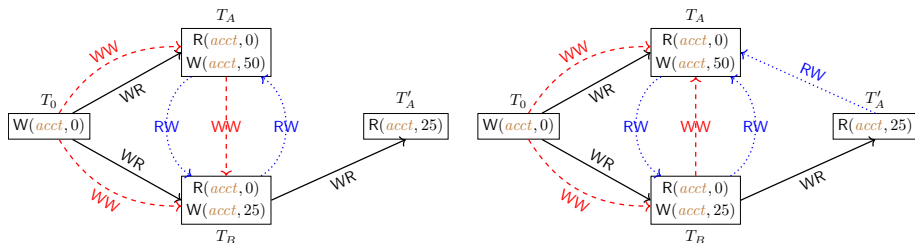


\mathcal{A} : encode them into SAT formulas based on (generalized) polygraphs



Generalized Polygraphs: A Family of Dependency Graphs




Generalized Polygraphs: A Family of Dependency Graphs



Generalized Polygraphs: A Family of Dependency Graphs



Generalized Polygraphs: A Family of Dependency Graphs

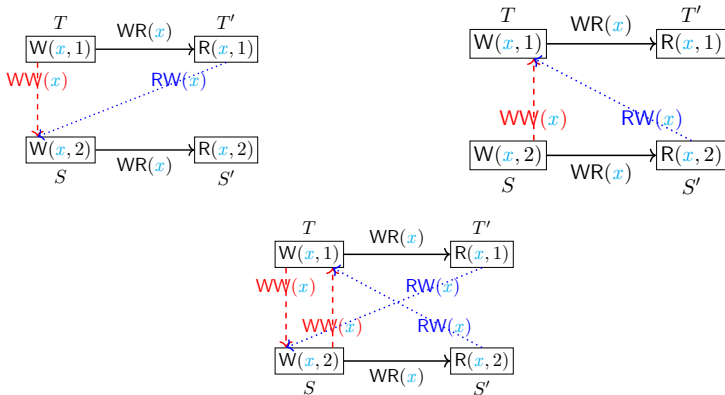

generalized polygraph:

$$\langle \text{either} \triangleq \{T \xrightarrow{WW} S, T' \xrightarrow{RW} S\}, \text{ or } \triangleq \{S \xrightarrow{WW} T, S' \xrightarrow{RW} T\} \rangle$$

POLYSI: An Illustrating Example of “Long Fork”

$$T_0 \boxed{W(\textcolor{blue}{x}, 0) \ W(\textcolor{brown}{y}, 0)}$$

POLYSI: An Illustrating Example of “Long Fork”

$$T_1 \quad \boxed{W(\textcolor{teal}{x}, 1)}$$

$$T_0 \quad \boxed{W(\textcolor{teal}{x}, 0) \ W(\textcolor{brown}{y}, 0)}$$


POLYSI: An Illustrating Example of “Long Fork”

$$\begin{array}{c} T_1 \\ \boxed{W(x, 1)} \end{array}$$


$$T_0 \quad \boxed{W(x, 0) \ W(y, 0)}$$

$$\begin{array}{c} \boxed{W(y, 1)} \\ T_2 \end{array}$$


POLYSI: An Illustrating Example of “Long Fork”

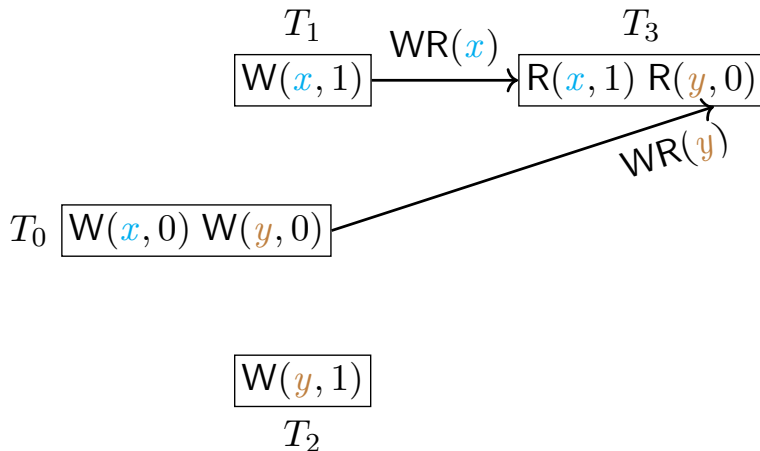

POLYSI: An Illustrating Example of “Long Fork”

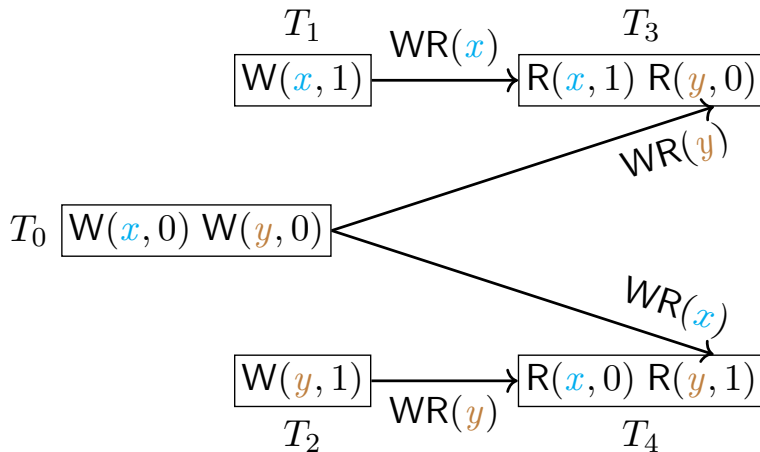


POLYSI: An Illustrating Example of “Long Fork”

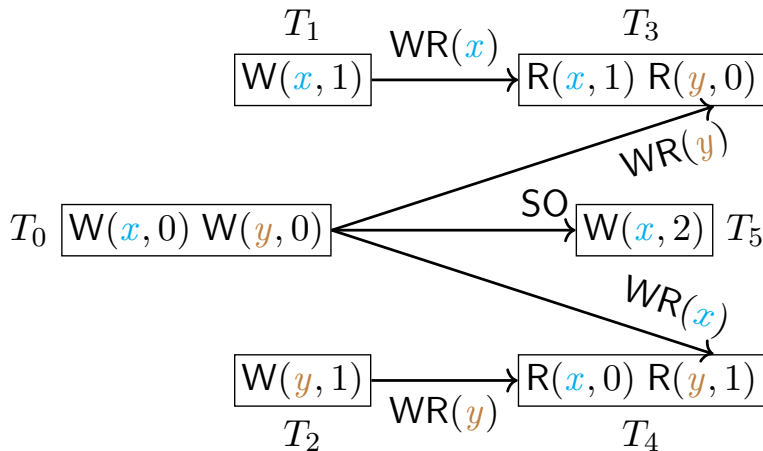


order between T_0 , T_1 , and T_5 (on x) and between T_0 and T_2 (on y)

POLYSI: An Illustrating Example of “Long Fork”

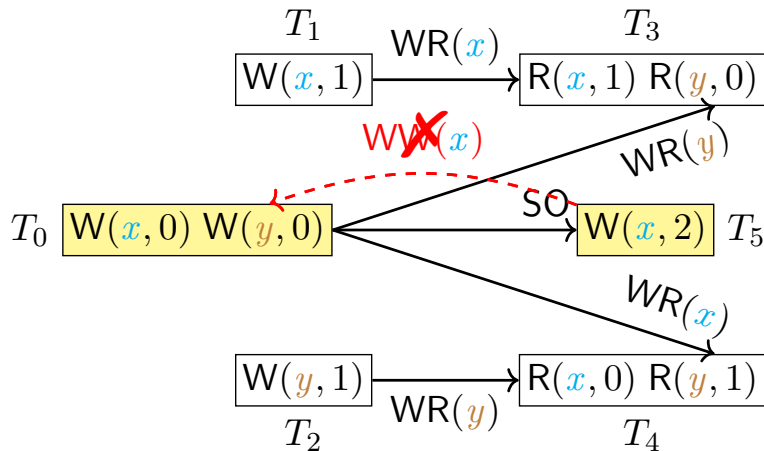


The $T_5 \xrightarrow{WW(x)} T_0$ case is pruned due to $T_0 \xrightarrow{SO} T_5 \xrightarrow{WW(x)} T_0$.

POLYSI: An Illustrating Example of “Long Fork”

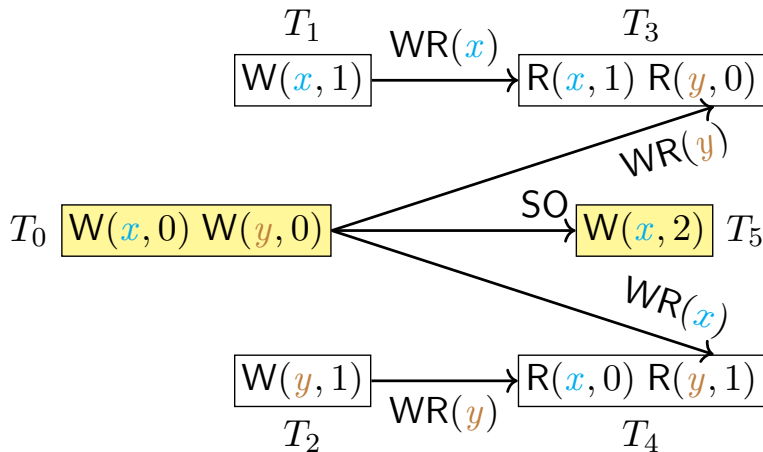


POLYSI: An Illustrating Example of “Long Fork”

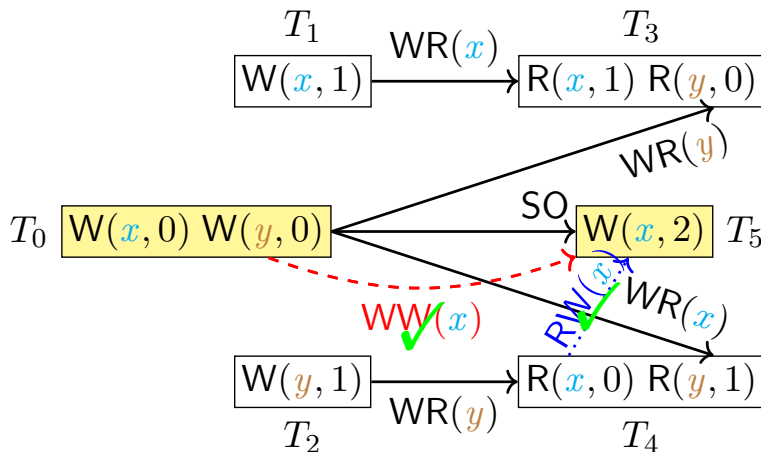


The $T_0 \xrightarrow{WW(x)} T_5$ case becomes known.

POLYSI: An Illustrating Example of “Long Fork”

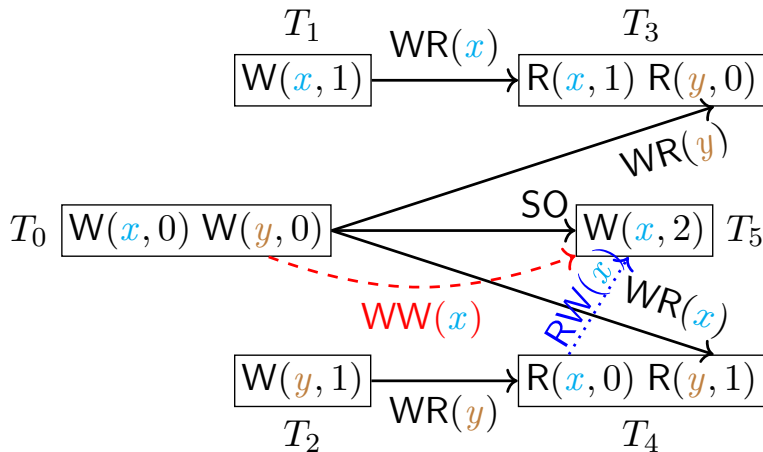


POLYSI: An Illustrating Example of “Long Fork”

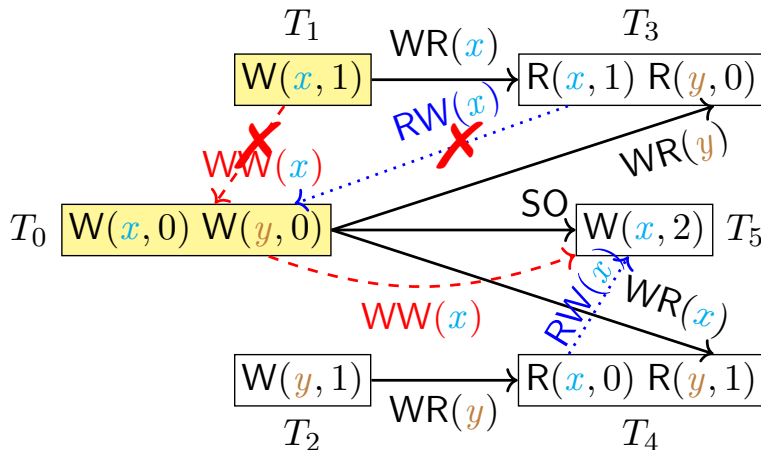


The $T_1 \xrightarrow{\text{WW}(x)} T_0$ case is pruned due to $T_3 \xrightarrow{\text{RW}(x)} T_0 \xrightarrow{\text{WR}(y)} T_3$.

POLYSI: An Illustrating Example of “Long Fork”

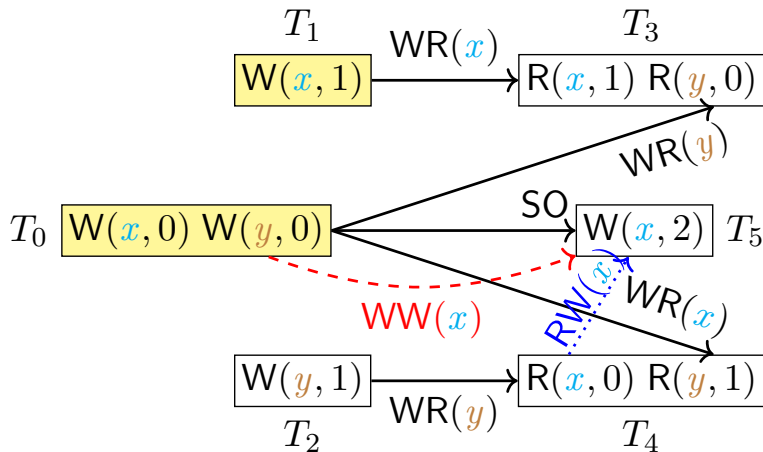


POLYSI: An Illustrating Example of “Long Fork”

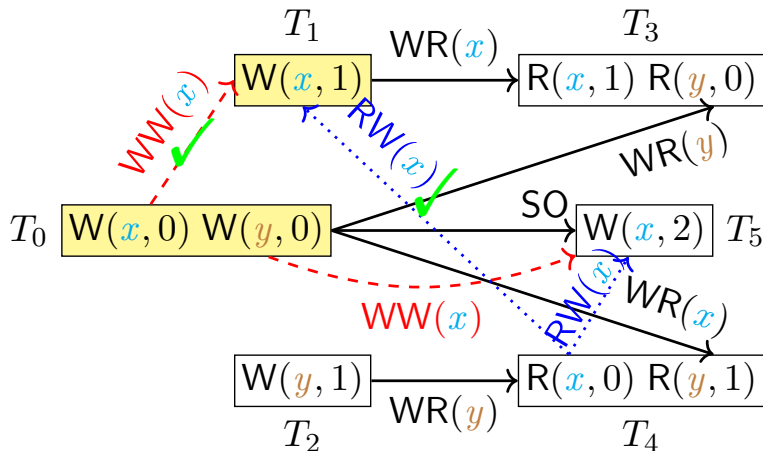


The $T_0 \xrightarrow{WW(x)} T_1$ case becomes known.

POLYSI: An Illustrating Example of “Long Fork”

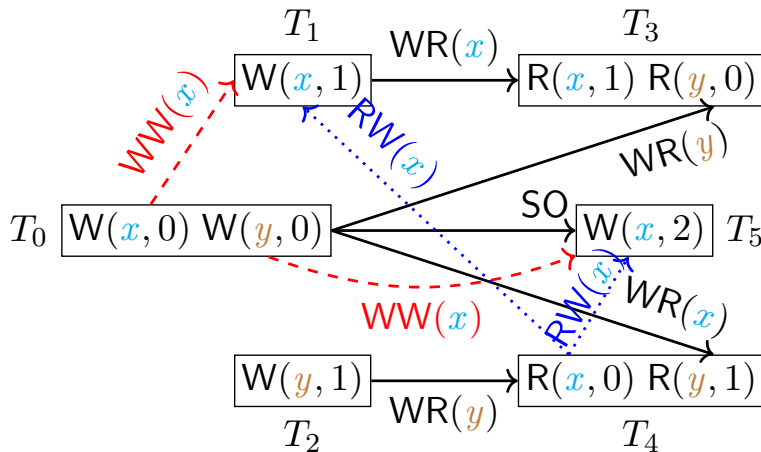


POLYSI: An Illustrating Example of “Long Fork”

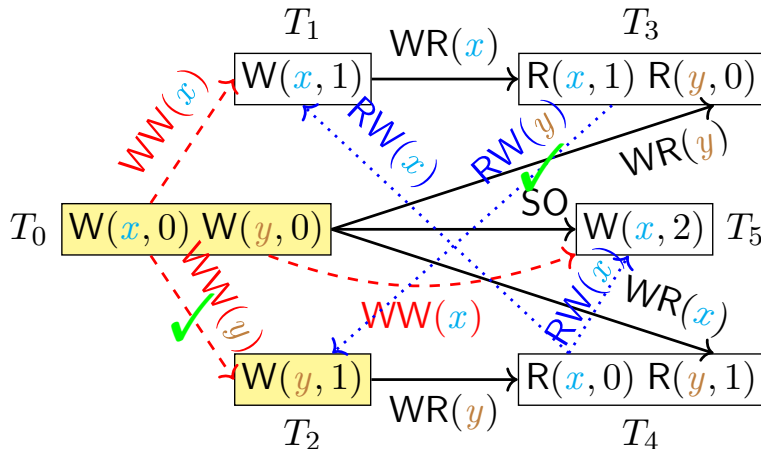


The $T_2 \xrightarrow{WW(y)} T_0$ case is pruned,
 while the $T_0 \xrightarrow{WW(y)} T_2$ case becomes known.

POLYSI: An Illustrating Example of “Long Fork”

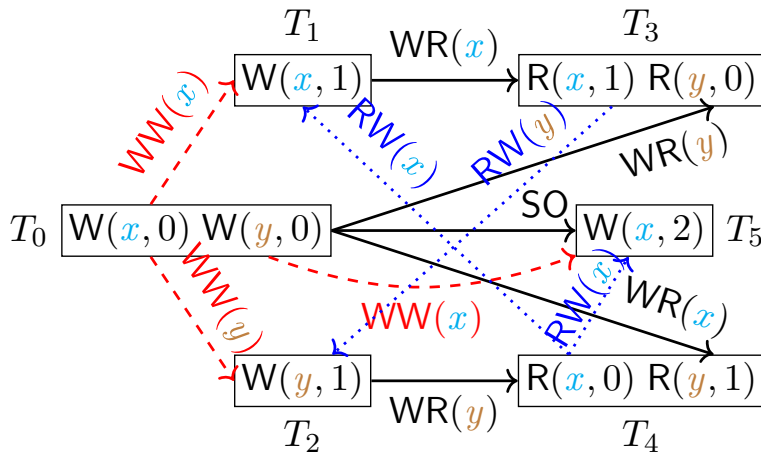


POLYSI: An Illustrating Example of “Long Fork”

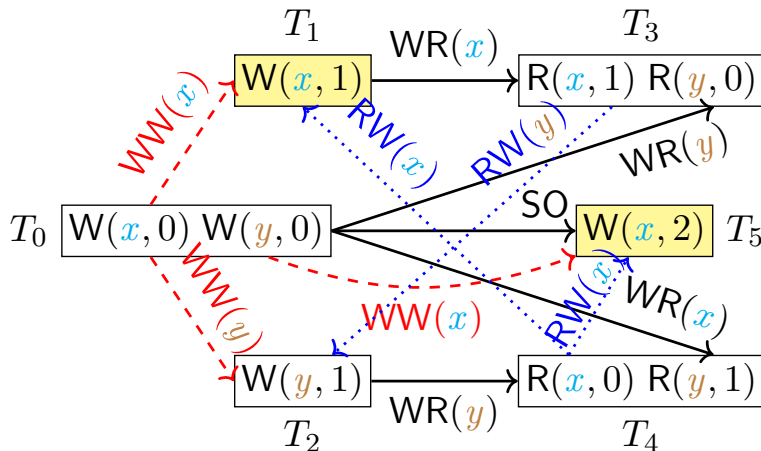

The order between T_1 and T_5 is still uncertain after pruning.

POLYSI: An Illustrating Example of “Long Fork”

\langle , \rangle



T_0 $\boxed{W(x, 0) \ W(y, 0)}$

$\boxed{W(x, 2)}$ T_5

$\boxed{W(y, 1)}$


T_2

$\boxed{R(x, 0) \ R(y, 1)}$

T_4


POLYSI: An Illustrating Example of “Long Fork”

$$\langle \textit{either} = \{T_1 \xrightarrow{WW(x)} T_5, T_3 \xrightarrow{RW(x)} T_5\}, \quad \rangle$$

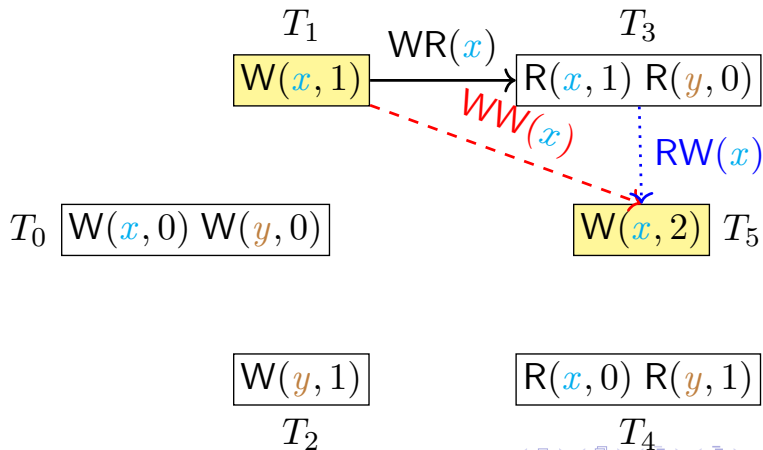


POLYSI: An Illustrating Example of “Long Fork”

$$\langle \textit{either} = \{T_1 \xrightarrow{WW(x)} T_5, T_3 \xrightarrow{RW(x)} T_5\}, \textit{or} = \{T_5 \xrightarrow{WW(x)} T_1\} \rangle$$

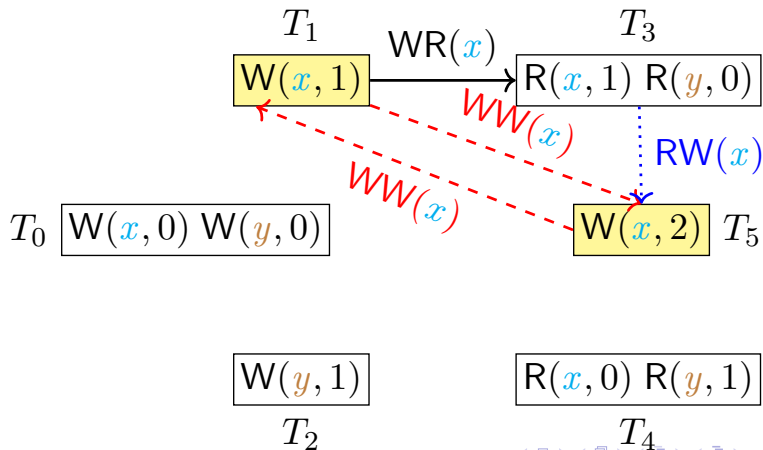

POLYSI: An Illustrating Example of “Long Fork”


$$\langle \textit{either} = \{T_1 \xrightarrow{WW(x)} T_5, T_3 \xrightarrow{RW(x)} T_5\}, \textit{or} = \{T_5 \xrightarrow{WW(x)} T_1\} \rangle$$

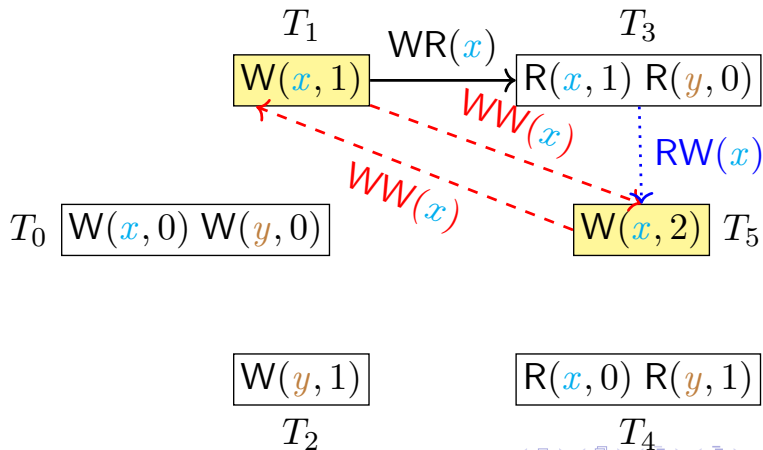

POLYSI: An Illustrating Example of “Long Fork”

POLYSI: An Illustrating Example of “Long Fork”

POLYSI: An Illustrating Example of “Long Fork”

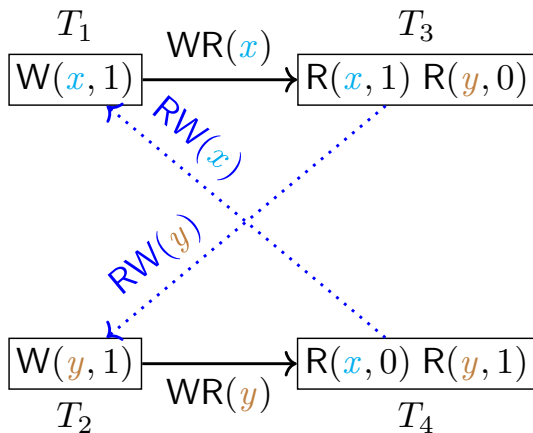

The undesired cycle for “long fork” found by MonoSAT.

Experimental Evaluation

- (1) *Effective*: Can PolySI find SI violations in production databases?
- (2) *Informative*: Can PolySI provide understandable counterexamples for SI violations?
- (3) *Efficient*: How efficient is PolySI? Is it scalable?

Workloads, Benchmarks, and Setup


Finding SI Violations

Understanding Violations

Performance

Scalability

Conclusion

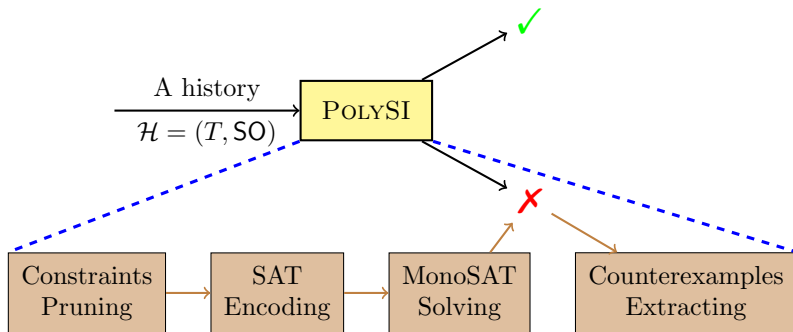



Hengfeng Wei (hfwei@nju.edu.cn)



Cerone, Andrea and Alexey Gotsman (Jan. 2018). “Analysing Snapshot Isolation”. In: *J. ACM* 65.2. ISSN: 0004-5411. DOI: 10.1145/3152396. URL: <https://doi.org/10.1145/3152396>.