
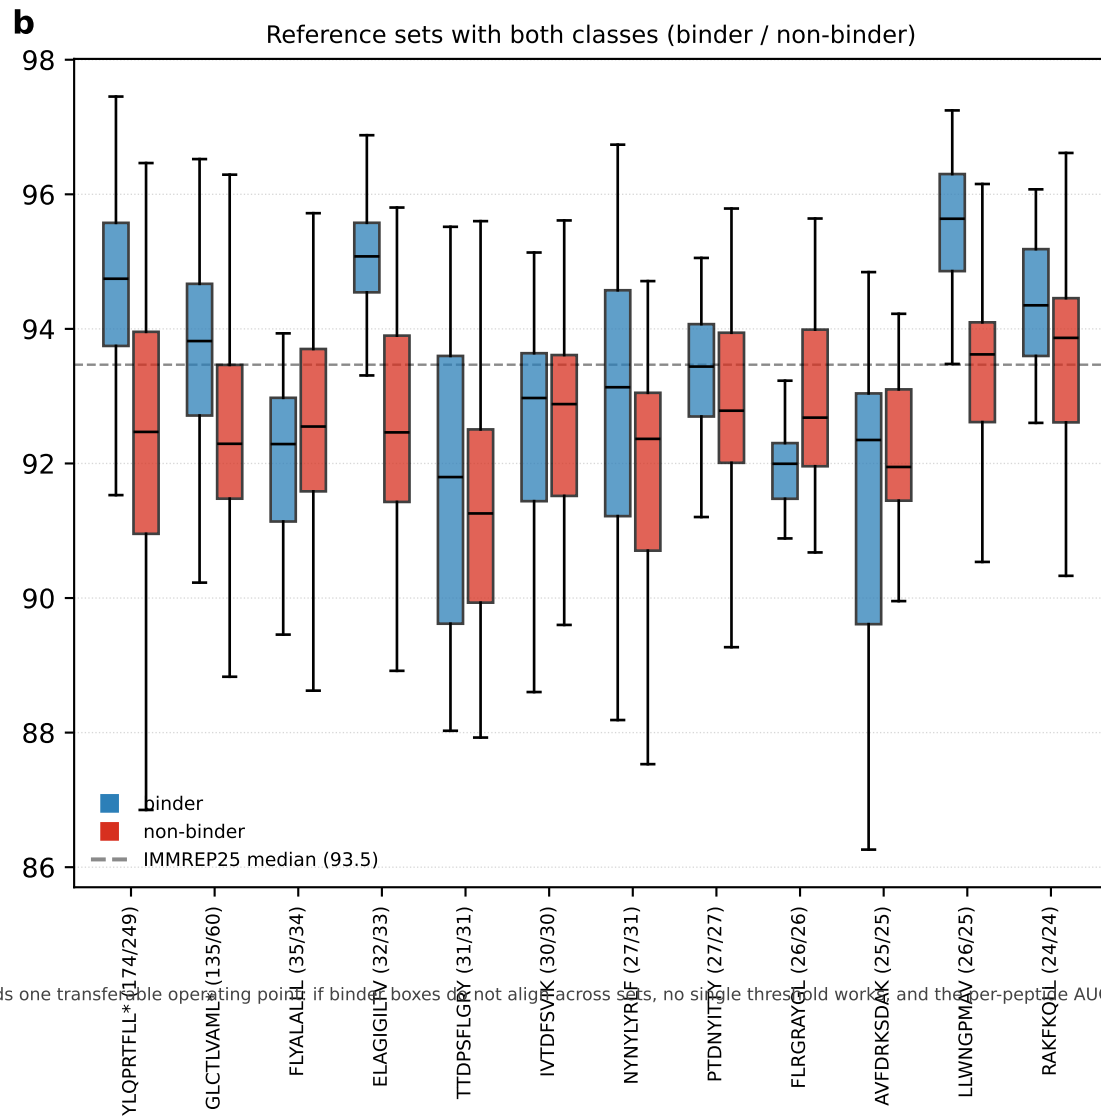


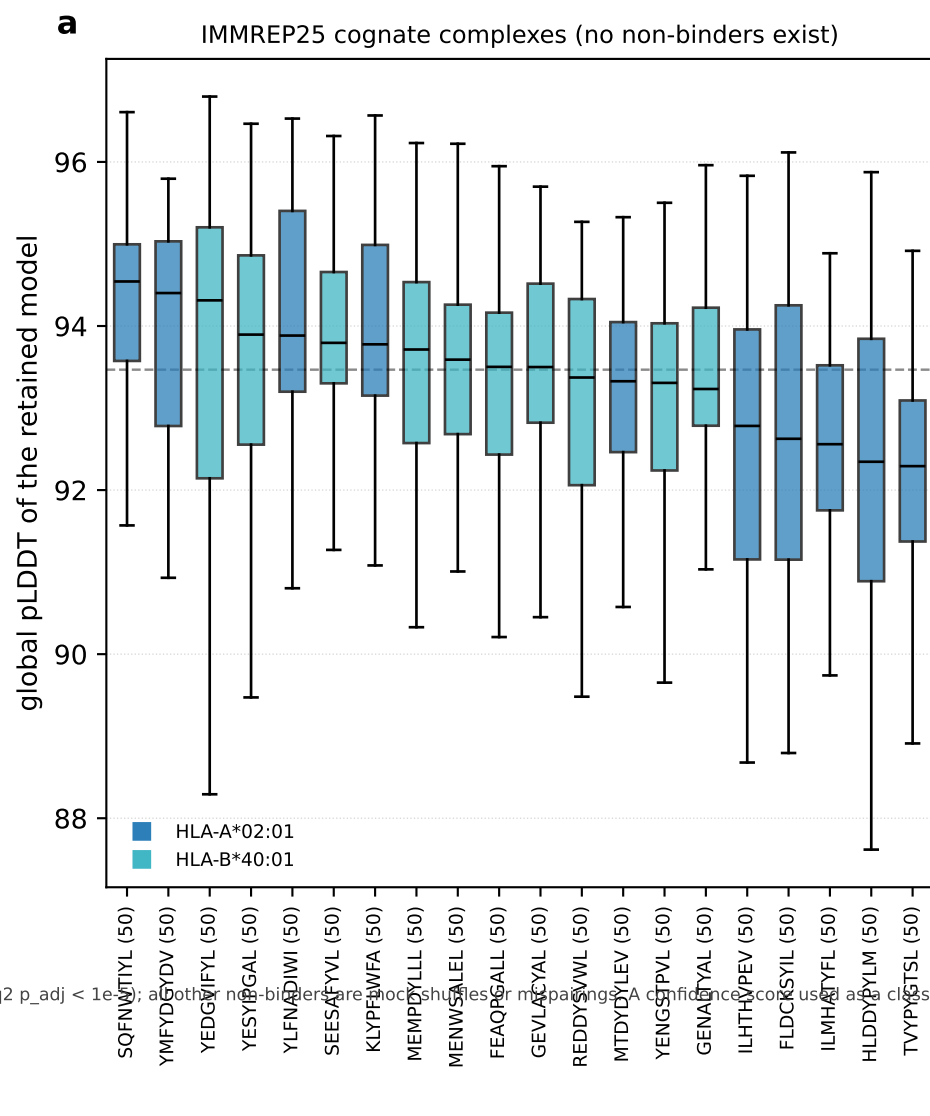

* assay-labelled (DESeq2 $p_{adj} < 1e-5$); all other non-binders are good shuffles for mapping. A confidence score used as a classifier needs one transferable operating point: if binder boxes do not align across sets, no single threshold works, and the over-peptide AUC the benchmark reports cannot detect it.