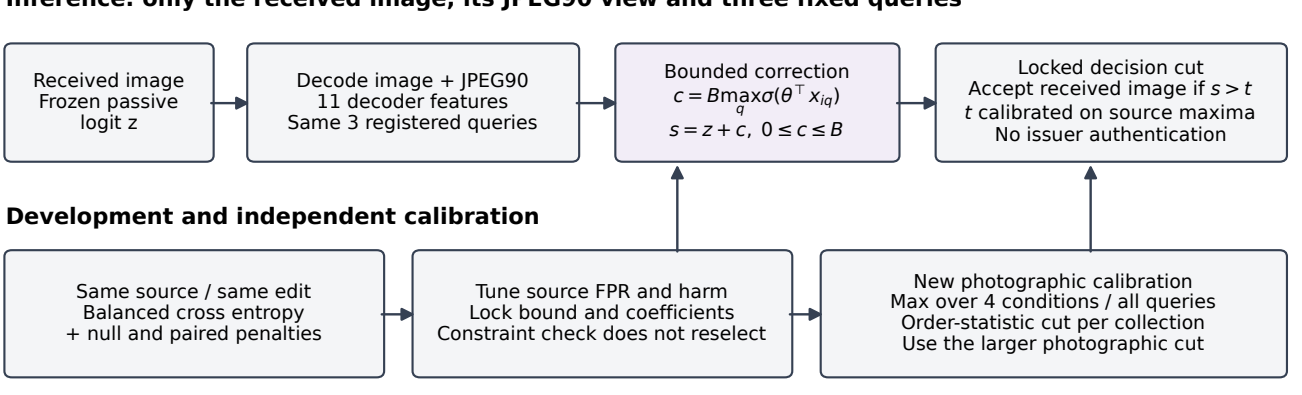

Training metadata never enters inference. Query search is identical across origins.
Nominal source-FPR control assumes exchangeability within the fixed collection and processing family.